

# Projekt čelične nadstrešnice shopping centra "King Cross"

---

Čoga, Filip

Master's thesis / Diplomski rad

2023

*Degree Grantor / Ustanova koja je dodijelila akademski / stručni stupanj:*

**University of Split, Faculty of Civil Engineering, Architecture and Geodesy / Sveučilište u Splitu, Fakultet građevinarstva, arhitekture i geodezije**

*Permanent link / Trajna poveznica:* <https://um.nsk.hr/um:nbn:hr:123:167564>

*Rights / Prava:* [In copyright](#)/[Zaštićeno autorskim pravom.](#)

*Download date / Datum preuzimanja:* **2024-07-23**



*Repository / Repozitorij:*

[FCEAG Repository - Repository of the Faculty of Civil Engineering, Architecture and Geodesy, University of Split](#)



UNIVERSITY OF SPLIT



**SVEUČILIŠTE U SPLITU  
FAKULTET GRAĐEVINARSTVA ARHITEKTURE I GEODEZIJE**

# **DIPLOMSKI RAD**

**Filip Čoga**

**Split, 2023.**



**SVEUČILIŠTE U SPLITU  
FAKULTET GRAĐEVINARSTVA ARHITEKTURE I GEODEZIJE**

**Filip Čoga**

**Projekt čelične nadstrešnice shopping centra „King  
Cross“**

**Diplomski rad**

**Split, 2023.**

## **Projekt čelične nadstrešnice shopping centra „King Cross“**

### ***Sažetak:***

Projekt nadogradnje i rekonstrukcije shopping centra „King Cross“ sadržava u sebi čeličnu nadstrešnicu na sjeveroistočnom pročelju građevine. Shopping centar se nalazi na području Zagreba. Proračun se provodi na temelju graničnog stanja nosivosti (GSN) i graničnog stanja uporabljivosti (GSU). Opterećenja koja se javljaju na konstrukciju su stalno (vlastita težina i dodatno stalno opterećenje) i promjenjivo (snijeg, vjetar i temperatura). Također je provjerena konstrukcija na seizmičko djelovanje. Iznosi unutarnjih sila dobiveni su u računalnom programu „SCIA Engineer 22.0“ uz pomoć kojeg je i provedeno dimenzioniranje prema HRN EN 1993. Spojevi su proračunati uz pomoć „IDEA Statica 22.1“ te su nacrti izrađeni uz pomoć „AutoCAD 23.0“ i „Allplan Nemetschek 2022“.

### ***Ključne riječi:***

Računalni program, HRN EN 1993, čelik, nadstrešnica, spojevi, nacrti

## **Steel canopy project of the shopping center „King Cross“**

### ***Abstract:***

The project of upgrade and reconstruction of the shopping center „King Cross“ includes steel canopy project on northeast facade. Shopping center is located in area of the Zagreb. Structure calculations are based on ultimate state (ULS) and serviceability limit state (SLS). Loads are permanent, variable (snow, wind and temperature) and seismic. The results of the internal forces were calculated and structural elements were designed using „Scia Engineer 22.0“. Structural joints were designed using „IDEA Statica 21.1“. Structural drawings were made using „AutoCAD 23“ and „Allplan Nemetschek 2022“.

### ***Keywords:***

Computer program, HRN EN 1993, steel, canopy, joints, drawings



**SVEUČILIŠTE U SPLITU  
FAKULTET GRAĐEVINARSTVA, ARHITEKTURE I GEODEZIJE**

STUDIJ: **DIPLOMSKI SVEUČILIŠNI STUDIJ GRAĐEVINARSTVA**

KANDIDAT: **Filip Čoga**

MATIČNI BROJ (JMBAG): **940**

KATEDRA: **Katedra za metalne i drvene konstrukcije**

PREDMET: **Metalne konstrukcije 2**

**ZADATAK ZA DIPLOMSKI RAD**

Tema: Projekt čelične nadstrešnice shopping centra "King Cross"

Opis zadatka: Na temelju arhitektonskih podloga potrebno je projektirati nosivu čeličnu konstrukciju nadstrešnice. Za nosivu čeličnu konstrukciju koristit će se čelik S355J2. Za konstrukciju temelja koristiti će se beton C30/37. Građevina se nalazi na području Zagreba.

U Splitu, ožujak 2023.

Voditelj Diplomskog rada:

Prof.dr.sc.Ivica Boko

Predsjednik Povjerenstva  
za završne i diplomske ispite:  
Izv. prof. dr. sc. Ivan Balić



## Sadržaj:

|             |   |            |
|-------------|---|------------|
| <b>1.</b>   | <b>Tehnički opis</b> .....  | <b>1</b>   |
| <b>2.</b>   | <b>Opis i prikaz 3D modela nadstrešnice</b> .....                   | <b>5</b>   |
| <b>2.1.</b> | <b>Karakteristike materijala</b> .....                              | <b>7</b>   |
| 2.1.1.      | Beton .....   | 7          |
| 2.1.2.      | Čelik .....   | 7          |
| <b>2.2.</b> | <b>Konstruktivni elementi u modelu</b> .....                        | <b>8</b>   |
| 2.2.1.      | Poprečni presjeci konstruktivnih elemenata .....                    | 9          |
| <b>3.</b>   | <b>Analiza opterećenja</b> .....                                    | <b>14</b>  |
| <b>3.1.</b> | <b>Stalno opterećenje</b> .....                                     | <b>15</b>  |
| 3.1.1.      | Vlastita težina konstrukcije .....                                  | 15         |
| 3.1.2.      | Dodatno stalno opterećenje .....                                    | 15         |
| <b>3.2.</b> | <b>Opterećenje snijegom</b> .....                                   | <b>18</b>  |
| <b>3.3.</b> | <b>Opterećenje vjetrom</b> .....                                    | <b>21</b>  |
| <b>3.4.</b> | <b>Opterećenje temperaturom</b> .....                               | <b>35</b>  |
| <b>3.5.</b> | <b>Modalna analiza</b> .....  | <b>37</b>  |
| <b>4.</b>   | <b>Dimenzioniranje konstrukcijskih elemenata</b> .....              | <b>52</b>  |
| <b>4.1.</b> | <b>Pokrovni elementi –„PK“</b> .....                                | <b>52</b>  |
| 4.1.1.      | Rezne sile pokrovnih elemenata .....                                | 53         |
| 4.1.2.      | Dimenzioniranje pokrovnih nosača .....                              | 63         |
| 4.1.3.      | Granično stanje uporabljivosti .....                                | 74         |
| <b>4.2.</b> | <b>Trostruki stup „S1“</b> .....                                    | <b>75</b>  |
| 4.2.1.      | Rezne sile trostrukog stupa „S1“ .....                              | 75         |
| 4.2.2.      | Dimenzioniranje trostrukog stupa „S1“ .....                         | 80         |
| 4.2.3.      | Granično stanje uporabljivosti .....                                | 89         |
| <b>4.3.</b> | <b>Kosi dio trostrukih stupova „SK“</b> .....                       | <b>90</b>  |
| 4.3.1.      | Rezne sile kosog dijela stupa „S1“ .....                            | 90         |
| 4.3.2.      | Dimenzioniranje kosog dijela stupa „S1“ .....                       | 95         |
| <b>4.4.</b> | <b>Stupovi niskog dijela nadstrešnice „S2“</b> .....                | <b>104</b> |
| 4.4.1.      | Rezne sile niskog dijela nadstrešnice „S2“ .....                    | 104        |
| 4.4.2.      | Dimenzioniranje rubnog stupa nadstrešnice „S1“ .....                | 107        |
| <b>4.5.</b> | <b>Rubni stup nadstrešnice „S3“</b> .....                           | <b>116</b> |
| 4.5.1.      | Rezne sile niskog dijela nadstrešnice „S3“ .....                    | 116        |
| 4.5.2.      | Dimenzioniranje rubnog stupa nadstrešnice „S3“ .....                | 119        |
| 4.5.3.      | Granično stanje uporabljivosti .....                                | 128        |
| <b>5.</b>   | <b>Dimenzioniranje spojeva</b> .....                                | <b>129</b> |
| <b>5.1.</b> | <b>Spoj stupa „S1“ sa temeljem</b> .....                            | <b>129</b> |
| <b>5.2.</b> | <b>Spoj stupa „S2“ sa temeljem</b> .....                            | <b>136</b> |
| <b>5.3.</b> | <b>Spoj kosog dijela stupa „S1“</b> .....                           | <b>147</b> |
| <b>5.4.</b> | <b>Karakteristični spoj sjecišta više štapova</b> .....             | <b>158</b> |
| <b>5.5.</b> | <b>Karakteristično spoj vrha stupa „S2“</b> .....                   | <b>170</b> |
| <b>5.6.</b> | <b>Spoj vrha stupa „S3“</b> .....                                   | <b>182</b> |
| <b>5.7.</b> | <b>Karakteristični spoj pokrova</b> .....                           | <b>192</b> |
| <b>5.8.</b> | <b>Karakteristični spoj pokrova i kosog dijela stupa „S1“</b> ..... | <b>219</b> |
| <b>5.9.</b> | <b>Vlačni spoj rubnog stupa „S2“</b> .....                          | <b>226</b> |



|        |  |     |
|--------|--|-----|
| 5.10.  | Vlačni spoj trostrukog stupa „S1“ .....  | 232 |
| 6.     | AB MONOLITNI ELEMENTI KONSTRUKCIJE ..... | 238 |
| 6.1.   | AB temeljne stope .....                  | 238 |
| 6.1.1. | Temeljna stopa „TS1“ .....               | 238 |
| 6.1.2. | Temeljna stopa „TS2“ .....               | 244 |
| 6.1.1. | Temeljna stopa „TS3“ .....               | 250 |

# 1. Tehnički opis

## Općenito

Ovim diplomskim radom obrađen je projekt nadogradnje i rekonstrukcije shopping centra „King Cross“, specifično čelične nadstrešnice na sjeveroistočnom pročelju građevine. Zahvat obuhvaća izgradnju čelične nadstrešnice s pripadajućim temeljima samcima.

## Lokacija

Gradnja predmetne građevine je predviđena u ulici Velimira Škoprika 34 na parceli postojećeg shopping centra. Nadstrešnica se pruža duž cijelog sjeveroistočnog pročelja.

## Karakteristike i namjena građevine

Predmetna nadstrešnica će primarno imati estetsku funkciju. Duljina nadstrešnice u smjeru pročelja je cca 270 m dok se širina kreće od 3 do 16 m. Visina konstrukcije varira na najnižem dijelu oko 5 m dok na najvišem od 13 do 16 m. Svi konstruktivni elementi su čelični izuzev temeljnih stopa koje su betonske.

## Opis konstrukcije

Nosivu konstrukciju čini sustav čeličnih stupova i greda u razini pokrova. Pokrov i cjelokupna konstrukcija je nepravilnog oblika.

Stupovi „S1“ (CFCHS 219 x 12,5), „S2“ (CFCHS 355,6 x 8,0) i „S3“ (CFCHS 355,6 x 8,0) su povezani upetom vezom za AB temelje samce te su raspoređeni po nepravilnom rasteru. Stupovi „S1“ se postavljaju jedan do drugoga te se pri vrhu povezuju kratkim elementima istog poprečnog presjeka kako bi se osigurala dostatna krutost sustava. Kosi dijelovi stupa „SK1“ (CFCHS 219 x 12,5) se nastavljaju iznad čvorova na kojima su stupovi ukrućeni te prihvaćaju barem u jednom čvoru krovne nosače „PK“ (CFCHS 273x8,0) koji na sebi pridržavaju pokrov. Pokrov je formiran od ravnih žica između strukturalnog trokuta kojeg formiraju pokrovni elementi „PK“. Pokrovni elementi su uglavnom nenatrikveni i međusobno su spojeni varom, čeonim varom ili spojnom pločicom. Ukrućni elementi stupa „S1“ su spojeni varom dok su sami stupovi čeonom pločicom uhvaćeni za kosi dio stupa

„SK1“. Na zapadnom rubu nadstrešnice se nalazi rubni stup „S3“ dok su na najnižem dijelu stupovi „S2“. „TS1“ je AB temelj samac stupova „S1“ i „S2“ dimenzija 220 x 220 x 100 cm, „TS2“ dimenzija 300 x 300 x 100 je temelj samac stupa „S3“ i stupova „S1“. Samci „TS3“ 250 x 250 x 100 nalaze se podno stupova „S1“ na sjeveroistočnom rubu nadstrešnice.

### **Materijal za izradu konstrukcije**

Svi čelični elementi su klase S 355. Konstruktivni elementi će međusobno biti povezani s varovima te vlačnim nastavkom s pločicama i vijcima kvalitete M 20 8,8. Spoj stupa sa samcima je izveden pomoću podne pločice koja je povezana s ankerima kvalitete M30 10,9 za stupove „S1“ i „S3“ te M20 10,9 za stupove „S2“. Karakteristični spoj sjecišta više elemenata i spojeva gdje se elementi završavaju korištenu su ukrutne pločice kvalitete S 355. Pokrovna konstrukcija je mreža tankih žica. Za temelje samce je korišten beton kvalitete C 30/37.

### **Antikorozivna zaštita**

Odabrana je zaštita pocinčavanjem koja se ostvaruje nanošenjem prevlake cinka i po toplom postupku. Mase i debljine prevlaka cinka za pojedine elemente određene su prema Pravilniku o tehničkim mjerama i uvjetima za zaštitu čeličnih konstrukcija od korozije i ne mogu biti manje od 500 mg/m<sup>2</sup> elementa debljine 5mm. Sve čelične konstrukcije prethodno treba odmastiti, očistiti razblaženom otopinom klorovodične kiseline te isprati hladnom vodom. Neposredno prije pocinčavanja čelična konstrukcija se stavlja u taljevinu ili otopinu za flusiranje.

Toplo pocinčavanje se izvodi stavljanjem tekućine u rastopljeni cink. Cink mora biti kvaliteta Zn 97,5 do Zn 99,5 prema HRN EN ISO 14713:2001. Prevlaka cinka dobivena toplim postupkom mora biti homogena i mora prekrivati osnovicu. Prevlaka cinka mora čvrsto prijanjati za čeličnu površinu i ne smije se ljuštiti niti pucati pri uporabi. Prije montaže potrebno je izvršiti kontrolu prevlake cinka prema HRN C.A1. 558, odnosno mase prevlake cinka prema HRN A6.021.

## Montaža konstrukcije

Izvedba konstrukcije je na licu mjesta varenjem. Svi elementi konstrukcije predgotovljeni stižu na gradilište. Stupovi se međusobno vežu vijčanim spojem. Nulta faza montaže, nakon izvedenih svih prethodnih radova je montaža stupova. Stup se postavi na ankere koji su postavljeni u temelje te se pridrži dizalicom dok se ne postigne vertikalnost pomoću dvostrukih vijaka. Nakon provjere vertikalnosti, vrši se ispunjenje prostora ispod spojne ploče i temelja ekspandirajućim mortom.

## Zaštitni sloj betona do armature

Minimalna debljina zaštitnog sloja betona se utvrđuje u ovisnosti o razredu izloženosti (suhi okoliš), načinu armiranja te traženoj požarnoj otpornosti elemenata konstrukcije.

Za razred izloženosti XC2 (temelji samci)  $c_{min.}=35$  mm.

U skladu sa navedenim, imajući u vidu traženu vatrootpornost usvaja se za:

- Temelji  $c_{nom.}= 35$  mm

## Temeljenje

Na predmetnoj lokaciji očekivana projektirana nosivost temeljnog tla iznosi:  
 $q_{Rd}=300,0$  kN/m<sup>2</sup>



## Lokacija i opterećenja

Sva opterećenja na konstrukciju uzeta su prema Europskoj normi EN-1991.

## Opterećenje vjetrom

Opterećenje vjetrom odabrano je prema: EC1, Dio 2-4: Djelovanja vjetra i Europskoj normi EN 1991-2-4: Djelovanja na konstrukcije opterećene vjetrom te Nacionalnom dokumentu za primjenu u Republici Hrvatskoj .

**Shopping centar „King Cross“** lociran je u gradu Zagrebu u ulici Velimira Škorpika 34 na k.č.br. 2761/1, 2766, 2767, 2703/1, 2703/2, 2704/2 sve k.o. Podsused. Prema Karti osnovne brzine vjetra RH kao osnovna brzina vjetra uzeta je  $v_{b,0}=25,0$  m/s.

## Opterećenje snijegom


**Shopping centar „King Cross“** lociran je u gradu Zagrebu u ulici Velimira Škorpika 34 na k.č.br. 2761/1, 2766, 2767, 2703/1, 2703/2, 2704/2 sve k.o. Podsused te prema važećim propisima proračunsko opterećenje snijegom iznosi:

$$S_k = 1,25 \text{ kN/m}^2$$


## Seizmičke značajke terena

**Shopping centar „King Cross“** lociran je u gradu Zagrebu u ulici Velimira Škorpika 34 na k.č.br. 2761/1, 2766, 2767, 2703/1, 2703/2, 2704/2 sve k.o. Podsused . Ubrzanje tla za promatranu lokaciju iznosi  $a_g=0.252$  g za povratni period od 475 godina te  $a'_g=0.127$  g za povratni period od 95 godina. Temeljno tlo se prema Eurocodu može svrstati u razred “C” (po dokumentu HRN ENV, 1998-1-1:2004).


## 2. Opis i prikaz 3D modela nadstrešnice

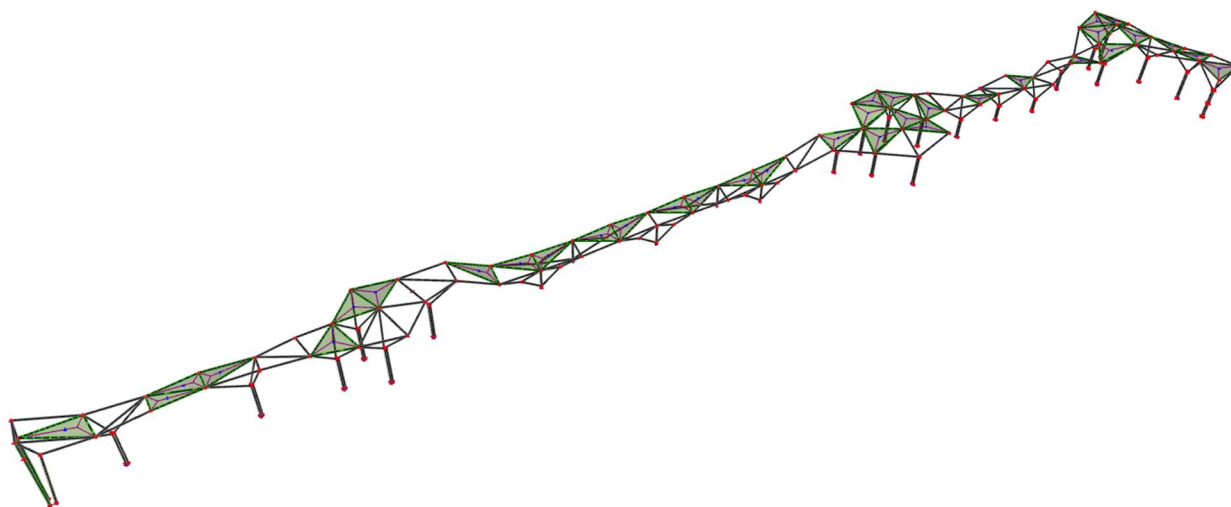


*Slika 1: Aksonometrijski prikaz nadstrešnice*

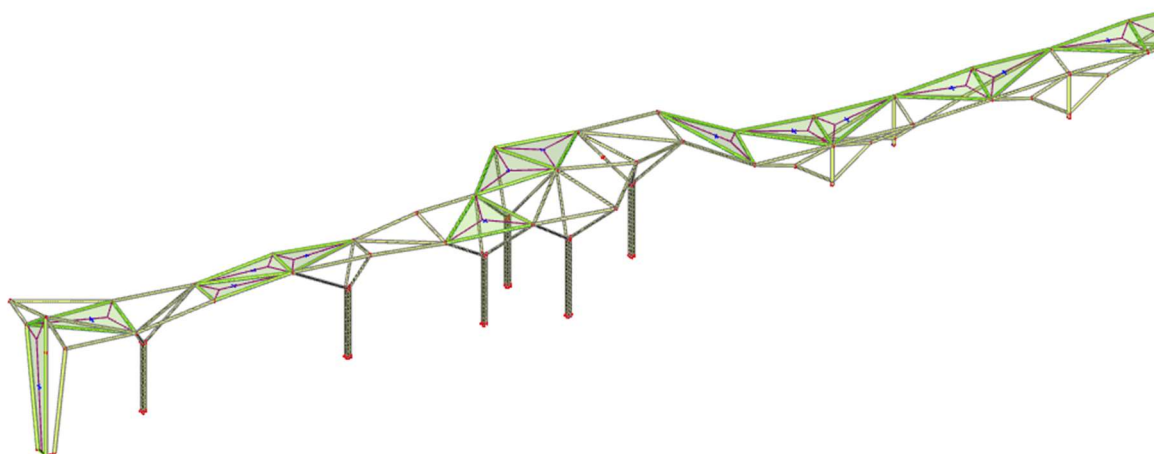

*Slika 2: Aksonometrijski prikaz modela od osi N1 do osi N8*

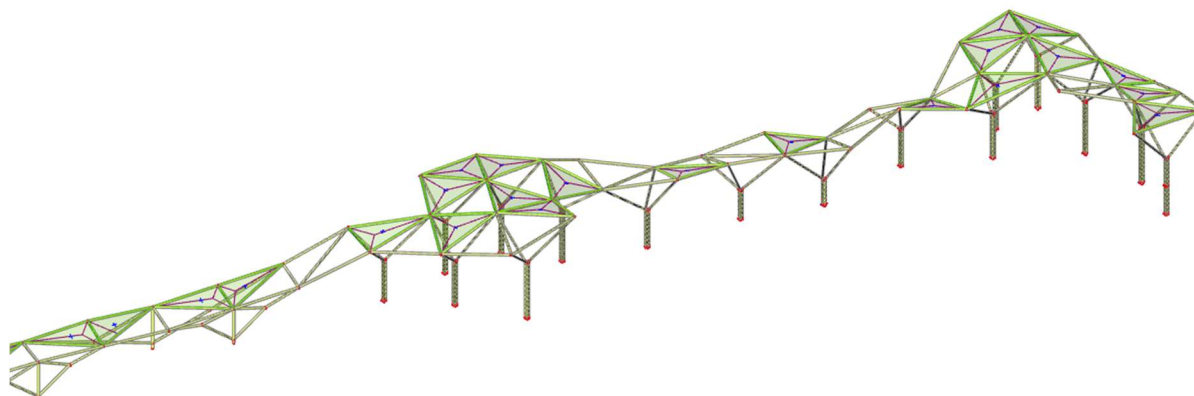


*Slika 3: Aksonometrijski prikaz modela od osi N8 do osi N27*

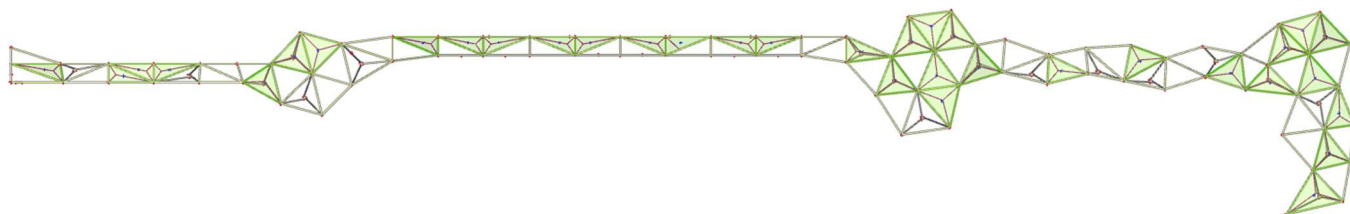


*Slika 4: Tlocrtni prikaz nadstrešnice*

:

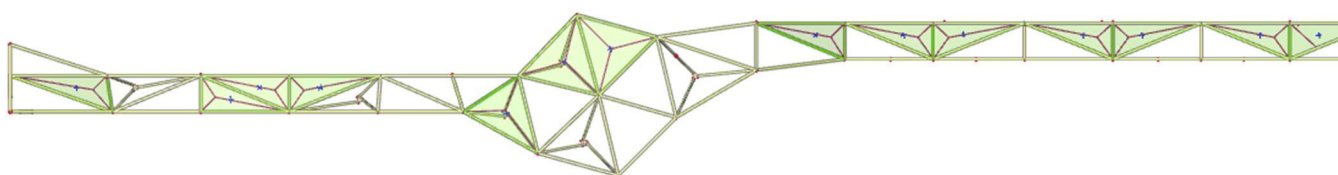

*Slika 5: Tlocrtni prikaz nadstrešnice od osi N1 do osi N8*

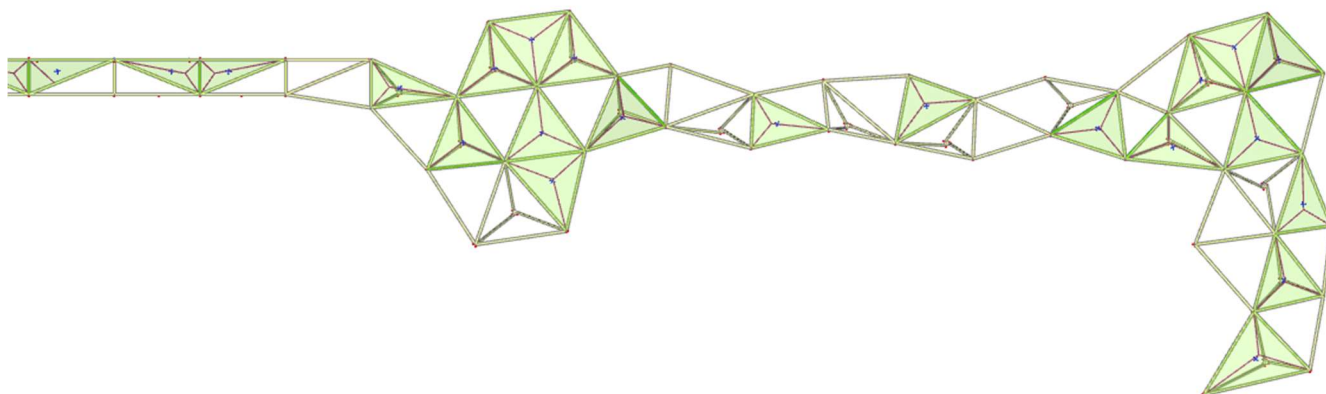

*Slika 6: Tlocrtni prikaz nadstrešnice od osi N8 do osi N27*

## 2.1. Karakteristike materijala


### 2.1.1. Beton

|   |            |
|---|------------|
| Materijal   | Beton      |
| Klasa betona  | C30/37     |
| Jedinična masa $\rho$ [kg/m <sup>3</sup> ]                              | 2500.0     |
| Modul elastičnosti $E_{mod}$ [MPa]                                      | 3.1500e+04 |
| Modul posmika $G$ [MPa]   | 1.3667e+04 |
| Poissonov koeficijent $\mu$   | 0.2        |
| karakteristična tlačna čvrstoća betona nakon 28 dana $f_{c,k,28}$ [MPa] | 30.00      |
| srednja tlačna čvrstoća $f_{cm}$ [MPa]                                  | 38.00      |
| $f_{cm}(28) - f_{ck}(28)$ [MPa]   | 25.00      |
| srednja osna vlačna čvrstoća $f_{ctm}$ [MPa]                            | 2.90       |
| proračunska tlačna čvrstoća (osnovna komb.) $f_{cd}$ [MPa]              | 20         |
| proračunska tlačna čvrstoća (izvanredna komb.) $f_{cd}$ [MPa]           | 25         |


### 2.1.2. Čelik

|  |            |
|--|------------|
| Klasa čelika                               | S 355      |
| Jedinična masa $\rho$ [kg/m <sup>3</sup> ] | 7850.0     |
| Modul elastičnosti $E_{mod}$ [MPa]         | 2.1000e+05 |
| Modul posmika $G_{mod}$ [MPa]              | 8.0769e+04 |
| Poissonov koeficijent $\mu$                | 0.3        |
| $F_y$ [MPa]                                | 355.0      |

## 2.2. Konstruktivni elementi u modelu

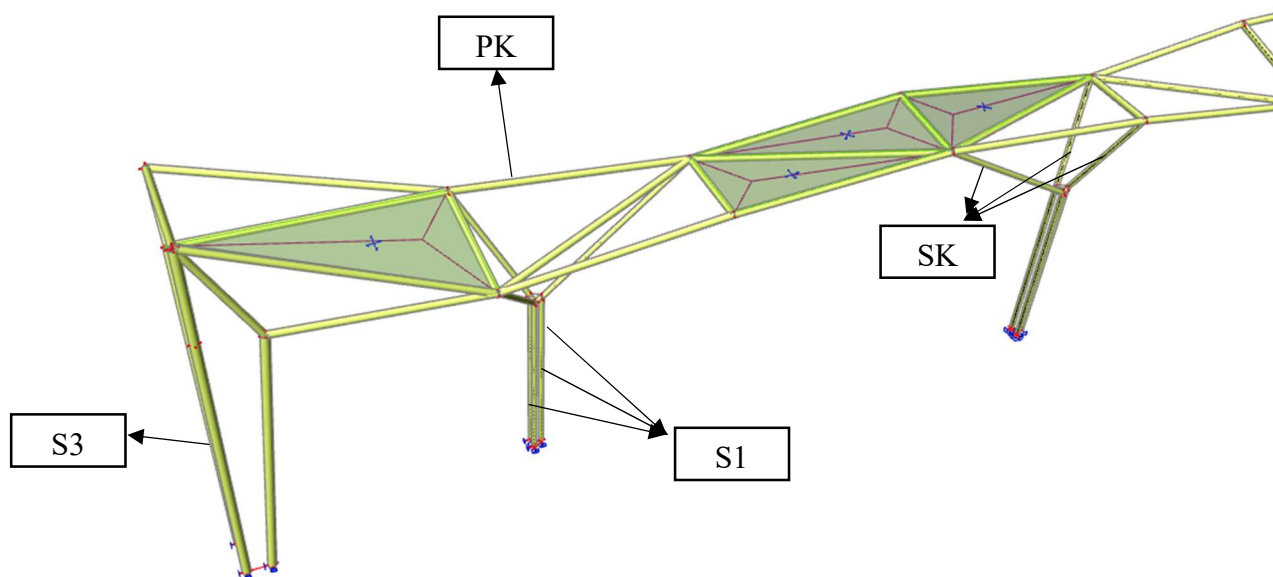
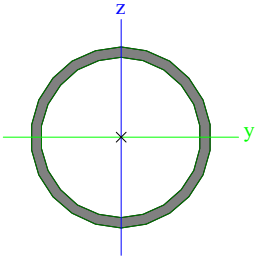


*Slika 7: Prikaz konstruktivnih elemenata u modelu*

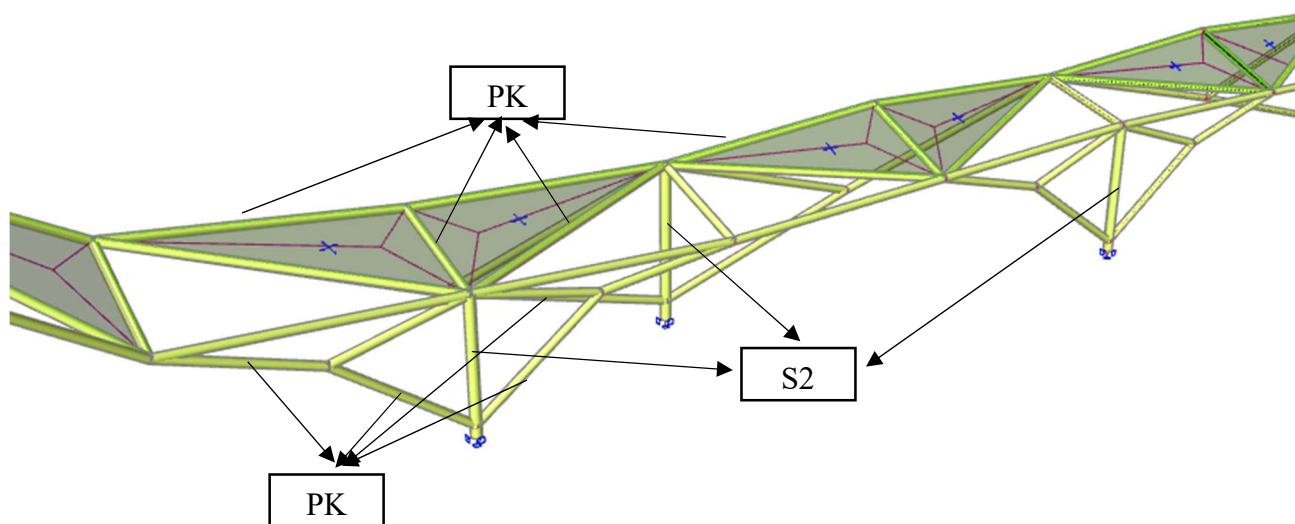
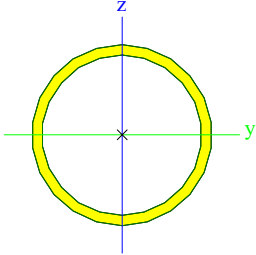


*Slika 8: Prikaz konstruktivnih elemenata u modelu*


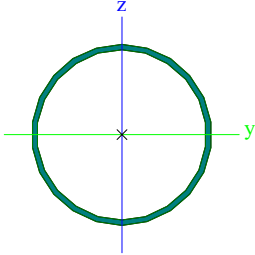
## 2.2.1. Poprečni presjeci konstruktivnih elemenata

| Trostruki stup – „S1“  |  |            |
|--|--|------------|
| Type   | CFCHS219.1X12.5  |            |
| Formcode   | 3 - Circular hollow section  |            |
| Shape type   | Thin-walled  |            |
| Item material  | S 355  |            |
| Fabrication  | cold formed  |            |
| Colour   |   |            |
| Flexural buckling y-y, Flexural buckling z-z                             | c  | c          |
| A [m <sup>2</sup> ]  | 8,1130e-03   |            |
| A <sub>y</sub> [m <sup>2</sup> ], A <sub>z</sub> [m <sup>2</sup> ]       | 5,1650e-03   | 5,1650e-03 |
| A <sub>L</sub> [m <sup>2</sup> /m], A <sub>D</sub> [m <sup>2</sup> /m]   | 6,8800e-01   | 1,2980e+00 |
| C <sub>y,UCS</sub> [mm], C <sub>z,UCS</sub> [mm]                         | 110  | 110        |
| α [deg]  | 0,00   |            |
| I <sub>y</sub> [m <sup>4</sup> ], I <sub>z</sub> [m <sup>4</sup> ]       | 4,3446e-05   | 4,3446e-05 |
| i <sub>y</sub> [mm], i <sub>z</sub> [mm]                                 | 73   | 73         |
| W <sub>el,y</sub> [m <sup>3</sup> ], W <sub>el,z</sub> [m <sup>3</sup> ] | 3,9658e-04   | 3,9658e-04 |
| W <sub>pl,y</sub> [m <sup>3</sup> ], W <sub>pl,z</sub> [m <sup>3</sup> ] | 5,3420e-04   | 5,3420e-04 |
| M <sub>pl,y,+</sub> [Nm], M <sub>pl,y,-</sub> [Nm]                       | 189581,66  | 189581,66  |
| M <sub>pl,z,+</sub> [Nm], M <sub>pl,z,-</sub> [Nm]                       | 189581,66  | 189581,66  |
| d <sub>y</sub> [mm], d <sub>z</sub> [mm]                                 | 0  | 0          |
| I <sub>t</sub> [m <sup>4</sup> ], I <sub>w</sub> [m <sup>6</sup> ]       | 8,6892e-05   | 8,8785e-40 |
| β <sub>y</sub> [mm], β <sub>z</sub> [mm]                                 | 0  | 0          |
| Picture  |  |            |

Tablica 1: Geometrijske karakteristike karakterističnog stupa „S1“ – CFRHS 219.1x12.5


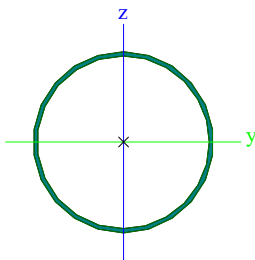
| Kosi dio stupa S1-,, SK1"  |   |            |
|--|---|------------|
| Type   | CFCHS219.1X12.5   |            |
| Formcode   | 3 - Circular hollow section   |            |
| Shape type   | Thin-walled   |            |
| Item material  | S 355   |            |
| Fabrication  | cold formed   |            |
| Colour   |    |            |
| Flexural buckling y-y, Flexural buckling z-z                             | c   | c          |
| A [m <sup>2</sup> ]  | 8,1130e-03  |            |
| A <sub>y</sub> [m <sup>2</sup> ], A <sub>z</sub> [m <sup>2</sup> ]       | 5,1650e-03  | 5,1650e-03 |
| A <sub>L</sub> [m <sup>2</sup> /m], A <sub>0</sub> [m <sup>2</sup> /m]   | 6,8800e-01  | 1,2980e+00 |
| C <sub>y,UCS</sub> [mm], C <sub>z,UCS</sub> [mm]                         | 110   | 110        |
| α [deg]  | 0,00  |            |
| I <sub>y</sub> [m <sup>4</sup> ], I <sub>z</sub> [m <sup>4</sup> ]       | 4,3446e-05  | 4,3446e-05 |
| i <sub>y</sub> [mm], i <sub>z</sub> [mm]                                 | 73  | 73         |
| W <sub>el,y</sub> [m <sup>3</sup> ], W <sub>el,z</sub> [m <sup>3</sup> ] | 3,9658e-04  | 3,9658e-04 |
| W <sub>pl,y</sub> [m <sup>3</sup> ], W <sub>pl,z</sub> [m <sup>3</sup> ] | 5,3420e-04  | 5,3420e-04 |
| M <sub>pl,y,+</sub> [Nm], M <sub>pl,y,-</sub> [Nm]                       | 189581,66   | 189581,66  |
| M <sub>pl,z,+</sub> [Nm], M <sub>pl,z,-</sub> [Nm]                       | 189581,66   | 189581,66  |
| d <sub>y</sub> [mm], d <sub>z</sub> [mm]                                 | 0   | 0          |
| I <sub>t</sub> [m <sup>4</sup> ], I <sub>w</sub> [m <sup>6</sup> ]       | 8,6892e-05  | 8,8785e-40 |
| β <sub>y</sub> [mm], β <sub>z</sub> [mm]                                 | 0   | 0          |
| Picture  |  |            |

Tablica 2: Geometrijske karakteristike kosog dijela karakterističnog stupa „S1“ - CFRHS 219.1x12.5


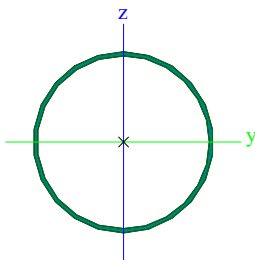
| Krovni nosači – „PK“   |  |            |
|--|--|------------|
| Type   | CFCHS273X8   |            |
| Formcode   | 3 - Circular hollow section  |            |
| Shape type   | Thin-walled  |            |
| Item material  | S 355  |            |
| Fabrication  | cold formed  |            |
| Colour   |   |            |
| Flexural buckling y-y, Flexural buckling z-z                             | c  | c          |
| A [m <sup>2</sup> ]  | 6,6600e-03   |            |
| A <sub>y</sub> [m <sup>2</sup> ], A <sub>z</sub> [m <sup>2</sup> ]       | 4,2400e-03   | 4,2400e-03 |
| A <sub>L</sub> [m <sup>2</sup> /m], A <sub>D</sub> [m <sup>2</sup> /m]   | 8,5800e-01   | 1,6650e+00 |
| C <sub>y,UCS</sub> [mm], C <sub>z,UCS</sub> [mm]                         | 136  | 136        |
| α [deg]  | 0,00   |            |
| I <sub>y</sub> [m <sup>4</sup> ], I <sub>z</sub> [m <sup>4</sup> ]       | 5,8517e-05   | 5,8517e-05 |
| i <sub>y</sub> [mm], i <sub>z</sub> [mm]                                 | 94   | 94         |
| W <sub>el,y</sub> [m <sup>3</sup> ], W <sub>el,z</sub> [m <sup>3</sup> ] | 4,2870e-04   | 4,2870e-04 |
| W <sub>pl,y</sub> [m <sup>3</sup> ], W <sub>pl,z</sub> [m <sup>3</sup> ] | 5,6197e-04   | 5,6197e-04 |
| M <sub>pl,y,+</sub> [Nm], M <sub>pl,y,-</sub> [Nm]                       | 199438,82  | 199438,82  |
| M <sub>pl,z,+</sub> [Nm], M <sub>pl,z,-</sub> [Nm]                       | 199438,82  | 199438,82  |
| d <sub>y</sub> [mm], d <sub>z</sub> [mm]                                 | 0  | 0          |
| I <sub>t</sub> [m <sup>4</sup> ], I <sub>w</sub> [m <sup>6</sup> ]       | 1,1703e-04   | 8,0163e-40 |
| β <sub>y</sub> [mm], β <sub>z</sub> [mm]                                 | 0  | 0          |
| Picture  |  |            |

Tablica 3: Geometrijske karakteristike karakterističnog krovnog nosača „PK“ – CFRHS 273x8



| Stup niskog dijela nadstrešnice – „S2“                                   |  |            |
|--|--|------------|
| Type   | CFCHS355.6X8   |            |
| Formcode   | 3 - Circular hollow section  |            |
| Shape type   | Thin-walled  |            |
| Item material  | S 355  |            |
| Fabrication  | cold formed  |            |
| Colour   |   |            |
| Flexural buckling y-y, Flexural buckling z-z                             | c  | c          |
| A [m <sup>2</sup> ]  | 8,7360e-03   |            |
| A <sub>y</sub> [m <sup>2</sup> ], A <sub>z</sub> [m <sup>2</sup> ]       | 5,5616e-03   | 5,5616e-03 |
| A <sub>L</sub> [m <sup>2</sup> /m], A <sub>0</sub> [m <sup>2</sup> /m]   | 1,1170e+00   | 2,1839e+00 |
| C <sub>y,UCS</sub> [mm], C <sub>z,UCS</sub> [mm]                         | 178  | 178        |
| α [deg]  | 0,00   |            |
| I <sub>y</sub> [m <sup>4</sup> ], I <sub>z</sub> [m <sup>4</sup> ]       | 1,3201e-04   | 1,3201e-04 |
| i <sub>y</sub> [mm], i <sub>z</sub> [mm]                                 | 123  | 123        |
| W <sub>el,y</sub> [m <sup>3</sup> ], W <sub>el,z</sub> [m <sup>3</sup> ] | 7,4250e-04   | 7,4250e-04 |
| W <sub>pl,y</sub> [m <sup>3</sup> ], W <sub>pl,z</sub> [m <sup>3</sup> ] | 9,6680e-04   | 9,6680e-04 |
| M <sub>pl,y,+</sub> [Nm], M <sub>pl,y,-</sub> [Nm]                       | 343101,21  | 343101,21  |
| M <sub>pl,z,+</sub> [Nm], M <sub>pl,z,-</sub> [Nm]                       | 343101,21  | 343101,21  |
| d <sub>y</sub> [mm], d <sub>z</sub> [mm]                                 | 0  | 0          |
| I <sub>t</sub> [m <sup>4</sup> ], I <sub>w</sub> [m <sup>6</sup> ]       | 2,6403e-04   | 7,8644e-39 |
| β <sub>y</sub> [mm], β <sub>z</sub> [mm]                                 | 0  | 0          |
| Picture  |  |            |

Tablica 4: Geometrijske karakteristike karakterističnog stupa „S2“ – CFRHS 355.6x12

| Rubni stup nadstrešnice -S3  |  |            |
|--|--|------------|
| Type   | CFCHS355.6X8   |            |
| Formcode   | 3 - Circular hollow section  |            |
| Shape type   | Thin-walled  |            |
| Item material  | S 355  |            |
| Fabrication  | cold formed  |            |
| Colour   |   |            |
| Flexural buckling y-y, Flexural buckling z-z                             | c  | c          |
| A [m <sup>2</sup> ]  | 8,7360e-03   |            |
| A <sub>y</sub> [m <sup>2</sup> ], A <sub>z</sub> [m <sup>2</sup> ]       | 5,5616e-03   | 5,5616e-03 |
| A <sub>L</sub> [m <sup>2</sup> /m], A <sub>0</sub> [m <sup>2</sup> /m]   | 1,1170e+00   | 2,1839e+00 |
| C <sub>y,UCS</sub> [mm], C <sub>z,UCS</sub> [mm]                         | 178  | 178        |
| α [deg]  | 0,00   |            |
| I <sub>y</sub> [m <sup>4</sup> ], I <sub>z</sub> [m <sup>4</sup> ]       | 1,3201e-04   | 1,3201e-04 |
| i <sub>y</sub> [mm], i <sub>z</sub> [mm]                                 | 123  | 123        |
| W <sub>el,y</sub> [m <sup>3</sup> ], W <sub>el,z</sub> [m <sup>3</sup> ] | 7,4250e-04   | 7,4250e-04 |
| W <sub>pl,y</sub> [m <sup>3</sup> ], W <sub>pl,z</sub> [m <sup>3</sup> ] | 9,6680e-04   | 9,6680e-04 |
| M <sub>pl,y,+</sub> [Nm], M <sub>pl,y,-</sub> [Nm]                       | 343101,21  | 343101,21  |
| M <sub>pl,z,+</sub> [Nm], M <sub>pl,z,-</sub> [Nm]                       | 343101,21  | 343101,21  |
| d <sub>y</sub> [mm], d <sub>z</sub> [mm]                                 | 0  | 0          |
| I <sub>t</sub> [m <sup>4</sup> ], I <sub>w</sub> [m <sup>6</sup> ]       | 2,6403e-04   | 7,8644e-39 |
| β <sub>y</sub> [mm], β <sub>z</sub> [mm]                                 | 0  | 0          |
| Picture  |  |            |

Tablica 5: Geometrijske karakteristike rubnog stupa „S3“ – CFRHS 355.6x8

### 3. Analiza opterećenja

Opterećenje u modelu je zadano kao površinsko po panelima koji simuliraju pokrov napravljen od žica između trokutastog strukturalnog elementa sačinjenog od krovnih elemenata „PK“. Opterećenje se preko panela direktno prenosi na krovne nosače s kojih se prenosi do stupova sve do temelja. Promjenjiva djelovanja vjetra, temperature i snijega su nanesena i na profile.

#### Popis opterećenja primijenjenih u modelu

| Opterećenje              | Smjer opterećenja  |
|--------------------------|--------------------|
| dg - dodatno stalno      | Z                  |
| Wp- pritisak             | Z                  |
| Wo - odizanje            | Z                  |
| Wx - pritisak            | X                  |
| Wy - pritisak            | Y                  |
| $T^+$ - zagrijavanje     | u smjeru osi štapa |
| $T^+$ - hlađenje         | u smjeru osi štapa |
| S - snijeg               | Z                  |
| Sx- seizmičko djelovanje | X                  |
| Sy- seizmičko djelovanje | Y                  |

Tablica 6: Prikaz opterećenja zadanih u modelu


### 3.1. Stalno opterećenje

#### 3.1.1. Vlastita težina konstrukcije


Vlastita težina konstrukcija je automatski uzeta u obzir unutar software-a.

#### 3.1.2. Dodatno stalno opterećenje


- 1) Opterećenje pokrova konstrukcije -  $20 \text{ kg/m}^2$
- 2) Opterećenje rasvjete stupova nadstrešnice -  $20 \text{ kg/m}'$

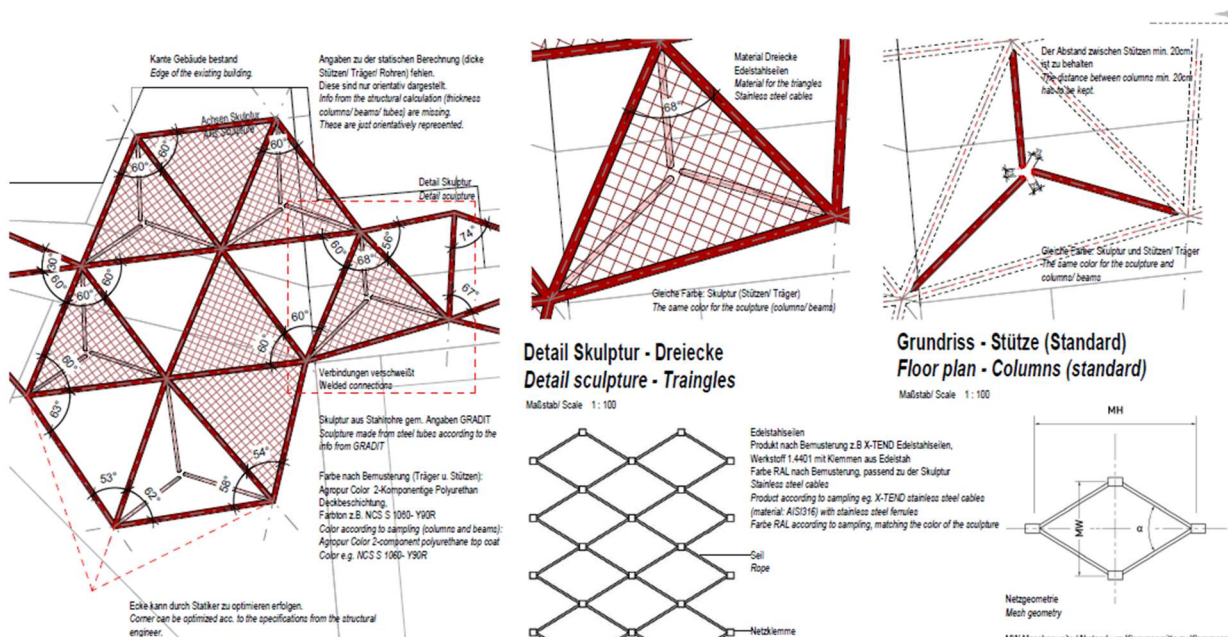


Slika 9: Prikaz pokrova nadstrešnice

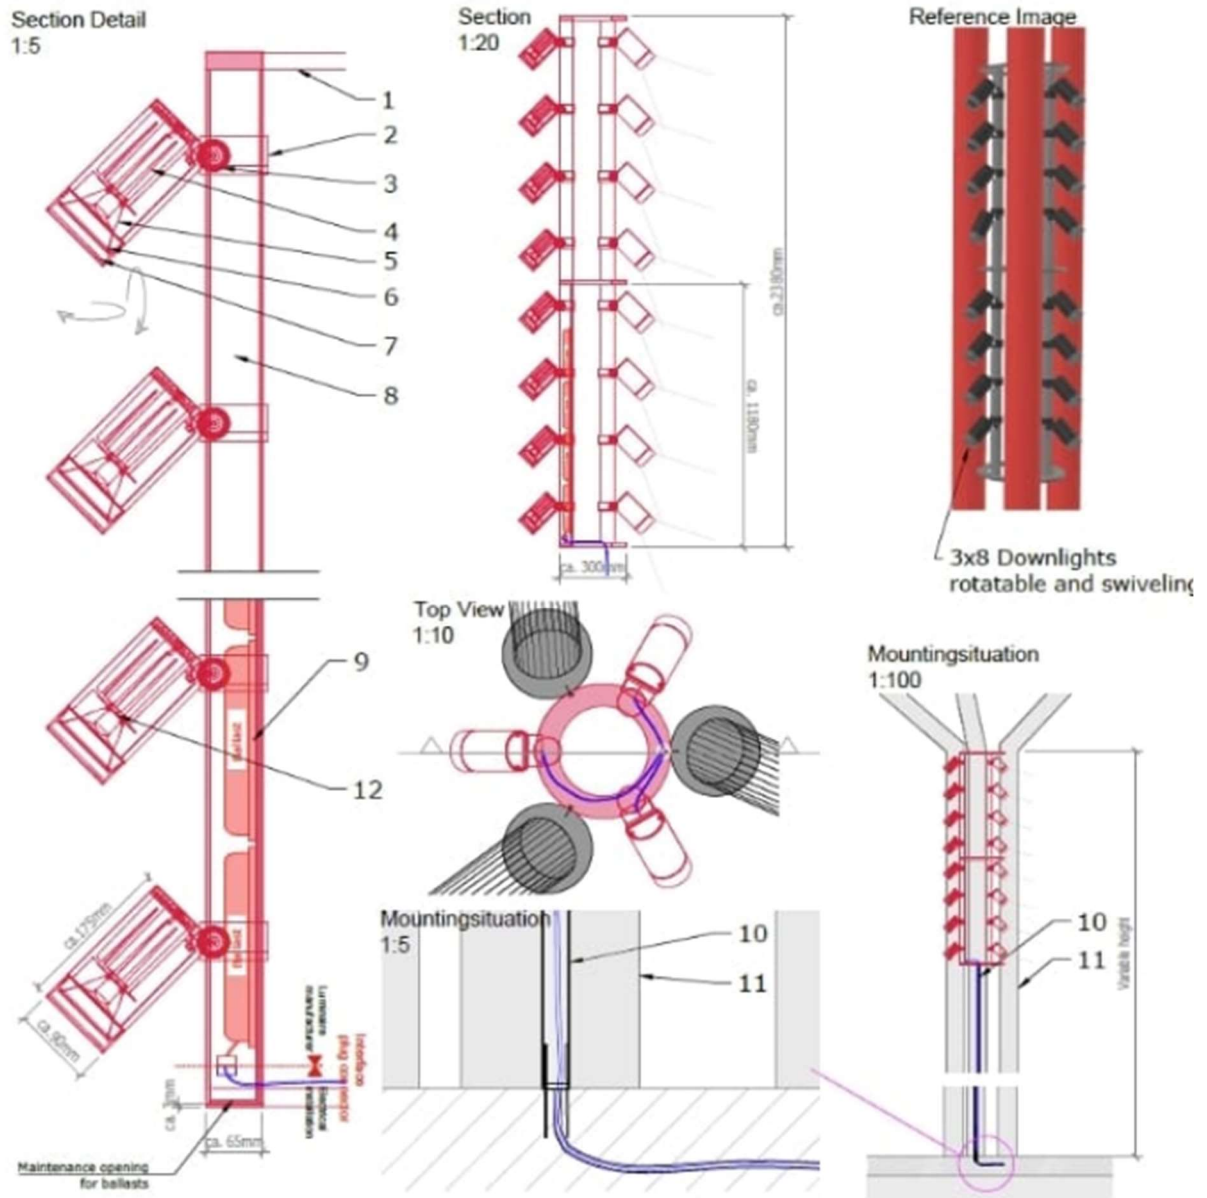

Slika 10: Prikaz rasvjete stupova

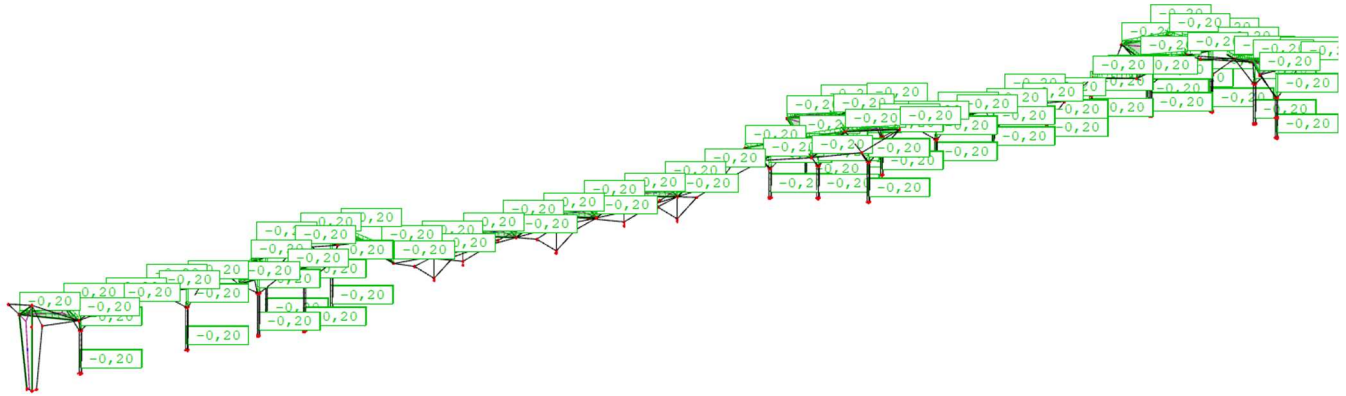

Slika 11: Prikaz dodatnog stalnog opterećenja „dg“  
( $kN/m^2$ -pokrov;  $kN/m'$ -profili)

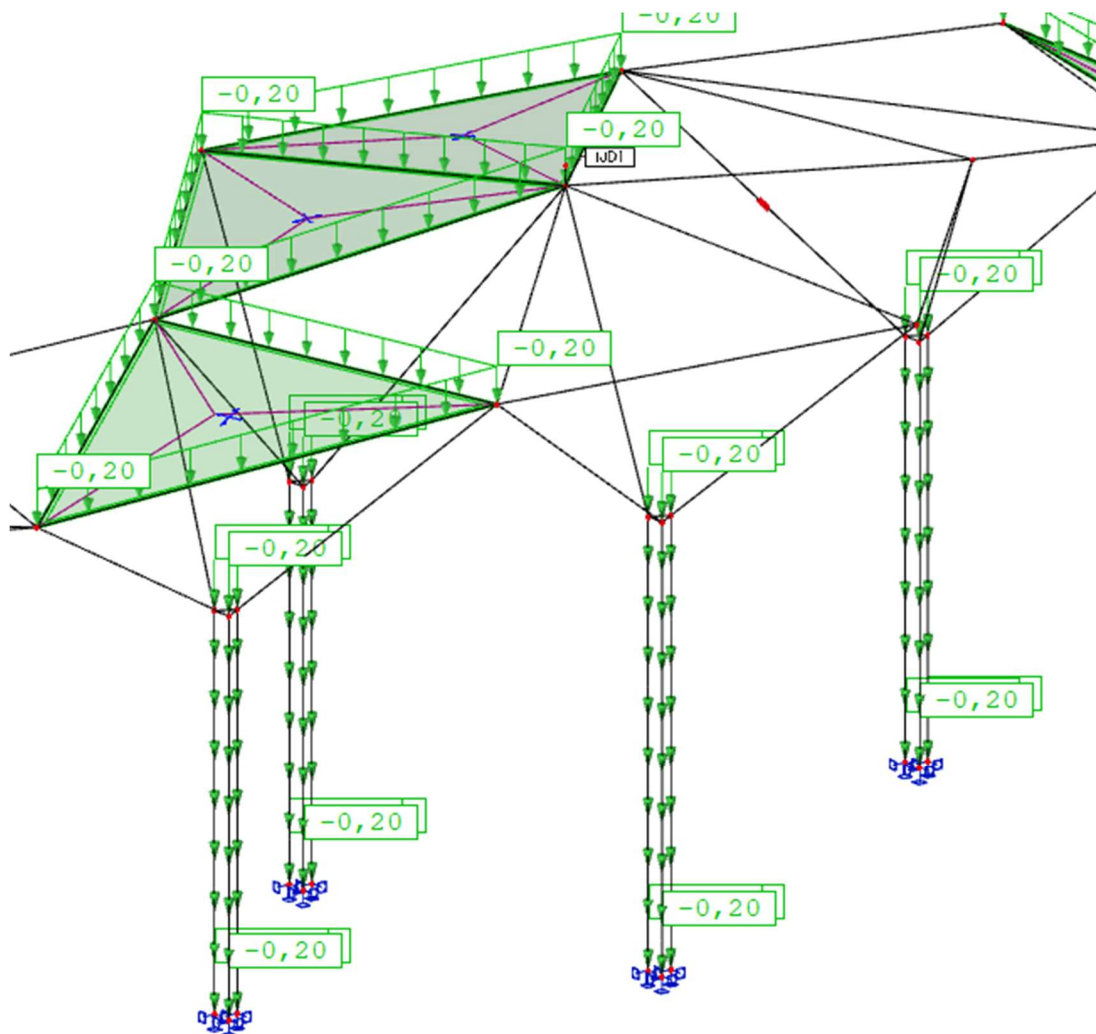

Slika 12: Prikaz dijela konstrukcije opterećenog dodatnim stalnim opterećenjem „dg“ ( $kN/m^2$ -pokrov;  $kN/m'$ -profili)

### 3.2. Opterećenje snijegom

Opterećenje snijegom svrstava se u promjenjivo slobodno opterećenje. Opterećenja snijegom proračunavaju se na osnovi karakterističnog opterećenja  $s_k$ , koje odgovara jednolikom snijegu koji je napadao pri mirnim vremenskim uvjetima na ravno tlo. Ova se vrijednost prilagođava ovisno o obliku krova i utjecaju vjeta na raspodjelu snijega.

Opterećenje snijegom na krovu:

$$s = \mu_i \cdot c_e \cdot c_t \cdot s_k$$

$\mu_i$  – koef. oblika opterećenja snijegom

ravni krov  $0^\circ \leq \alpha \leq 30^\circ$

krov nagiba  $\alpha_1 = \alpha_2 = 0.6^\circ \rightarrow \mu_1 = 0.8$

$s_k$  – karakteristična vrijednost opterećenja na tlu [ $kN/m^2$ ]



Slika 13: Karta područja opterećenja snijegom



Slika 14: Opterećenja snijegom za snježna područja i pripadajuće nadmorske visine

| Nadmorska visina do [m] | 1. područje – priobalje i otoci [kN/m <sup>2</sup> ] | 2. područje – zaleđe Dalmacije, Primorja i Istre [kN/m <sup>2</sup> ] | 3. područje – kontinentalna Hrvatska [kN/m <sup>2</sup> ] | 4. područje – gorska Hrvatska [kN/m <sup>2</sup> ] |
|-------------------------|--|---|---|--|
| 100                     | 0,50   | 0,75  | 1,00  | 1,25   |
| 200                     | 0,50   | 0,75  | 1,25  | 1,50   |
| 300                     | 0,50   | 0,75  | 1,50  | 1,75   |
| 400                     | 0,50   | 1,00  | 1,75  | 2,00   |
| 500                     | 0,50   | 1,25  | 2,00  | 2,50   |
| 600                     | 0,50   | 1,50  | 2,25  | 3,00   |
| 700                     | 0,50   | 2,00  | 2,50  | 3,50   |
| 800                     | 0,50   | 2,50  | 2,75  | 4,00   |
| 900                     | 1,00   | 3,00  | 3,00  | 4,50   |
| 1 000                   | 2,00   | 4,00  | 3,50  | 5,00   |
| 1 100                   | 3,00   | 5,00  | 4,00  | 5,50   |
| 1 200                   | 4,00   | 6,00  | 4,50  | 6,00   |
| 1 300                   | 5,00   | 7,00  |   | 7,00   |
| 1 400                   | 6,00   | 8,00  |   | 8,00   |
| 1 500                   |  | 9,00  |   | 9,00   |
| 1 600                   |  | 10,00   |   | 10,00  |
| 1 700                   |  | 11,00   |   | 11,00  |
| 1 800                   |  | 12,00   |   |  |

Zagreb se nalaze u 3. zoni (očitano sa slike iznad), nadmorska visina do 200 m →  
 $s_k = 1.25 \text{ [kN/m}^2\text{]}$

### PRORAČUN SNIJEGA NA JEDNOSTREŠNI KROV

#### Ulazni parametri:

Područje: 3. područje-kontinentalna Hrvatska

Nadmorska visina do: 200 m.n.m.  $s_k = 1,25 \text{ kN/m}^2$

Nagib jednostrešnog krova:  $\alpha = 0^\circ$

Na objektu postoje snjegobrani/parapeti: NE


$$c_e = 1,0 \quad \mu_1 = 0,80 \quad s = 1,00 \text{ kN/m}^2$$

$$c_t = 1,0 \quad \mu_2 = 0,80 \quad S = \mu_i \cdot c_e \cdot c_t \cdot s_k$$


Proračun snijega na pokrovne elemente:

$$S_{\text{pokrovni element}} = 1,00 \text{ kN/m}^2 \cdot 0,27 \text{ m} = 0,27 \text{ kN/m}'$$



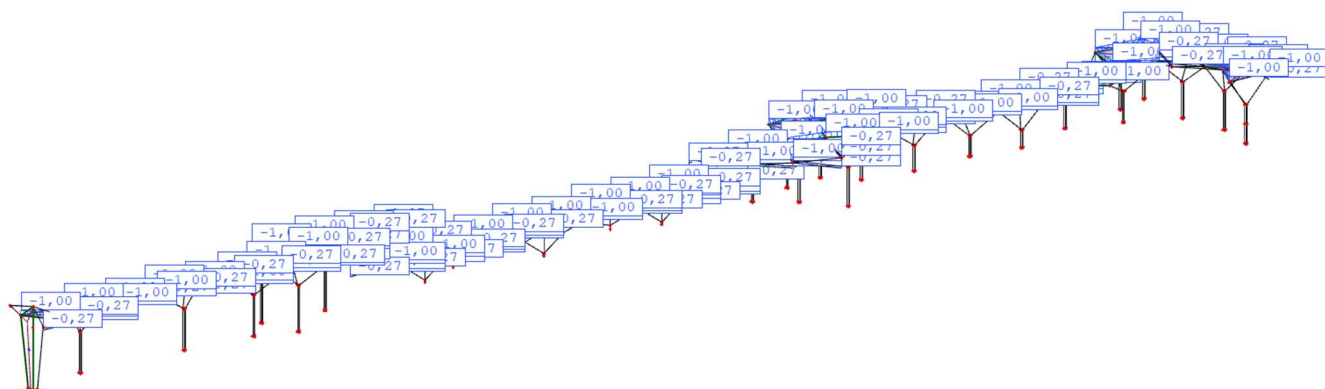


Slika 15: Prikaz opterećenja snijegom na konstrukciju „s“  
( $kN/m^2$ -pokrov;  $Kn/m'$ -profili)

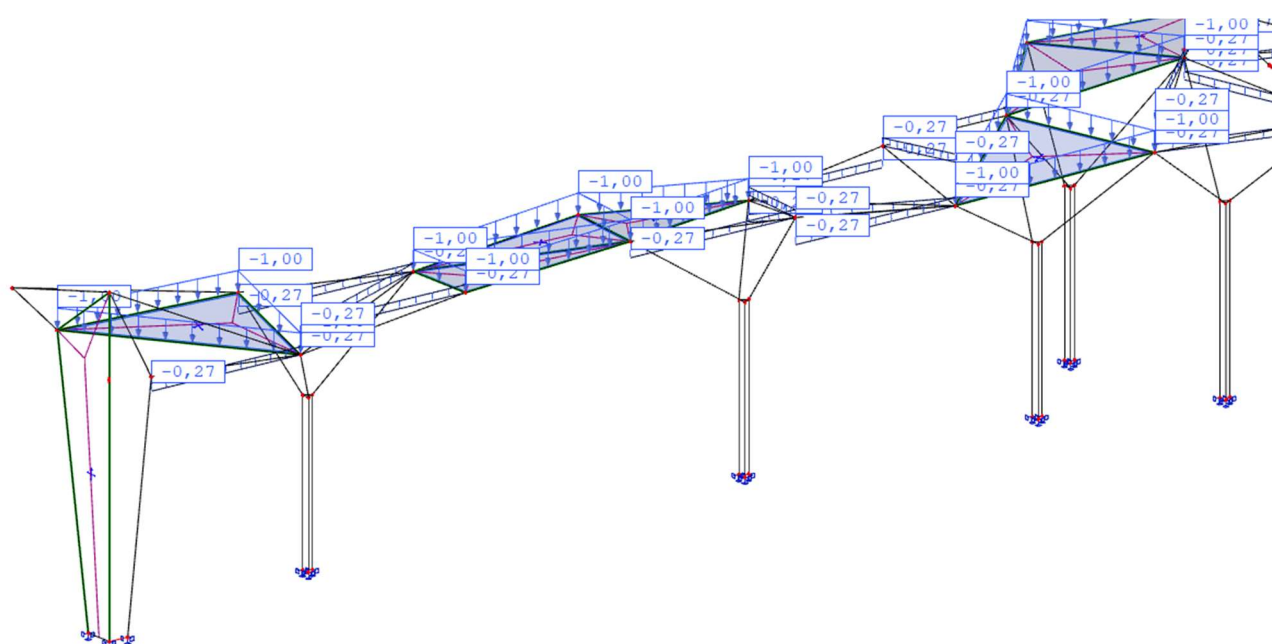

Slika 16: Prikaz opterećenja snijegom na konstrukciju „s“  
( $kN/m^2$ -pokrov;  $Kn/m'$ -profili)

### 3.3. Opterećenje vjetrom

Temeljna vrijednost osnovne brzine vjetra  $v_{b,0}$  određuje se iz karte osnovne brzine vjetra za svaku državu posebno, a koja je sastavni dio Nacionalnog dodatka (kod nas HRN EN 1991-1-4:2012/NA). Karta osnovne brzine vjetra prikazana je na slici ispod.

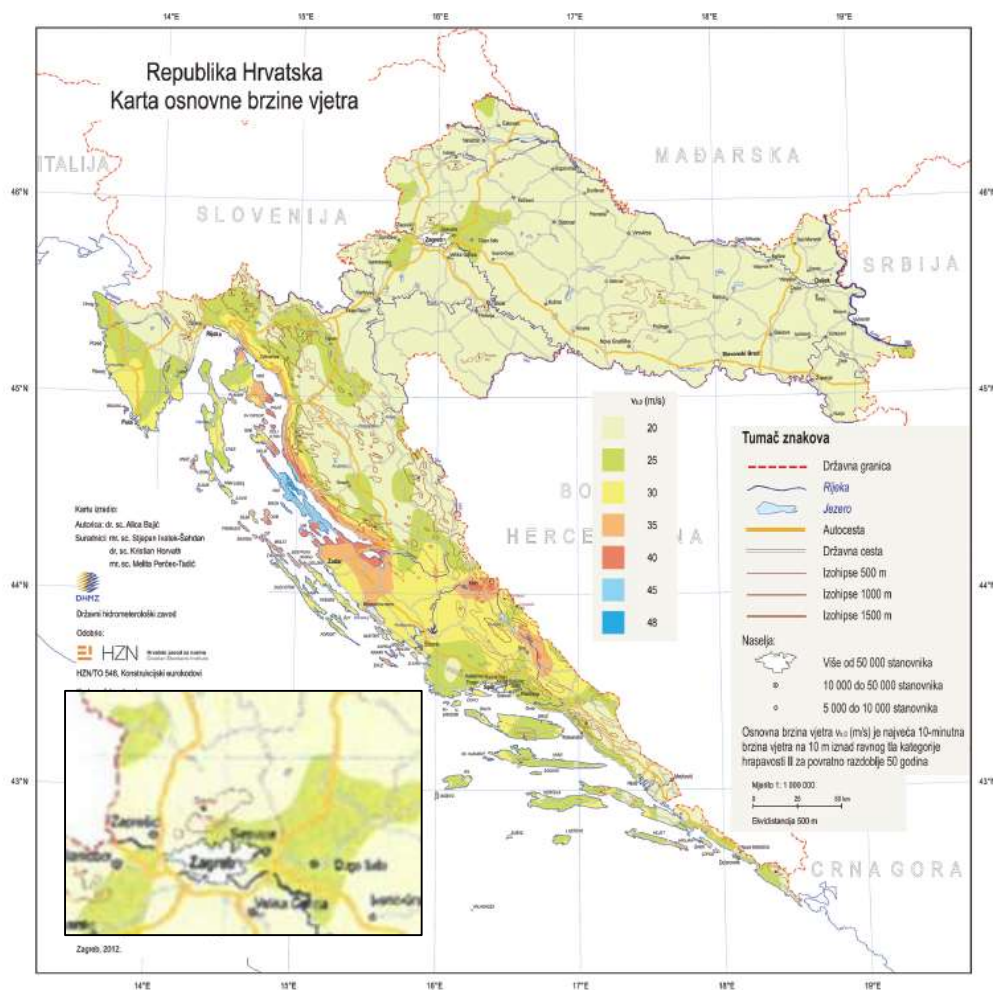

Slika 17: Osnovna brzina vjetra  $v_{b,0}$

Očitano s karte:

$$v_{b,0} = \boxed{25.0 \text{ m/s}} - \text{temeljna vrijednost osnovne brzine vjetra}$$

$v_b$  - osnovna brzina vjetra

$$\rightarrow v_b = c_{dir} \cdot c_{season} \cdot v_{b,0}$$

$c_{dir}$  - faktor smjera vjetra

$$\rightarrow \boxed{1.0} \text{ (preporučena vrijednost)}$$

$c_{season}$  - faktor godišnjeg doba

$$\rightarrow \boxed{1.0} \text{ (preporučena vrijednost)}$$

$$v_b = \boxed{25.0 \text{ m/s}}$$


## Proračun tlaka pri vršnoj brzini

|   |   |   |
|---|---|---|
| $q_p(z)$ - tlak pri vršnoj brzini na visini $z$ | → | $q_p(z) = c_e(z) \cdot q_b$   |
| $c_e(z)$ - faktor izloženosti                   | → | faktor u ovisnosti o kategoriji terena i visini objekta iznad tla                     |
| $q_b$ - tlak pri osnovnoj brzini                | → | $q_b = \frac{1}{2} \rho \cdot v_b^2 = 390,6 \text{ N/m}^2$ (0,391 kN/m <sup>2</sup> ) |
| $\rho$ - gustoća zraka                          | → | 1,25 kg/m <sup>3</sup>  |
| $c_0(z)$ - faktor vertikalne razvedenosti       | → | 1,0 (preporučena vrijednost)  |
| $k_1$ - faktor turbulencije                     | → | 1,0 (preporučena vrijednost)  |

Kategorija terena:  Područja sa stalnim pokrovom od vegetacije ili zgrade ili područja s izoliranim preprekama s razmakom najviše 20 visina prepreke (npr. sela, predgrađa, stalna šuma)

Visina  $z$  iznad terena:

Za kategoriju terena III i visinu iznad terena 14 m za slučaj ravnog terena ( $C_0=1,0$ ) faktor izloženosti terena očitava se sa slike.

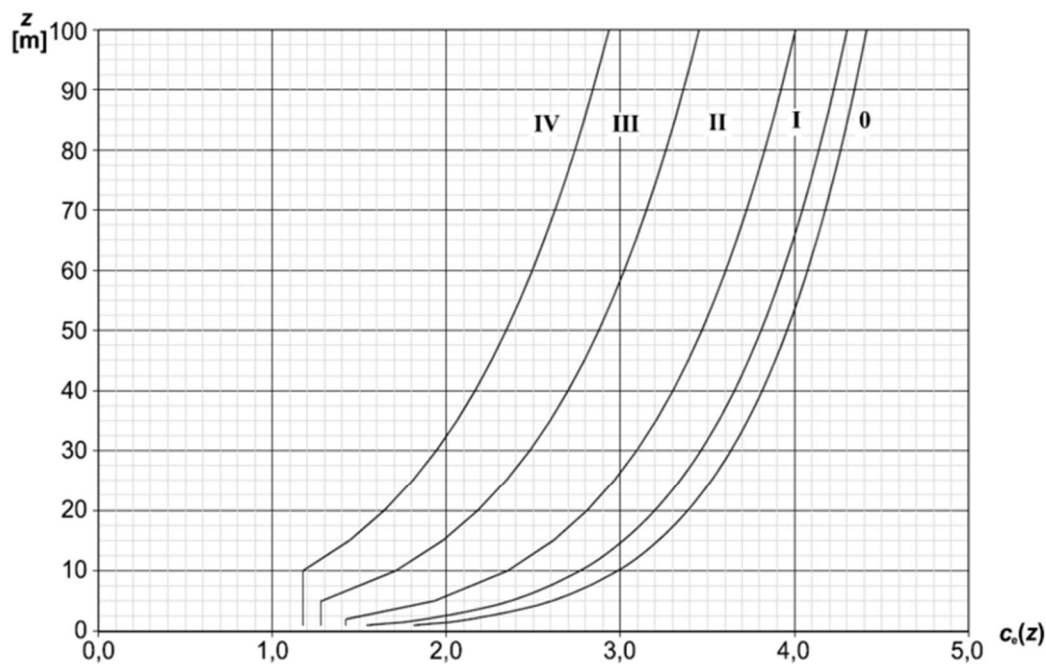

Očitano sa slike:  $c_e(z) =$

$q_p(z)$  - tlak pri vršnoj brzini na visini  $z$  →  $q_p(z) =$   kN/m<sup>2</sup>

## 3. Tlak vjetra na površine

$$w_e - \text{tlak vjetra na vanjske površine} \quad \rightarrow \quad w_e = q_p(z_e) \cdot c_{pe}$$

$$w_i - \text{tlak vjetra na unutarnje površine} \quad \rightarrow \quad w_i = q_p(z_i) \cdot c_{pi}$$


$q_p(z_e), q_p(z_i)$  - tlak pri vršnoj brzini na visini  $z$

$c_e$  - koeficijent tlaka za vanjski tlak

$z_e$  - referentna visina za vanjski tlak

$c_i$  - koeficijent tlaka za unutarnji tlak


$z_i$  - referentna visina za unutarnji tlak

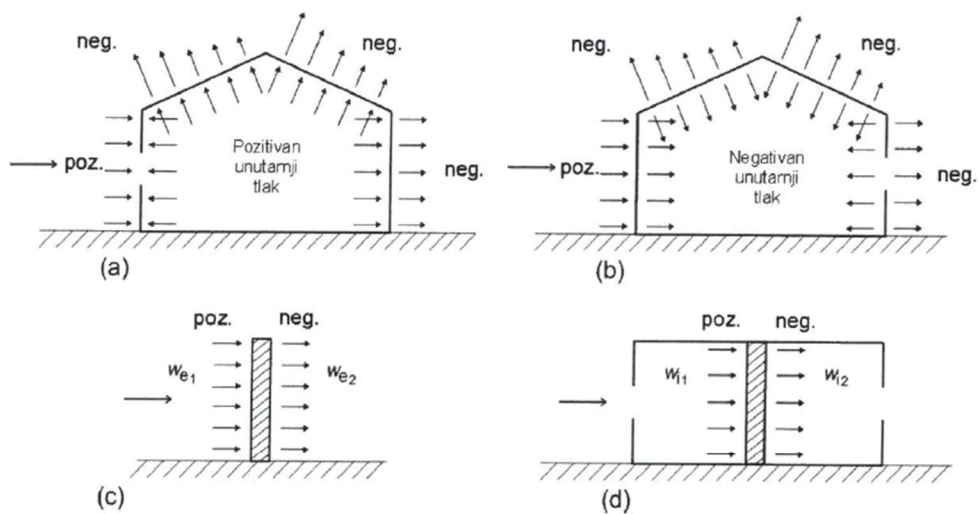


Neto tlak na zid, krov ili element razlika je tlakova na suprotnim površinama uzimajući u obzir njihove predznake. Tlak usmjeren prema površini uzima se kao pozitivan, a usisavanje, usmjereno od površine kao negativno.

### Proračun vjetra za jednostrešnu nadstrešnicu


kut nagiba nadstrešnice-  $\alpha=0^\circ$

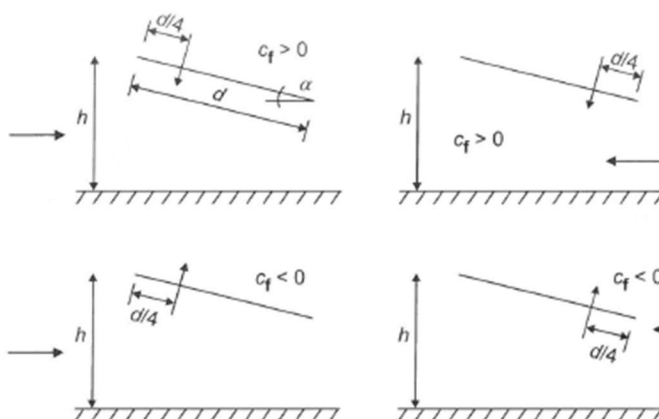

stupanj zapriječenosti (zatvorenosti) ispod krova-  $\varphi=0,5$

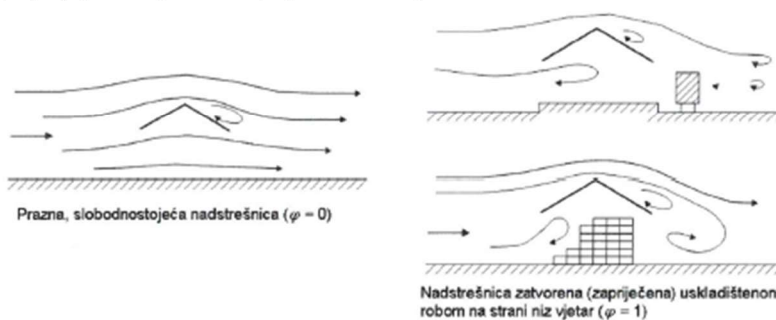

tlocrt

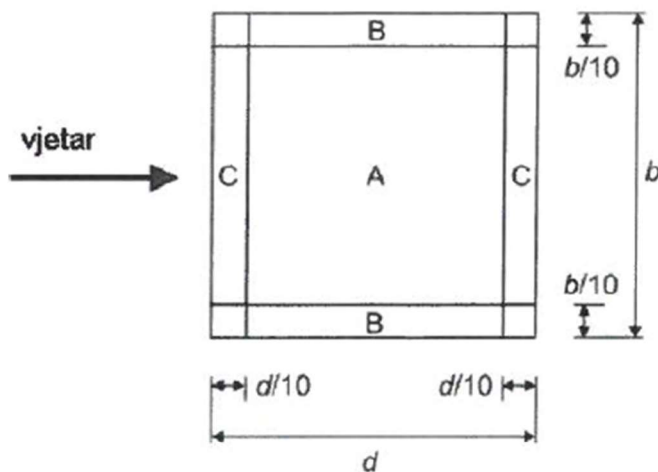

|   |               |
|---|---------------|
| b (duljina u smjeru okomitom na smjer djelovanja vjetra)= | <b>6,0 m</b>  |
| d (duljina u smjeru djelovanja vjetra)=                   | <b>6,0 m</b>  |
| h (visina nadstrešnice prema slici)=                      | <b>14,0 m</b> |

|                             |              |
|-----------------------------|--------------|
| $l_{A,d}$ (duljina zone A)= | <b>4,8 m</b> |
| $l_{B,d}$ (duljina zone B)= | <b>6,0 m</b> |
| $l_{C,d}$ (duljina zone C)= | <b>0,6 m</b> |

|                             |              |
|-----------------------------|--------------|
| $l_{A,b}$ (duljina zone A)= | <b>4,8 m</b> |
| $l_{B,b}$ (duljina zone B)= | <b>0,6 m</b> |
| $l_{C,b}$ (duljina zone C)= | <b>6,0 m</b> |

Oznaka:  $l_{A,b}$  -duljina zone A u smjeru okomitom na smjer vjetra

$l_{A,d}$  -duljina zone A u smjeru vjetra

|  | $C_f$     | A     | B     | C     |       |
|--|-----------|-------|-------|-------|-------|
| <b>najveća vrijednost (svi <math>\varphi</math>) <math>C_{p,net}</math></b>  | 0,20      | 0,50  | 1,80  | 1,10  |       |
|  | <b>0</b>  | -0,90 | -1,05 | -1,55 | -1,80 |
|  | <b>5</b>  | -1,05 | -1,35 | -1,95 | -2,15 |
|  | <b>10</b> | -1,15 | -1,55 | -2,30 | -2,40 |
|  | <b>15</b> | -1,25 | -1,70 | -2,65 | -2,75 |
|  | <b>20</b> | -1,35 | -1,90 | -2,85 | -2,95 |
|  | <b>25</b> | -1,50 | -2,05 | -2,85 | -3,00 |
|  | <b>30</b> | -1,60 | -2,25 | -3,00 | -3,15 |
| <b>najmanja vrijednost (<math>\varphi=0,5</math>) <math>C_{p,net}</math></b> | -0,90     | -1,05 | -1,55 | -1,80 |       |

Tablica vrijednosti koeficijenata vanjskoga tlaka za jednostrešne nadstrešnice

|   | A    | B    | C    |
|---|------|------|------|
| $C_{p,net}$   | 0,50 | 1,80 | 1,10 |
| $q_p(z_e)$  | 0,76 | 0,76 | 0,76 |
| $w_1(kN/m^2)$   | 0,38 | 1,36 | 0,83 |
| Rezultirajuće djelovanje vjetra $W_1$ ( $kN/m^2$ ) na jednostrešnu nadstrešnicu |      |      |      |

|   | A     | B     | C     |
|---|-------|-------|-------|
| $C_{p,net}$   | -1,05 | -1,55 | -1,80 |
| $q_p(z_e)$  | 0,76  | 0,76  | 0,76  |
| $w_1(kN/m^2)$   | -0,79 | -1,17 | -1,36 |
| Rezultirajuće djelovanje vjetra $W_2$ ( $kN/m^2$ ) na jednostrešnu nadstrešnicu |       |       |       |

Kako bi se pojednostavio proračun zona „B“ se usvojila kao mjerodavna za cijeli pokrovni element.

|   |
|---|
| <b>PRORAČUN VJETRA NA KRUŽNI ČELIČNI PROFIL-"TROSTRUKI STUPOVI "S1"</b> |
|---|

**Ulazni parametri:**


$$b = \boxed{0,219} \text{ m}$$

(promjer poprečnog presjeka)

$$l = \boxed{9} \text{ m}$$

$$z_e = \boxed{9} \text{ m}$$

$$A_{ref} = \boxed{1,971} \text{ m}^2$$



$A_{ref}$  – referentna površina djelovanja vjetra

$b$  – promjer kružnog profila

$l$  – duljina elementa

$z_e$  – visina elementa iznad tla

**Kategorija terena:**

|     |
|-----|
| III |
|-----|

(Područja sa stalnim pokrovom od vegetacije ili zgrade ili područja s izoliranim preprekama s razmakom najviše 20 visina prepreke (npr. sela, predgrađa, stalna šuma))

$$z_{min} = \boxed{5,0} \text{ m}$$

$$z_{max} = \boxed{200} \text{ m}$$

$$z_0 = \boxed{0,300} \text{ m}$$

$$z_{0,II} = \boxed{0,05} \text{ m}$$

$$v_{b,0} = \boxed{25} \text{ m/s}$$

$$C_{dir} = \boxed{1,0}$$

$$C_{season} = \boxed{1,0}$$

$$v_b = \boxed{25} \text{ m/s}$$

$v_{b,0}$  – osnovna vrijednost brzine vjetra  
(očitano s karte u normi HRN EN 1991 – 4. NA)

$$v_b = C_{dir} \cdot C_{season} \cdot v_{b,0}$$

**Proračun tlaka vjetra**

$$\rho = \boxed{1,25} \text{ kg/m}^3$$

$$q_b = \boxed{390,6} \text{ N/m}^2$$

$$q_b = \frac{1}{2} \cdot \rho \cdot v_b^2$$

$\rho$  – gustoća zraka

$q_b$  – tlak pri osnovnoj brzini

$q_p(z)$  – tlak pri vršnoj brzini na visini  $z$

$$C_e(z_e) = \boxed{1,641}$$

$$q_p(z) = \boxed{0,641} \text{ kN/m}^2$$

$$q_p(z) = C_e(z) \cdot q_b$$

$$k_r = 0,19 \cdot \left( \frac{z_0}{z_{0,II}} \right)^{0,07}$$

$$v_m(z) = C_r(z) \cdot C_0(z) \cdot v_b$$

$$k_r = \boxed{0,2154}$$

$$C_r(z_e) = \boxed{0,733}$$

$$v_m(z) = \boxed{18,31} \text{ m/s}$$

$$Iv(z) = \frac{\sigma_v}{v_m(z)} = \frac{k_1}{c_0(z) \cdot \ln\left(\frac{z}{z_0}\right)}$$

$$C_0(z_e) = \boxed{1}$$

$$k_1 = \boxed{1}$$

$$I_v(z) = \boxed{0,2940}$$

$$q_p(z_e) = [1 + 7Iv(z)] \cdot \frac{1}{2} \cdot \rho \cdot v_m^2$$

$$q_p(z_e) = \boxed{641,1} \text{ N/m}^2$$

**Reynoldsov broj:**  $Re = \frac{b \cdot v_{(ze)}}{\nu}$

$b$  – promjer kružnog profila

$\nu$  – kinematska viskoznost zraka ( $\nu=15 \times 10^{-6}$  m<sup>2</sup>/s prema HRN EN1991-1-4; 7.9.1(1))

$v_{(ze)}$  – vršna brzina vjetra

$$v_{(ze)} = \left( \frac{2 \cdot q_{p(z_e)}}{\rho} \right)^{0.5}$$

$$v_{(ze)} = \boxed{32,03} \text{ m/s}$$

$$Re = \boxed{4,676E+05}$$

**Proračunska vitkost:**

$$l = \boxed{9,00} \text{ m}$$

**Faktor učinka kraja:**

$$\psi_{\lambda} = \boxed{0,940}$$

Za kružne cilindre gdje je  $l < 15.0$  m:

$$\lambda = \min\left(\frac{l}{b}; 70\right)$$

$$\lambda = \boxed{41,096}$$

**Koeficijent sile:**

$$c_f = c_{f,0} \cdot \psi_{\lambda}$$

$c_{f,0}$  – koeficijent sile za valjke bez toka preko slobodnog kraja

$\psi_{\lambda}$  – faktor učinka kraja

$$c_{f,0} = c_{f,0} \cdot \psi_r \cdot \psi_{\lambda}$$

$$C_{f,0} = \boxed{0,760}$$

$$C_f = \boxed{0,714}$$

**Ukupna sila vjetra:**

$$F_w = c_s c_d \cdot c_f \cdot q_p(z_e) \cdot A_{ref}$$

$A_{ref}$  – referentna površina konstrukcije

$F_w$  – ukupna sila vjetra na konstrukciju

$c_s c_d$  – konstrukcijski faktor

$$A_{ref} = \boxed{1,971} \text{ m}^2 \quad A_{ref} = b \cdot l$$

$$C_s C_d = \boxed{1}$$

$$F_w = \boxed{0,903} \text{ kN}$$

$$w_{eff} = \frac{F_w}{A_{ref}}$$

$$w_{eff} = \boxed{0,458} \text{ kN/m}^2$$

$$w_e = w_{eff} \cdot b$$

$$w_e = \boxed{0,100} \text{ kN/m}$$



## PRORAČUN VJETRA NA KRUŽNI ČELIČNI PROFIL-STUPOVI "S3" I POKROV NISKOJ DIJELI NADSTREŠNICE

### Ulazni parametri:


$$b = \boxed{0,3556} \text{ m}$$

(promjer poprečnog presjeka)

$$l = \boxed{5,5} \text{ m}$$

$$z_e = \boxed{5,5} \text{ m}$$

$$A_{\text{ref}} = \boxed{1,9558} \text{ m}^2$$



$A_{\text{ref}}$  – referentna površina djelovanja vjetra

$b$  – promjer kružnog profila

$l$  – duljina elementa

$z_e$  – visina elementa iznad tla

### Kategorija terena:

(Područja sa stalnim pokrovom od vegetacije ili zgrade ili područja s izoliranim preprekama s razmakom najviše 20 visina prepreke (npr. sela, predgrađa, stalna šuma))

$$z_{\text{min}} = \boxed{5,0} \text{ m}$$

$$z_{\text{max}} = \boxed{200} \text{ m}$$

$$z_0 = \boxed{0,300} \text{ m}$$

$$z_{0,II} = \boxed{0,05} \text{ m}$$

$$v_{b,0} = \boxed{25} \text{ m/s}$$

$$C_{\text{dir}} = \boxed{1,0}$$

$$C_{\text{season}} = \boxed{1,0}$$

$$v_b = \boxed{25} \text{ m/s}$$

$v_{b,0}$  – osnovna vrijednost brzine vjetra  
(očitano s karte u normi HRN EN 1991 – 4. NA)

$$v_b = C_{\text{dir}} \cdot C_{\text{season}} \cdot v_{b,0}$$

### Proračun tlaka vjetra

$$\rho = \boxed{1,25} \text{ kg/m}^3$$

$$q_b = \boxed{390,6} \text{ N/m}^2$$

$$q_b = \frac{1}{2} \cdot \rho \cdot v_b^2$$

$\rho$  – gustoća zraka

$q_b$  – tlak pri osnovnoj brzini

$q_p(z)$  – tlak pri vršnoj brzini na visini  $z$

$$C_e(z_e) = \boxed{1,337}$$

$$q_p(z) = \boxed{0,522} \text{ kN/m}^2$$

$$q_p(z) = C_e(z) \cdot q_b$$

$$k_r = 0,19 \cdot \left( \frac{z_0}{z_{0,II}} \right)^{0,07}$$

$$v_m(z) = C_r(z) \cdot C_0(z) \cdot v_b$$

$$k_r = \boxed{0,2154}$$

$$C_r(z_e) = \boxed{0,627}$$

$$v_m(z) = \boxed{15,66} \text{ m/s}$$

$$I_v(z) = \frac{\sigma_v}{v_m(z)} = \frac{k_1}{c_0(z) \cdot \ln\left(\frac{z}{z_0}\right)}$$

$$C_0(z_e) = \boxed{1}$$

$$k_1 = \boxed{1}$$

$$I_v(z) = \boxed{0,3438}$$

$$q_p(z_e) = [1 + 7I_v(z)] \cdot \frac{1}{2} \cdot \rho \cdot v_m^2$$

$$q_p(z_e) = \boxed{522,3} \text{ N/m}^2$$

**Reynoldsov broj:**  $Re = \frac{b \cdot v_{(ze)}}{\nu}$

$b$  – promjer kružnog profila

$\nu$  – kinematska viskoznost zraka ( $\nu=15 \times 10^{-6}$  m<sup>2</sup>/s prema HRN EN1991-1-4; 7.9.1(1))

$v_{(ze)}$  – vršna brzina vjetra

$$v_{(ze)} = \left( \frac{2 \cdot q_{p(z_e)}}{\rho} \right)^{0.5}$$

$$v_{(ze)} = \boxed{28,91} \text{ m/s}$$

$$Re = \boxed{6,853E+05}$$

**Proračunska vitkost:**

$$l = \boxed{5,50} \text{ m}$$

**Faktor učinka kraja:**

$$\psi_{\lambda} = \boxed{0,920}$$

Za kružne cilindre gdje je  $l < 15.0$  m:

$$\lambda = \min\left(\frac{l}{b}; 70\right)$$

$$\lambda = \boxed{15,467}$$

**Koeficijent sile:**

$$c_f = c_{f,0} \cdot \psi_{\lambda}$$

$c_{f,0}$  – koeficijent sile za valjke bez toka preko slobodnog kraja

$\psi_{\lambda}$  – faktor učinka kraja

$$c_{f,0} = c_{f,0} \cdot \psi_r \cdot \psi_{\lambda}$$

$$C_{f,0} = \boxed{0,480}$$

$$C_f = \boxed{0,442}$$

**Ukupna sila vjetra:**

$$F_w = c_s c_d \cdot c_f \cdot q_p(z_e) \cdot A_{ref}$$

$A_{ref}$  – referentna površina konstrukcije

$F_w$  – ukupna sila vjetra na konstrukciju

$c_s c_d$  – konstrukcijski faktor

$$A_{ref} = \boxed{1,9558} \text{ m}^2 \quad A_{ref} = b \cdot l$$

$$C_s C_d = \boxed{1}$$

$$F_w = \boxed{0,451} \text{ kN}$$

$$w_{eff} = \frac{F_w}{A_{ref}}$$

$$w_{eff} = \boxed{0,231} \text{ kN/m}^2$$

$$w_e = w_{eff} \cdot b$$

$$w_e = \boxed{0,082} \text{ kN/m'}$$

|   |
|---|
| <b>PRORAČUN VJETRA NA KRUŽNI ČELIČNI PROFIL- POKROV VIŠEG DIJELA NADSTREŠNICE</b> |
|---|

**Ulazni parametri:**


$$b = \boxed{0,273} \text{ m}$$

(promjer poprečnog presjeka)

$$l = \boxed{5} \text{ m}$$

$$z_e = \boxed{14} \text{ m}$$

$$A_{ref} = \boxed{1,365} \text{ m}^2$$



$A_{ref}$  – referentna površina djelovanja vjetra

$b$  – promjer kružnog profila

$l$  – duljina elementa

$z_e$  – visina elementa iznad tla

**Kategorija terena:**

|     |
|-----|
| III |
|-----|

(Područja sa stalnim pokrovom od vegetacije ili zgrade ili područja s izoliranim preprekama s razmakom najviše 20 visina prepreke (npr. sela, predgrađa, stalna šuma))

$$z_{min} = \boxed{5,0} \text{ m}$$

$$z_{max} = \boxed{200} \text{ m}$$

$$z_0 = \boxed{0,300} \text{ m}$$

$$z_{0,II} = \boxed{0,05} \text{ m}$$

$$v_{b,0} = \boxed{25} \text{ m/s}$$

$$C_{dir} = \boxed{1,0}$$

$$C_{season} = \boxed{1,0}$$

$$v_b = \boxed{25} \text{ m/s}$$

$v_{b,0}$  – osnovna vrijednost brzine vjetra  
(očitano s karte u normi HRN EN 1991 – 4. NA)

$$v_b = C_{dir} \cdot C_{season} \cdot v_{b,0}$$

**Proračun tlaka vjetra**

$$\rho = \boxed{1,25} \text{ kg/m}^3$$

$$q_b = \boxed{390,6} \text{ N/m}^2$$

$$q_b = \frac{1}{2} \cdot \rho \cdot v_b^2$$

$\rho$  – gustoća zraka

$q_b$  – tlak pri osnovnoj brzini

$q_p(z)$  – tlak pri vršnoj brzini na visini  $z$

$$C_e(z_e) = \boxed{1,933}$$

$$q_p(z) = \boxed{0,755} \text{ kN/m}^2$$

$$q_p(z) = C_e(z) \cdot q_b$$

$$k_r = 0,19 \cdot \left( \frac{z_0}{z_{0,II}} \right)^{0,07}$$

$$v_m(z) = C_r(z) \cdot C_0(z) \cdot v_b$$

$$k_r = \boxed{0,2154}$$

$$C_r(z_e) = \boxed{0,828}$$

$$v_m(z) = \boxed{20,69} \text{ m/s}$$

$$Iv(z) = \frac{\sigma_v}{v_m(z)} = \frac{k_1}{c_0(z) \cdot \ln\left(\frac{z}{z_0}\right)}$$

$$C_0(z_e) = \boxed{1}$$

$$k_1 = \boxed{1}$$

$$I_v(z) = \boxed{0,2602}$$

$$q_p(z_e) = [1 + 7Iv(z)] \cdot \frac{1}{2} \cdot \rho \cdot v_m^2$$

$$q_p(z_e) = \boxed{755,1} \text{ N/m}^2$$

**Reynoldsov broj:**  $Re = \frac{b \cdot v_{(ze)}}{\nu}$

$b$  – promjer kružnog profila

$\nu$  – kinematska viskoznost zraka ( $\nu=15 \times 10^{-6}$  m<sup>2</sup>/s prema HRN EN1991-1-4; 7.9.1(1))

$v_{(ze)}$  – vršna brzina vjetra

$$v_{(ze)} = \left( \frac{2 \cdot q_{p(z_e)}}{\rho} \right)^{0.5}$$

$$v_{(ze)} = \boxed{34,76} \text{ m/s}$$

$$Re = \boxed{6,326E+05}$$

**Proračunska vitkost:**

$$l = \boxed{5,00} \text{ m}$$

**Faktor učinka kraja:**

$$\psi_{\lambda} = \boxed{0,930}$$

Za kružne cilindre gdje je  $l < 15.0$  m:

$$\lambda = \min\left(\frac{l}{b}; 70\right)$$

$$\lambda = \boxed{18,315}$$

**Koeficijent sile:**

$$c_f = c_{f,0} \cdot \psi_{\lambda}$$

$c_{f,0}$  – koeficijent sile za valjke bez toka preko slobodnog kraja

$\psi_{\lambda}$  – faktor učinka kraja

$$c_{f,0} = c_{f,0} \cdot \psi_r \cdot \psi_{\lambda}$$

$$C_{f,0} = \boxed{0,630}$$

$$C_f = \boxed{0,586}$$

**Ukupna sila vjetra:**

$$F_w = c_s c_d \cdot c_f \cdot q_p(z_e) \cdot A_{ref}$$

$A_{ref}$  – referentna površina konstrukcije

$F_w$  – ukupna sila vjetra na konstrukciju

$c_s c_d$  – konstrukcijski faktor

$$A_{ref} = \boxed{1,365} \text{ m}^2 \quad A_{ref} = b \cdot l$$

$$C_s C_d = \boxed{1}$$


$$F_w = \boxed{0,604} \text{ kN}$$

$$w_{eff} = \frac{F_w}{A_{ref}}$$


$$w_{eff} = \boxed{0,442} \text{ kN/m}^2$$

$$w_e = w_{eff} \cdot b$$


$$w_e = \boxed{0,121} \text{ kN/m'}$$

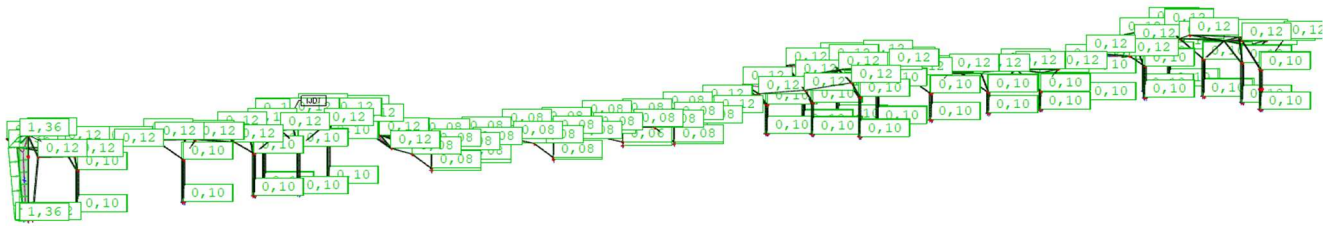


Slika 18: Opterećenje vjetra na profile „w“ smjer x (kN/m')

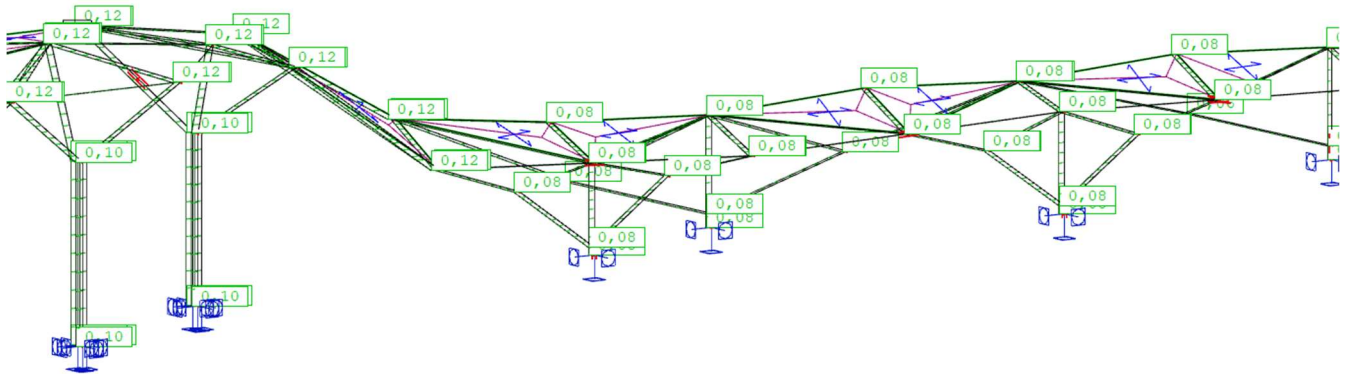


Slika 19: Prikaz dijela konstrukcije opterećenog vjetrom „w“ u smjeru x (kN/m')

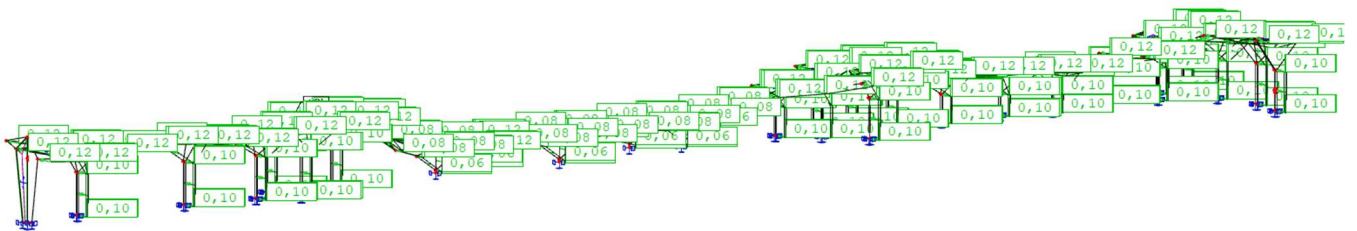


Slika 20: Opterećenje vjetra na profile „w“ smjer y (kN/m')

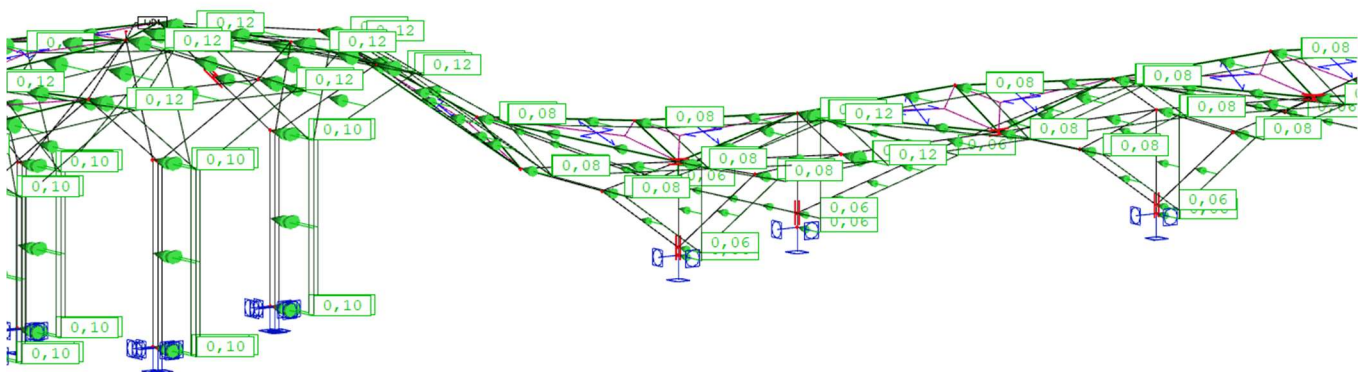


Slika 21: Prikaz dijela konstrukcije opterećenog vjetrom „w“ u smjeru y (kN/m')

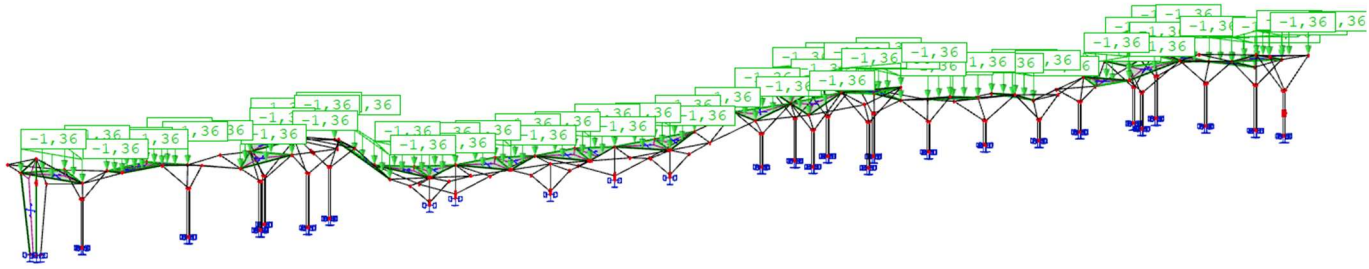


Slika 22: Opterećenje vjetra „w“ na pokrov -pritisak (kN/m<sup>2</sup>)

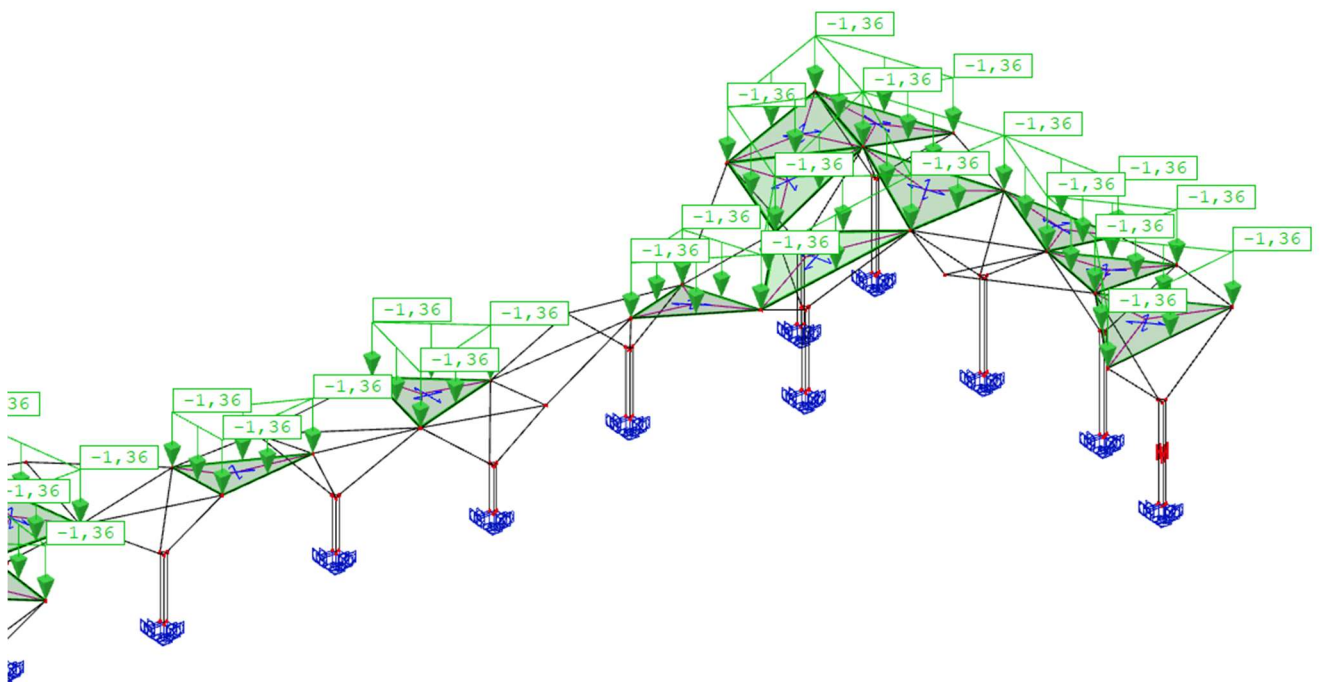

Slika 23: Prikaz dijela konstrukcije opterećenog pritiskajućim vjetrom „w“ (kN/m')

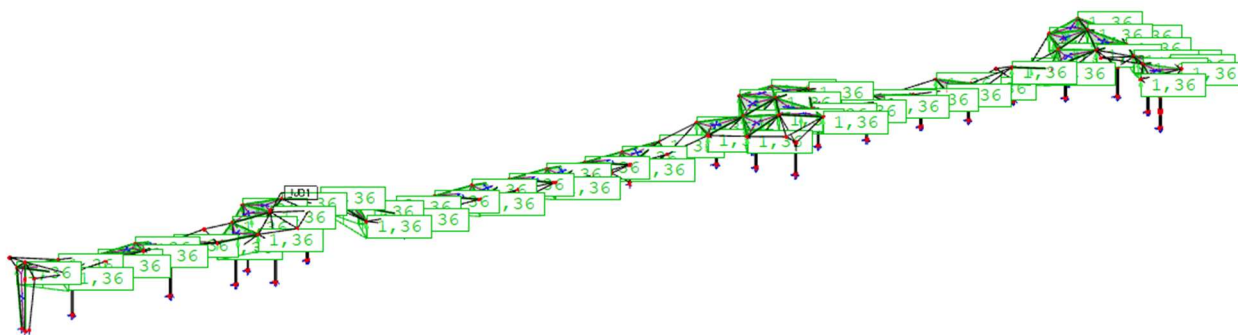


Slika 24: Opterećenje vjetra "w" na pokrov -odizanje (kN/m<sup>2</sup>)

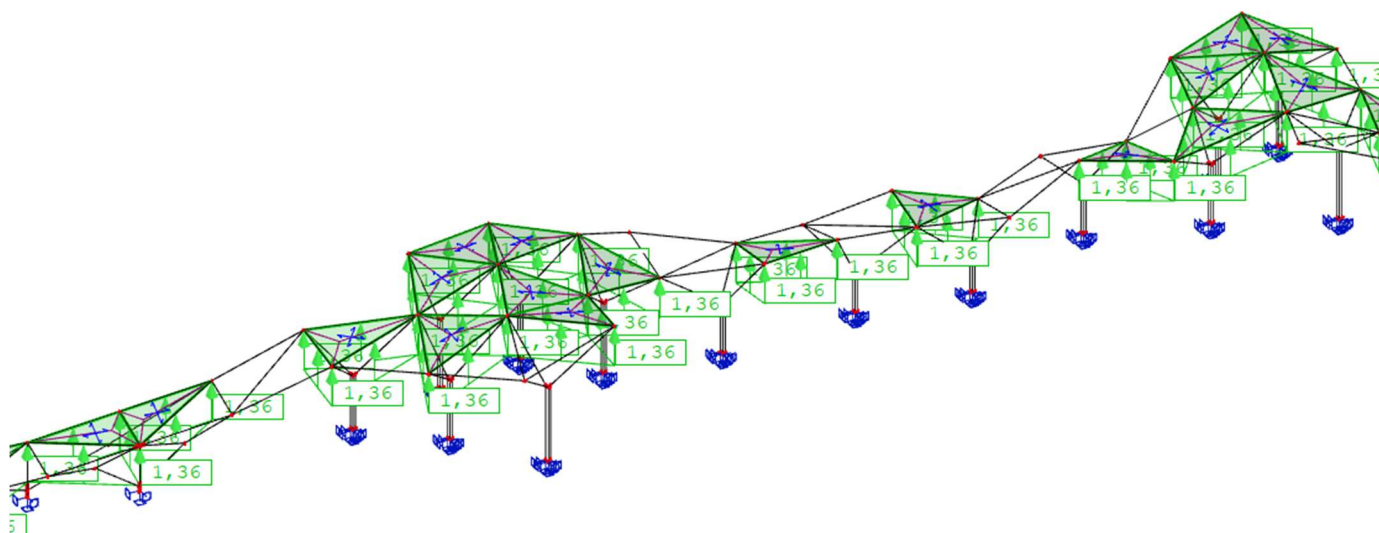

Slika 25: Prikaz dijela konstrukcije opterećenog odizućim vjetrom „w“ (kN/m')



### 3.4. Opterećenje temperaturom

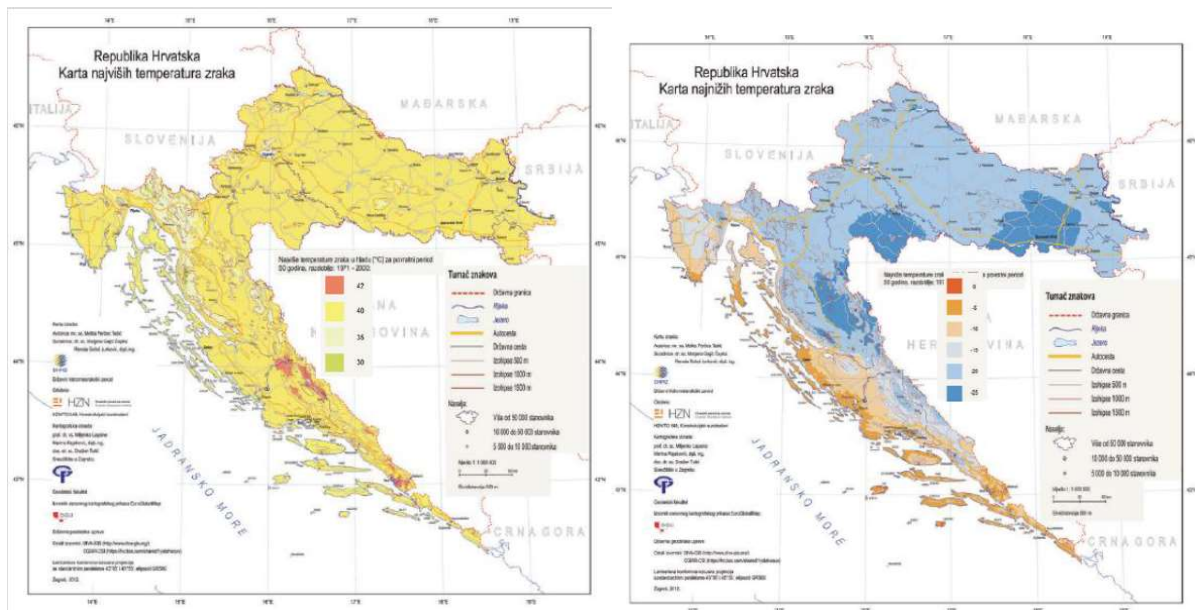

Slika 26: Karta područja opterećenja temperaturom  $T_{max}$  i  $T_{min}$

Promatrani objekt nalazi se na području Zagreba do 200 m nadmorske visine:

Najviša temperatura u hladu:  $T_{max} = 40\text{ }^{\circ}\text{C}$


Najniža temperatura u hladu:  $T_{min} = -20\text{ }^{\circ}\text{C}$

Pretpostavlja se djelovanje jednolike temperature promjene u svim presjecima.


Pretpostavljena temperatura pri montaži konstrukcije  $T = 10\text{ }^{\circ}\text{C}$

- 1) Maksimalna pozitivna temperaturna promjena:  $T_{max} = 40\text{ }^{\circ}\text{C} - 10\text{ }^{\circ}\text{C} = 30\text{ }^{\circ}\text{C}$
- 2) Maksimalna negativna temperaturna promjena:  $T_{min} = -20\text{ }^{\circ}\text{C} - 10\text{ }^{\circ}\text{C} = -30\text{ }^{\circ}\text{C}$



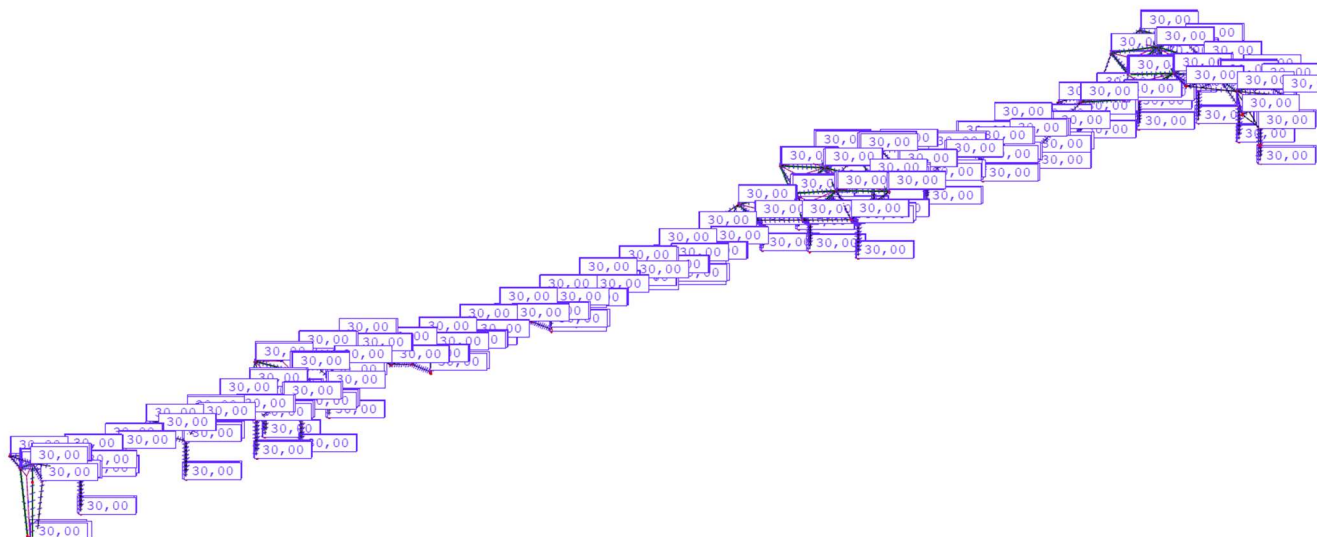

Slika 27: Prikaz temperaturnog opterećenja „T+“ zagrijavanja konstrukcije

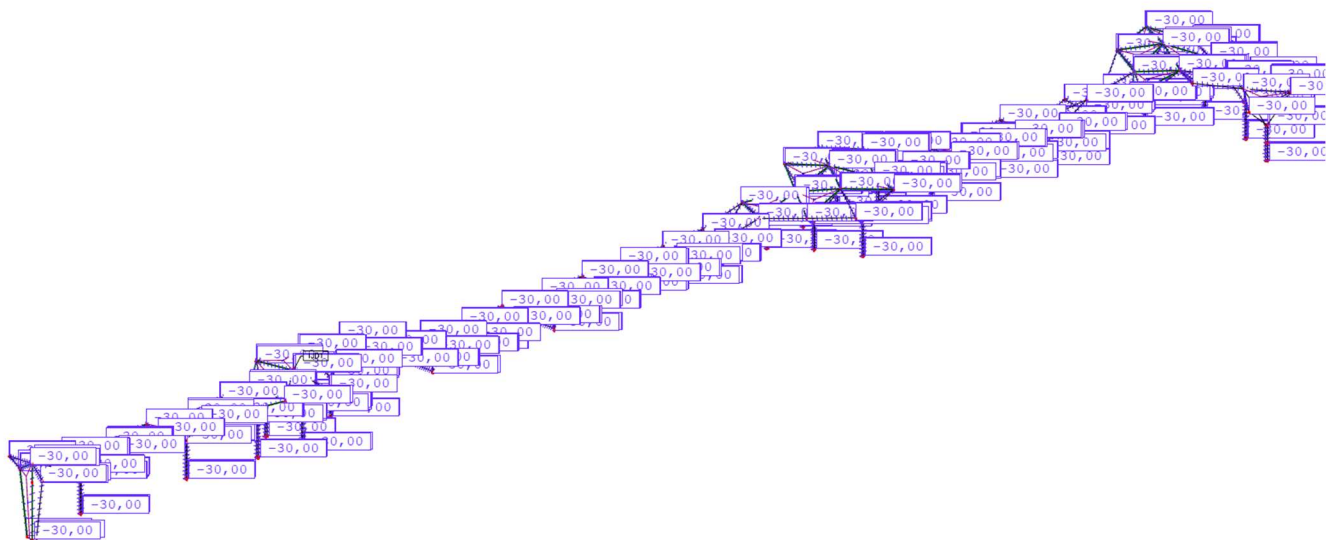


Slika 28: Prikaz temperaturnog opterećenja „T-“, hlađenja konstrukcije

### 3.5. Modalna analiza

Potresne sile proračunate su metodom višemodalne (spektralne) analize prema EC-8 pomoću računalnog programa Scia Engineer 22.0.

Predmetna lokacija (Zagreb) se nalazi u potresnoj zoni za koju je definirano poredbeno vršno ubrzanje temeljnog tla  $a_{gR}=0,252$  g za povratni period  $T=475$  god, odnosno  $a_{gR}=0,13$  g za povratni period  $T=95$  god.

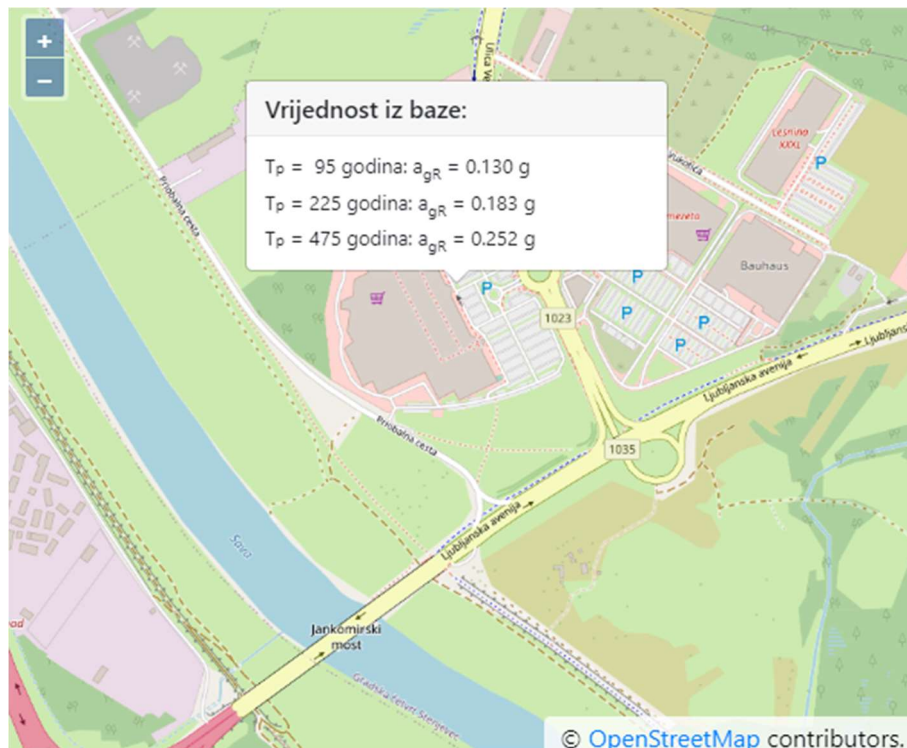

Slika 29: Prikaz vršnog ubrzanja temeljnog tla za povratni period  $T=475$  god i  $T=95$  god

Građevina je temeljena na temeljnom tlu klase C. Pretpostavlja se srednja klasa (DCM) duktilnog ponašanja građevine.

**Faktor ponašanja**

Razina duktilnosti: DCM (srednja razina)

**PRORAČUN FAKTORA PONAŠANJA**

|                                 |                 |
|---------------------------------|-----------------|
| Kriterij tlocrtno pravilnosti:  | Nije zadovoljen |
| Kriterij pravilnosti po visini: | Nije zadovoljen |
| Klasa duktilnosti:              | DCM             |

$$q = q_0 \cdot k_w \geq 1.5$$


$q$  – gornja granična vrijednost faktora ponašanja

$q_0$  – osnovna vrijednost faktora ponašanja

$k_w$  – faktor kojim se uzima u obzir prevladavajući oblik sloma

|                   |                         |
|-------------------|-------------------------|
| Tip konstrukcije: | Sustav obrnutog njihala |
|-------------------|-------------------------|

|         |            |                              |
|---------|------------|------------------------------|
| $q_0 =$ | 1,2        | (vrijednost smanjena za 20%) |
| $k_w =$ | 1          |                              |
| $q =$   | <b>1,2</b> |                              |
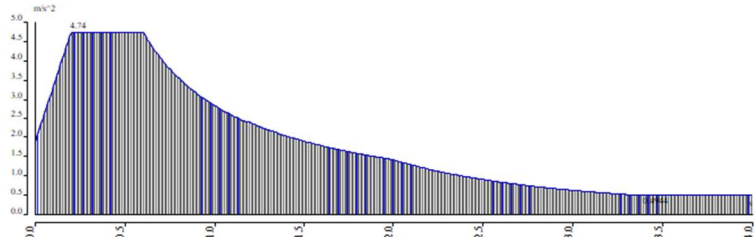
|                    |  |
|--------------------|--|
| Naziv spektra      | S  |
| Tip prikaza        | Period   |
| Informacije        | Tip koda - Eurocode<br>Tip tla - A<br>Smjer- Horizontalni<br>Tip spektra - Tip 1<br>Koeficijent ubrzanja – 0,252<br>$a_g$ – proračunsko ubrzanje – 2,472<br>beta – 0,2<br>$q$ – faktor ponašanja – 1,2 |
| Elastični spektar: |    |

Slika 30: Prikaz elastičnog spektra za seizmički proračun

## Proračun

## Općenito

|                            |                 |
|----------------------------|-----------------|
| Number of 2D elements      | 0               |
| Number of 1D elements      | 3678            |
| Number of mesh nodes       | 3509            |
| Number of equations        | 21054           |
| Combination of mass groups | MC1 CM1         |
| Modification group         | None            |
| Number of frequencies      | 400             |
| Method                     | Lanczos         |
| Bending theory             | Mindlin         |
| Type of analysis model     | Standard        |
| Start of calculation       | 9.6.2023. 13:18 |
| End of calculation         | 9.6.2023. 13:20 |

## Suma masa

|   | Mass type   | X<br>[kg] | Y<br>[kg] | Z<br>[kg] |
|---|-------------|-----------|-----------|-----------|
| 1 | Moving mass | 169034,68 | 169034,68 | 169034,68 |
| 1 | Total mass  | 170995,17 | 170995,17 | 170995,17 |

## Relativna modalna masa

| Mode | Omega<br>[rad/s] | Period<br>[s] | Freq.<br>[Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|------------------|---------------|---------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 1    | 6.68364          | 0,94          | 1,06          | 0,0005            | 0,0966            | 0,0000            | 0,0227                  | 0,0001                  | 0,2667                  |
| 2    | 9.35285          | 0,67          | 1,49          | 0,0535            | 0,0005            | 0,0008            | 0,0026                  | 0,0002                  | 0,0278                  |
| 3    | 9.43292          | 0,67          | 1,50          | 0,0052            | 0,1387            | 0,0003            | 0,0156                  | 0,0004                  | 0,1641                  |
| 4    | 11.6098          | 0,54          | 1,85          | 0,0001            | 0,0025            | 0,0006            | 0,0007                  | 0,0008                  | 0,0086                  |
| 5    | 12.366           | 0,51          | 1,97          | 0,0061            | 0,3043            | 0,0007            | 0,0115                  | 0,0003                  | 0,3400                  |
| 6    | 13.598           | 0,46          | 2,16          | 0,0022            | 0,2091            | 0,0014            | 0,0042                  | 0,0001                  | 0,0027                  |
| 7    | 15.1232          | 0,42          | 2,41          | 0,1288            | 0,0327            | 0,0016            | 0,0025                  | 0,0055                  | 0,0116                  |
| 8    | 15.9281          | 0,39          | 2,54          | 0,0265            | 0,0401            | 0,0001            | 0,0055                  | 0,0026                  | 0,0079                  |
| 9    | 17.206           | 0,37          | 2,74          | 0,0160            | 0,0020            | 0,0135            | 0,0006                  | 0,0000                  | 0,0037                  |
| 10   | 18.0089          | 0,35          | 2,87          | 0,0052            | 0,0038            | 0,0023            | 0,0016                  | 0,0119                  | 0,0022                  |
| 11   | 18.2387          | 0,34          | 2,90          | 0,0308            | 0,0000            | 0,0019            | 0,0066                  | 0,0022                  | 0,0004                  |
| 12   | 19.4036          | 0,32          | 3,09          | 0,0301            | 0,0000            | 0,0002            | 0,0000                  | 0,0030                  | 0,0047                  |
| 13   | 20.3888          | 0,31          | 3,24          | 0,0836            | 0,0026            | 0,0010            | 0,0002                  | 0,0008                  | 0,0019                  |
| 14   | 21.3371          | 0,29          | 3,40          | 0,0055            | 0,0063            | 0,0030            | 0,0009                  | 0,0065                  | 0,0030                  |
| 15   | 22.1231          | 0,28          | 3,52          | 0,0102            | 0,0006            | 0,0003            | 0,0011                  | 0,0002                  | 0,0004                  |
| 16   | 23.0875          | 0,27          | 3,67          | 0,0351            | 0,0024            | 0,0001            | 0,0043                  | 0,0001                  | 0,0038                  |
| 17   | 23.6275          | 0,27          | 3,76          | 0,0155            | 0,0041            | 0,0010            | 0,0091                  | 0,0011                  | 0,0019                  |
| 18   | 24.6642          | 0,25          | 3,93          | 0,0105            | 0,0039            | 0,0114            | 0,0109                  | 0,0013                  | 0,0000                  |
| 19   | 25.496           | 0,25          | 4,06          | 0,0067            | 0,0002            | 0,0003            | 0,0001                  | 0,0000                  | 0,0005                  |
| 20   | 25.9243          | 0,24          | 4,13          | 0,0097            | 0,0005            | 0,0028            | 0,0019                  | 0,0001                  | 0,0000                  |
| 21   | 26.9464          | 0,23          | 4,29          | 0,0000            | 0,0034            | 0,0088            | 0,0121                  | 0,0033                  | 0,0008                  |
| 22   | 27.3545          | 0,23          | 4,35          | 0,0005            | 0,0001            | 0,0003            | 0,0001                  | 0,0001                  | 0,0040                  |
| 23   | 27.522           | 0,23          | 4,38          | 0,0001            | 0,0026            | 0,0000            | 0,0027                  | 0,0013                  | 0,0011                  |
| 24   | 28.038           | 0,22          | 4,46          | 0,0358            | 0,0002            | 0,0049            | 0,0009                  | 0,0016                  | 0,0000                  |
| 25   | 28.9074          | 0,22          | 4,60          | 0,0272            | 0,0002            | 0,0001            | 0,0007                  | 0,0016                  | 0,0003                  |
| 26   | 29.3866          | 0,21          | 4,68          | 0,0038            | 0,0006            | 0,0016            | 0,0028                  | 0,0019                  | 0,0002                  |
| 27   | 30.1515          | 0,21          | 4,80          | 0,0014            | 0,0005            | 0,0003            | 0,0013                  | 0,0017                  | 0,0005                  |
| 28   | 30.5025          | 0,21          | 4,85          | 0,0332            | 0,0008            | 0,0003            | 0,0007                  | 0,0002                  | 0,0011                  |
| 29   | 30.9422          | 0,20          | 4,92          | 0,0099            | 0,0000            | 0,0002            | 0,0004                  | 0,0000                  | 0,0002                  |
| 30   | 31.4485          | 0,20          | 5,01          | 0,0048            | 0,0000            | 0,0001            | 0,0001                  | 0,0001                  | 0,0000                  |
| 31   | 32.0437          | 0,20          | 5,10          | 0,0002            | 0,0000            | 0,0013            | 0,0000                  | 0,0035                  | 0,0001                  |
| 32   | 33.2866          | 0,19          | 5,30          | 0,0025            | 0,0019            | 0,0031            | 0,0067                  | 0,0001                  | 0,0001                  |
| 33   | 33.4582          | 0,19          | 5,33          | 0,0011            | 0,0011            | 0,0007            | 0,0020                  | 0,0006                  | 0,0054                  |
| 34   | 33.8261          | 0,19          | 5,38          | 0,0036            | 0,0005            | 0,0006            | 0,0001                  | 0,0001                  | 0,0000                  |
| 35   | 35.9374          | 0,17          | 5,72          | 0,0346            | 0,0012            | 0,0002            | 0,0000                  | 0,0001                  | 0,0011                  |
| 36   | 36.0537          | 0,17          | 5,74          | 0,0001            | 0,0012            | 0,0013            | 0,0004                  | 0,0040                  | 0,0022                  |
| 37   | 36.6564          | 0,17          | 5,83          | 0,0001            | 0,0001            | 0,0025            | 0,0013                  | 0,0034                  | 0,0001                  |
| 38   | 38.582           | 0,16          | 6,14          | 0,0008            | 0,0082            | 0,0042            | 0,0006                  | 0,0016                  | 0,0050                  |
| 39   | 39.3483          | 0,16          | 6,26          | 0,0028            | 0,0003            | 0,0012            | 0,0002                  | 0,0018                  | 0,0006                  |

| Mode | Omega<br>[rad/s] | Period<br>[s] | Freq.<br>[Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|------------------|---------------|---------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 40   | 39.8358          | 0,16          | 6,34          | 0,0043            | 0,0059            | 0,0167            | 0,0190                  | 0,0042                  | 0,0011                  |
| 41   | 40.7808          | 0,15          | 6,49          | 0,0001            | 0,0001            | 0,0066            | 0,0722                  | 0,0104                  | 0,0001                  |
| 42   | 41.842           | 0,15          | 6,66          | 0,0146            | 0,0006            | 0,0003            | 0,0011                  | 0,0007                  | 0,0002                  |
| 43   | 42.4607          | 0,15          | 6,76          | 0,0018            | 0,0007            | 0,0000            | 0,0043                  | 0,0000                  | 0,0002                  |
| 44   | 42.825           | 0,15          | 6,82          | 0,0008            | 0,0021            | 0,0001            | 0,0018                  | 0,0006                  | 0,0001                  |
| 45   | 43.1437          | 0,15          | 6,87          | 0,0007            | 0,0004            | 0,0009            | 0,0044                  | 0,0010                  | 0,0008                  |
| 46   | 43.7203          | 0,14          | 6,96          | 0,0011            | 0,0010            | 0,0003            | 0,0005                  | 0,0018                  | 0,0051                  |
| 47   | 44.1167          | 0,14          | 7,02          | 0,0017            | 0,0024            | 0,0016            | 0,0015                  | 0,0004                  | 0,0002                  |
| 48   | 44.7707          | 0,14          | 7,13          | 0,0081            | 0,0003            | 0,0002            | 0,0003                  | 0,0012                  | 0,0001                  |
| 49   | 45.1962          | 0,14          | 7,19          | 0,0100            | 0,0007            | 0,0004            | 0,0022                  | 0,0003                  | 0,0003                  |
| 50   | 45.8222          | 0,14          | 7,29          | 0,0308            | 0,0008            | 0,0016            | 0,0012                  | 0,0006                  | 0,0000                  |
| 51   | 47.0874          | 0,13          | 7,49          | 0,0034            | 0,0042            | 0,0021            | 0,0052                  | 0,0044                  | 0,0029                  |
| 52   | 47.4275          | 0,13          | 7,55          | 0,0065            | 0,0001            | 0,0019            | 0,0002                  | 0,0007                  | 0,0007                  |
| 53   | 48.193           | 0,13          | 7,67          | 0,0493            | 0,0041            | 0,0011            | 0,0045                  | 0,0000                  | 0,0040                  |
| 54   | 48.6192          | 0,13          | 7,74          | 0,0080            | 0,0003            | 0,0004            | 0,0007                  | 0,0016                  | 0,0002                  |
| 55   | 49.2749          | 0,13          | 7,84          | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0001                  | 0,0001                  |
| 56   | 50.8022          | 0,12          | 8,09          | 0,0000            | 0,0004            | 0,0001            | 0,0001                  | 0,0004                  | 0,0014                  |
| 57   | 51.5306          | 0,12          | 8,20          | 0,0013            | 0,0015            | 0,0013            | 0,0057                  | 0,0024                  | 0,0011                  |
| 58   | 51.8649          | 0,12          | 8,25          | 0,0006            | 0,0001            | 0,0001            | 0,0007                  | 0,0000                  | 0,0000                  |
| 59   | 52.9001          | 0,12          | 8,42          | 0,0001            | 0,0000            | 0,0054            | 0,0028                  | 0,0075                  | 0,0000                  |
| 60   | 53.2626          | 0,12          | 8,48          | 0,0011            | 0,0001            | 0,0006            | 0,0000                  | 0,0000                  | 0,0000                  |
| 61   | 53.7152          | 0,12          | 8,55          | 0,0000            | 0,0000            | 0,0036            | 0,0000                  | 0,0130                  | 0,0000                  |
| 62   | 54.5111          | 0,12          | 8,68          | 0,0001            | 0,0002            | 0,0000            | 0,0016                  | 0,0001                  | 0,0000                  |
| 63   | 55.2418          | 0,11          | 8,79          | 0,0011            | 0,0002            | 0,0034            | 0,0096                  | 0,0001                  | 0,0000                  |
| 64   | 55.6794          | 0,11          | 8,86          | 0,0001            | 0,0001            | 0,0001            | 0,0003                  | 0,0003                  | 0,0002                  |
| 65   | 56.3912          | 0,11          | 8,97          | 0,0007            | 0,0001            | 0,0011            | 0,0057                  | 0,0001                  | 0,0002                  |
| 66   | 56.9185          | 0,11          | 9,06          | 0,0001            | 0,0002            | 0,0000            | 0,0001                  | 0,0012                  | 0,0000                  |
| 67   | 57.3788          | 0,11          | 9,13          | 0,0015            | 0,0015            | 0,0011            | 0,0021                  | 0,0016                  | 0,0007                  |
| 68   | 57.5226          | 0,11          | 9,16          | 0,0000            | 0,0003            | 0,0028            | 0,0000                  | 0,0023                  | 0,0000                  |
| 69   | 58.2203          | 0,11          | 9,27          | 0,0007            | 0,0000            | 0,0025            | 0,0006                  | 0,0004                  | 0,0001                  |
| 70   | 58.4081          | 0,11          | 9,30          | 0,0000            | 0,0000            | 0,0003            | 0,0158                  | 0,0007                  | 0,0000                  |
| 71   | 59.1375          | 0,11          | 9,41          | 0,0001            | 0,0000            | 0,0001            | 0,0009                  | 0,0001                  | 0,0000                  |
| 72   | 59.5793          | 0,11          | 9,48          | 0,0001            | 0,0000            | 0,0000            | 0,0019                  | 0,0001                  | 0,0000                  |
| 73   | 59.751           | 0,11          | 9,51          | 0,0018            | 0,0000            | 0,0019            | 0,0016                  | 0,0014                  | 0,0000                  |
| 74   | 60.4741          | 0,10          | 9,62          | 0,0005            | 0,0000            | 0,0003            | 0,0019                  | 0,0000                  | 0,0000                  |
| 75   | 60.7404          | 0,10          | 9,67          | 0,0001            | 0,0000            | 0,0003            | 0,0015                  | 0,0000                  | 0,0000                  |
| 76   | 61.2085          | 0,10          | 9,74          | 0,0013            | 0,0001            | 0,0006            | 0,0001                  | 0,0011                  | 0,0002                  |
| 77   | 61.4364          | 0,10          | 9,78          | 0,0001            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 78   | 61.6515          | 0,10          | 9,81          | 0,0002            | 0,0000            | 0,0000            | 0,0001                  | 0,0000                  | 0,0001                  |
| 79   | 62.3791          | 0,10          | 9,93          | 0,0007            | 0,0001            | 0,0003            | 0,0007                  | 0,0000                  | 0,0000                  |
| 80   | 62.9365          | 0,10          | 10,02         | 0,0008            | 0,0000            | 0,0001            | 0,0013                  | 0,0010                  | 0,0001                  |
| 81   | 63.0402          | 0,10          | 10,03         | 0,0001            | 0,0000            | 0,0008            | 0,0011                  | 0,0010                  | 0,0000                  |
| 82   | 63.3234          | 0,10          | 10,08         | 0,0033            | 0,0000            | 0,0123            | 0,0085                  | 0,0057                  | 0,0000                  |
| 83   | 63.6438          | 0,10          | 10,13         | 0,0000            | 0,0000            | 0,0014            | 0,0036                  | 0,0015                  | 0,0000                  |
| 84   | 63.7809          | 0,10          | 10,15         | 0,0000            | 0,0002            | 0,0080            | 0,0023                  | 0,0013                  | 0,0000                  |
| 85   | 64.2374          | 0,10          | 10,22         | 0,0000            | 0,0000            | 0,0030            | 0,0013                  | 0,0059                  | 0,0000                  |
| 86   | 64.4398          | 0,10          | 10,26         | 0,0000            | 0,0001            | 0,0000            | 0,0043                  | 0,0000                  | 0,0000                  |
| 87   | 64.5311          | 0,10          | 10,27         | 0,0000            | 0,0000            | 0,0026            | 0,0050                  | 0,0007                  | 0,0000                  |
| 88   | 64.6445          | 0,10          | 10,29         | 0,0002            | 0,0000            | 0,0000            | 0,0002                  | 0,0002                  | 0,0000                  |
| 89   | 64.9217          | 0,10          | 10,33         | 0,0001            | 0,0001            | 0,0001            | 0,0038                  | 0,0002                  | 0,0000                  |
| 90   | 65.4621          | 0,10          | 10,42         | 0,0006            | 0,0000            | 0,0001            | 0,0000                  | 0,0003                  | 0,0000                  |
| 91   | 65.5032          | 0,10          | 10,43         | 0,0005            | 0,0000            | 0,0000            | 0,0007                  | 0,0004                  | 0,0000                  |
| 92   | 65.7274          | 0,10          | 10,46         | 0,0010            | 0,0000            | 0,0021            | 0,0005                  | 0,0004                  | 0,0000                  |
| 93   | 66.0706          | 0,10          | 10,52         | 0,0018            | 0,0000            | 0,0004            | 0,0009                  | 0,0005                  | 0,0000                  |
| 94   | 66.1877          | 0,09          | 10,53         | 0,0000            | 0,0000            | 0,0004            | 0,0001                  | 0,0010                  | 0,0000                  |
| 95   | 66.2741          | 0,09          | 10,55         | 0,0001            | 0,0000            | 0,0004            | 0,0013                  | 0,0001                  | 0,0000                  |
| 96   | 66.4211          | 0,09          | 10,57         | 0,0004            | 0,0001            | 0,0001            | 0,0001                  | 0,0019                  | 0,0000                  |
| 97   | 66.7322          | 0,09          | 10,62         | 0,0000            | 0,0000            | 0,0002            | 0,0009                  | 0,0000                  | 0,0001                  |
| 98   | 66.7946          | 0,09          | 10,63         | 0,0003            | 0,0000            | 0,0004            | 0,0003                  | 0,0006                  | 0,0000                  |
| 99   | 67.124           | 0,09          | 10,68         | 0,0002            | 0,0000            | 0,0007            | 0,0002                  | 0,0002                  | 0,0000                  |
| 100  | 67.397           | 0,09          | 10,73         | 0,0000            | 0,0000            | 0,0062            | 0,0011                  | 0,0000                  | 0,0000                  |
| 101  | 67.494           | 0,09          | 10,74         | 0,0000            | 0,0003            | 0,0004            | 0,0004                  | 0,0012                  | 0,0009                  |
| 102  | 68.2656          | 0,09          | 10,86         | 0,0002            | 0,0001            | 0,0000            | 0,0001                  | 0,0006                  | 0,0000                  |
| 103  | 68.5522          | 0,09          | 10,91         | 0,0001            | 0,0000            | 0,0001            | 0,0000                  | 0,0002                  | 0,0000                  |
| 104  | 69.1968          | 0,09          | 11,01         | 0,0005            | 0,0000            | 0,0014            | 0,0003                  | 0,0011                  | 0,0000                  |
| 105  | 69.3148          | 0,09          | 11,03         | 0,0001            | 0,0001            | 0,0001            | 0,0015                  | 0,0002                  | 0,0003                  |
| 106  | 69.4888          | 0,09          | 11,06         | 0,0000            | 0,0004            | 0,0001            | 0,0004                  | 0,0000                  | 0,0011                  |
| 107  | 69.7658          | 0,09          | 11,10         | 0,0001            | 0,0004            | 0,0008            | 0,0003                  | 0,0002                  | 0,0023                  |

| Mode | Omega [rad/s] | Period [s] | Freq. [Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|---------------|------------|------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 108  | 69.9213       | 0,09       | 11,13      | 0,0002            | 0,0003            | 0,0025            | 0,0008                  | 0,0001                  | 0,0005                  |
| 109  | 70.288        | 0,09       | 11,19      | 0,0000            | 0,0000            | 0,0031            | 0,0004                  | 0,0039                  | 0,0000                  |
| 110  | 70.4273       | 0,09       | 11,21      | 0,0000            | 0,0000            | 0,0014            | 0,0001                  | 0,0003                  | 0,0000                  |
| 111  | 70.4871       | 0,09       | 11,22      | 0,0000            | 0,0000            | 0,0000            | 0,0010                  | 0,0006                  | 0,0000                  |
| 112  | 70.6705       | 0,09       | 11,25      | 0,0008            | 0,0001            | 0,0031            | 0,0014                  | 0,0010                  | 0,0000                  |
| 113  | 70.8229       | 0,09       | 11,27      | 0,0001            | 0,0001            | 0,0094            | 0,0060                  | 0,0059                  | 0,0001                  |
| 114  | 70.9161       | 0,09       | 11,29      | 0,0002            | 0,0001            | 0,0001            | 0,0001                  | 0,0027                  | 0,0001                  |
| 115  | 71.2453       | 0,09       | 11,34      | 0,0003            | 0,0000            | 0,0005            | 0,0001                  | 0,0000                  | 0,0000                  |
| 116  | 71.9153       | 0,09       | 11,45      | 0,0008            | 0,0001            | 0,0005            | 0,0004                  | 0,0000                  | 0,0000                  |
| 117  | 72.337        | 0,09       | 11,51      | 0,0003            | 0,0000            | 0,0027            | 0,0001                  | 0,0008                  | 0,0000                  |
| 118  | 72.4841       | 0,09       | 11,54      | 0,0000            | 0,0001            | 0,0056            | 0,0020                  | 0,0065                  | 0,0001                  |
| 119  | 72.7591       | 0,09       | 11,58      | 0,0002            | 0,0000            | 0,0004            | 0,0002                  | 0,0006                  | 0,0000                  |
| 120  | 73.262        | 0,09       | 11,66      | 0,0002            | 0,0000            | 0,0000            | 0,0005                  | 0,0001                  | 0,0000                  |
| 121  | 73.3949       | 0,09       | 11,68      | 0,0002            | 0,0000            | 0,0000            | 0,0023                  | 0,0000                  | 0,0000                  |
| 122  | 73.4538       | 0,09       | 11,69      | 0,0006            | 0,0000            | 0,0006            | 0,0008                  | 0,0001                  | 0,0000                  |
| 123  | 73.502        | 0,09       | 11,70      | 0,0001            | 0,0000            | 0,0001            | 0,0011                  | 0,0004                  | 0,0000                  |
| 124  | 73.5996       | 0,09       | 11,71      | 0,0000            | 0,0000            | 0,0004            | 0,0001                  | 0,0004                  | 0,0000                  |
| 125  | 74.0748       | 0,08       | 11,79      | 0,0000            | 0,0000            | 0,0010            | 0,0000                  | 0,0000                  | 0,0000                  |
| 126  | 74.318        | 0,08       | 11,83      | 0,0000            | 0,0000            | 0,0016            | 0,0004                  | 0,0006                  | 0,0000                  |
| 127  | 74.4657       | 0,08       | 11,85      | 0,0018            | 0,0000            | 0,0001            | 0,0001                  | 0,0020                  | 0,0001                  |
| 128  | 74.6954       | 0,08       | 11,89      | 0,0000            | 0,0001            | 0,0005            | 0,0000                  | 0,0008                  | 0,0002                  |
| 129  | 74.7524       | 0,08       | 11,90      | 0,0005            | 0,0001            | 0,0035            | 0,0000                  | 0,0098                  | 0,0003                  |
| 130  | 75.043        | 0,08       | 11,94      | 0,0000            | 0,0000            | 0,0006            | 0,0001                  | 0,0011                  | 0,0000                  |
| 131  | 75.1312       | 0,08       | 11,96      | 0,0002            | 0,0000            | 0,0008            | 0,0001                  | 0,0001                  | 0,0000                  |
| 132  | 75.4435       | 0,08       | 12,01      | 0,0001            | 0,0000            | 0,0005            | 0,0002                  | 0,0002                  | 0,0000                  |
| 133  | 75.559        | 0,08       | 12,03      | 0,0002            | 0,0001            | 0,0010            | 0,0101                  | 0,0003                  | 0,0001                  |
| 134  | 75.677        | 0,08       | 12,04      | 0,0000            | 0,0000            | 0,0034            | 0,0000                  | 0,0035                  | 0,0001                  |
| 135  | 75.7641       | 0,08       | 12,06      | 0,0002            | 0,0000            | 0,0000            | 0,0013                  | 0,0004                  | 0,0000                  |
| 136  | 76.1435       | 0,08       | 12,12      | 0,0003            | 0,0003            | 0,0002            | 0,0006                  | 0,0004                  | 0,0003                  |
| 137  | 76.5336       | 0,08       | 12,18      | 0,0003            | 0,0000            | 0,0001            | 0,0001                  | 0,0000                  | 0,0001                  |
| 138  | 76.7933       | 0,08       | 12,22      | 0,0000            | 0,0000            | 0,0000            | 0,0002                  | 0,0001                  | 0,0000                  |
| 139  | 76.8225       | 0,08       | 12,23      | 0,0004            | 0,0002            | 0,0001            | 0,0001                  | 0,0000                  | 0,0000                  |
| 140  | 77.2993       | 0,08       | 12,30      | 0,0000            | 0,0001            | 0,0001            | 0,0004                  | 0,0005                  | 0,0001                  |
| 141  | 77.641        | 0,08       | 12,36      | 0,0002            | 0,0000            | 0,0010            | 0,0042                  | 0,0024                  | 0,0000                  |
| 142  | 77.7845       | 0,08       | 12,38      | 0,0000            | 0,0000            | 0,0133            | 0,0096                  | 0,0163                  | 0,0000                  |
| 143  | 77.8064       | 0,08       | 12,38      | 0,0005            | 0,0001            | 0,0001            | 0,0002                  | 0,0003                  | 0,0000                  |
| 144  | 78.2729       | 0,08       | 12,46      | 0,0000            | 0,0000            | 0,0026            | 0,0001                  | 0,0051                  | 0,0000                  |
| 145  | 78.3964       | 0,08       | 12,48      | 0,0006            | 0,0000            | 0,0013            | 0,0021                  | 0,0019                  | 0,0000                  |
| 146  | 78.7706       | 0,08       | 12,54      | 0,0001            | 0,0000            | 0,0003            | 0,0001                  | 0,0003                  | 0,0000                  |
| 147  | 78.8277       | 0,08       | 12,55      | 0,0008            | 0,0005            | 0,0000            | 0,0010                  | 0,0010                  | 0,0005                  |
| 148  | 78.8991       | 0,08       | 12,56      | 0,0000            | 0,0000            | 0,0238            | 0,0000                  | 0,0191                  | 0,0001                  |
| 149  | 78.9677       | 0,08       | 12,57      | 0,0008            | 0,0000            | 0,0024            | 0,0017                  | 0,0009                  | 0,0000                  |
| 150  | 79.4783       | 0,08       | 12,65      | 0,0003            | 0,0001            | 0,0003            | 0,0005                  | 0,0009                  | 0,0000                  |
| 151  | 79.483        | 0,08       | 12,65      | 0,0002            | 0,0001            | 0,0001            | 0,0005                  | 0,0003                  | 0,0001                  |
| 152  | 79.5464       | 0,08       | 12,66      | 0,0003            | 0,0002            | 0,0001            | 0,0000                  | 0,0000                  | 0,0001                  |
| 153  | 79.8151       | 0,08       | 12,70      | 0,0000            | 0,0005            | 0,0021            | 0,0009                  | 0,0003                  | 0,0002                  |
| 154  | 80.081        | 0,08       | 12,75      | 0,0000            | 0,0000            | 0,0004            | 0,0022                  | 0,0013                  | 0,0001                  |
| 155  | 80.2892       | 0,08       | 12,78      | 0,0003            | 0,0007            | 0,0007            | 0,0005                  | 0,0008                  | 0,0007                  |
| 156  | 80.5072       | 0,08       | 12,81      | 0,0000            | 0,0000            | 0,0014            | 0,0002                  | 0,0000                  | 0,0000                  |
| 157  | 80.8037       | 0,08       | 12,86      | 0,0002            | 0,0002            | 0,0005            | 0,0025                  | 0,0002                  | 0,0005                  |
| 158  | 81.1311       | 0,08       | 12,91      | 0,0002            | 0,0005            | 0,0000            | 0,0010                  | 0,0000                  | 0,0005                  |
| 159  | 81.1696       | 0,08       | 12,92      | 0,0000            | 0,0001            | 0,0033            | 0,0016                  | 0,0016                  | 0,0000                  |
| 160  | 81.3726       | 0,08       | 12,95      | 0,0000            | 0,0000            | 0,0006            | 0,0001                  | 0,0001                  | 0,0000                  |
| 161  | 81.9234       | 0,08       | 13,04      | 0,0000            | 0,0000            | 0,0006            | 0,0008                  | 0,0003                  | 0,0001                  |
| 162  | 82.2376       | 0,08       | 13,09      | 0,0000            | 0,0002            | 0,0002            | 0,0003                  | 0,0011                  | 0,0002                  |
| 163  | 82.2725       | 0,08       | 13,09      | 0,0000            | 0,0000            | 0,0015            | 0,0145                  | 0,0017                  | 0,0000                  |
| 164  | 82.4355       | 0,08       | 13,12      | 0,0000            | 0,0000            | 0,0001            | 0,0008                  | 0,0004                  | 0,0000                  |
| 165  | 82.599        | 0,08       | 13,15      | 0,0004            | 0,0003            | 0,0010            | 0,0002                  | 0,0034                  | 0,0008                  |
| 166  | 82.8014       | 0,08       | 13,18      | 0,0001            | 0,0000            | 0,0000            | 0,0002                  | 0,0000                  | 0,0000                  |
| 167  | 82.9964       | 0,08       | 13,21      | 0,0000            | 0,0000            | 0,0017            | 0,0056                  | 0,0024                  | 0,0000                  |
| 168  | 83.2966       | 0,08       | 13,26      | 0,0006            | 0,0001            | 0,0017            | 0,0006                  | 0,0013                  | 0,0001                  |
| 169  | 83.3605       | 0,08       | 13,27      | 0,0006            | 0,0000            | 0,0000            | 0,0005                  | 0,0002                  | 0,0000                  |
| 170  | 83.368        | 0,08       | 13,27      | 0,0001            | 0,0002            | 0,0002            | 0,0000                  | 0,0000                  | 0,0000                  |
| 171  | 83.8176       | 0,07       | 13,34      | 0,0000            | 0,0000            | 0,0020            | 0,0143                  | 0,0062                  | 0,0000                  |
| 172  | 83.8648       | 0,07       | 13,35      | 0,0000            | 0,0001            | 0,0066            | 0,0006                  | 0,0058                  | 0,0001                  |
| 173  | 83.9559       | 0,07       | 13,36      | 0,0000            | 0,0000            | 0,0001            | 0,0001                  | 0,0003                  | 0,0001                  |
| 174  | 84.2295       | 0,07       | 13,41      | 0,0000            | 0,0000            | 0,0007            | 0,0001                  | 0,0015                  | 0,0000                  |
| 175  | 84.3236       | 0,07       | 13,42      | 0,0004            | 0,0000            | 0,0008            | 0,0002                  | 0,0005                  | 0,0002                  |

| Mode | Omega<br>[rad/s] | Period<br>[s] | Freq.<br>[Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|------------------|---------------|---------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 176  | 84.4338          | 0,07          | 13,44         | 0,0000            | 0,0000            | 0,0003            | 0,0001                  | 0,0000                  | 0,0000                  |
| 177  | 84.5846          | 0,07          | 13,46         | 0,0003            | 0,0000            | 0,0010            | 0,0001                  | 0,0019                  | 0,0000                  |
| 178  | 84.7824          | 0,07          | 13,49         | 0,0006            | 0,0000            | 0,0031            | 0,0001                  | 0,0000                  | 0,0000                  |
| 179  | 84.8521          | 0,07          | 13,50         | 0,0005            | 0,0000            | 0,0016            | 0,0029                  | 0,0025                  | 0,0000                  |
| 180  | 84.9115          | 0,07          | 13,51         | 0,0001            | 0,0002            | 0,0002            | 0,0001                  | 0,0007                  | 0,0005                  |
| 181  | 85.0067          | 0,07          | 13,53         | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 182  | 85.2014          | 0,07          | 13,56         | 0,0003            | 0,0001            | 0,0000            | 0,0005                  | 0,0010                  | 0,0001                  |
| 183  | 85.2844          | 0,07          | 13,57         | 0,0001            | 0,0000            | 0,0016            | 0,0089                  | 0,0019                  | 0,0000                  |
| 184  | 85.4778          | 0,07          | 13,60         | 0,0001            | 0,0000            | 0,0002            | 0,0007                  | 0,0003                  | 0,0000                  |
| 185  | 85.9133          | 0,07          | 13,67         | 0,0000            | 0,0000            | 0,0002            | 0,0017                  | 0,0003                  | 0,0000                  |
| 186  | 86.066           | 0,07          | 13,70         | 0,0002            | 0,0000            | 0,0002            | 0,0024                  | 0,0001                  | 0,0000                  |
| 187  | 86.22            | 0,07          | 13,72         | 0,0000            | 0,0005            | 0,0004            | 0,0005                  | 0,0009                  | 0,0007                  |
| 188  | 86.4557          | 0,07          | 13,76         | 0,0001            | 0,0000            | 0,0001            | 0,0005                  | 0,0006                  | 0,0001                  |
| 189  | 86.6527          | 0,07          | 13,79         | 0,0003            | 0,0000            | 0,0010            | 0,0000                  | 0,0012                  | 0,0001                  |
| 190  | 86.7596          | 0,07          | 13,81         | 0,0000            | 0,0001            | 0,0000            | 0,0002                  | 0,0019                  | 0,0000                  |
| 191  | 86.8677          | 0,07          | 13,83         | 0,0001            | 0,0000            | 0,0009            | 0,0005                  | 0,0004                  | 0,0000                  |
| 192  | 86.9214          | 0,07          | 13,83         | 0,0002            | 0,0000            | 0,0002            | 0,0003                  | 0,0003                  | 0,0000                  |
| 193  | 87.1596          | 0,07          | 13,87         | 0,0016            | 0,0000            | 0,0052            | 0,0007                  | 0,0053                  | 0,0000                  |
| 194  | 87.2587          | 0,07          | 13,89         | 0,0001            | 0,0004            | 0,0011            | 0,0002                  | 0,0026                  | 0,0010                  |
| 195  | 87.604           | 0,07          | 13,94         | 0,0000            | 0,0001            | 0,0014            | 0,0002                  | 0,0011                  | 0,0000                  |
| 196  | 87.6322          | 0,07          | 13,95         | 0,0000            | 0,0001            | 0,0004            | 0,0008                  | 0,0000                  | 0,0000                  |
| 197  | 87.6411          | 0,07          | 13,95         | 0,0000            | 0,0001            | 0,0004            | 0,0014                  | 0,0019                  | 0,0003                  |
| 198  | 87.744           | 0,07          | 13,96         | 0,0000            | 0,0000            | 0,0021            | 0,0002                  | 0,0028                  | 0,0000                  |
| 199  | 87.8576          | 0,07          | 13,98         | 0,0000            | 0,0000            | 0,0004            | 0,0000                  | 0,0006                  | 0,0000                  |
| 200  | 87.9482          | 0,07          | 14,00         | 0,0000            | 0,0001            | 0,0065            | 0,0002                  | 0,0015                  | 0,0000                  |
| 201  | 88.1158          | 0,07          | 14,02         | 0,0000            | 0,0000            | 0,0000            | 0,0003                  | 0,0001                  | 0,0000                  |
| 202  | 88.5112          | 0,07          | 14,09         | 0,0000            | 0,0000            | 0,0007            | 0,0000                  | 0,0001                  | 0,0000                  |
| 203  | 89.1341          | 0,07          | 14,19         | 0,0001            | 0,0000            | 0,0000            | 0,0027                  | 0,0011                  | 0,0000                  |
| 204  | 89.3048          | 0,07          | 14,21         | 0,0014            | 0,0001            | 0,0009            | 0,0015                  | 0,0009                  | 0,0001                  |
| 205  | 89.5003          | 0,07          | 14,24         | 0,0011            | 0,0002            | 0,0033            | 0,0003                  | 0,0026                  | 0,0000                  |
| 206  | 89.7893          | 0,07          | 14,29         | 0,0001            | 0,0000            | 0,0005            | 0,0000                  | 0,0002                  | 0,0001                  |
| 207  | 90.081           | 0,07          | 14,34         | 0,0011            | 0,0000            | 0,0004            | 0,0000                  | 0,0007                  | 0,0000                  |
| 208  | 90.143           | 0,07          | 14,35         | 0,0002            | 0,0000            | 0,0004            | 0,0001                  | 0,0009                  | 0,0000                  |
| 209  | 90.4025          | 0,07          | 14,39         | 0,0000            | 0,0001            | 0,0020            | 0,0018                  | 0,0006                  | 0,0001                  |
| 210  | 90.6252          | 0,07          | 14,42         | 0,0000            | 0,0000            | 0,0054            | 0,0001                  | 0,0068                  | 0,0000                  |
| 211  | 90.8089          | 0,07          | 14,45         | 0,0002            | 0,0000            | 0,0089            | 0,0002                  | 0,0002                  | 0,0000                  |
| 212  | 90.8584          | 0,07          | 14,46         | 0,0000            | 0,0000            | 0,0025            | 0,0001                  | 0,0070                  | 0,0000                  |
| 213  | 91.4714          | 0,07          | 14,56         | 0,0001            | 0,0000            | 0,0028            | 0,0001                  | 0,0011                  | 0,0000                  |
| 214  | 91.6866          | 0,07          | 14,59         | 0,0002            | 0,0000            | 0,0103            | 0,0000                  | 0,0146                  | 0,0000                  |
| 215  | 91.7619          | 0,07          | 14,60         | 0,0000            | 0,0000            | 0,0021            | 0,0001                  | 0,0000                  | 0,0000                  |
| 216  | 92.1966          | 0,07          | 14,67         | 0,0000            | 0,0000            | 0,0046            | 0,0020                  | 0,0015                  | 0,0000                  |
| 217  | 92.2887          | 0,07          | 14,69         | 0,0000            | 0,0000            | 0,0001            | 0,0000                  | 0,0003                  | 0,0000                  |
| 218  | 92.5844          | 0,07          | 14,74         | 0,0000            | 0,0000            | 0,0001            | 0,0017                  | 0,0000                  | 0,0000                  |
| 219  | 92.7982          | 0,07          | 14,77         | 0,0019            | 0,0008            | 0,0080            | 0,0016                  | 0,0067                  | 0,0009                  |
| 220  | 93.1348          | 0,07          | 14,82         | 0,0000            | 0,0001            | 0,0049            | 0,0001                  | 0,0025                  | 0,0003                  |
| 221  | 93.1603          | 0,07          | 14,83         | 0,0003            | 0,0001            | 0,0025            | 0,0000                  | 0,0010                  | 0,0003                  |
| 222  | 93.3339          | 0,07          | 14,85         | 0,0000            | 0,0015            | 0,0003            | 0,0003                  | 0,0000                  | 0,0018                  |
| 223  | 93.6329          | 0,07          | 14,90         | 0,0000            | 0,0000            | 0,0014            | 0,0007                  | 0,0011                  | 0,0000                  |
| 224  | 94.2307          | 0,07          | 15,00         | 0,0011            | 0,0000            | 0,0002            | 0,0006                  | 0,0001                  | 0,0000                  |
| 225  | 94.2785          | 0,07          | 15,00         | 0,0002            | 0,0000            | 0,0055            | 0,0005                  | 0,0004                  | 0,0000                  |
| 226  | 94.5142          | 0,07          | 15,04         | 0,0000            | 0,0000            | 0,0002            | 0,0000                  | 0,0001                  | 0,0000                  |
| 227  | 94.9002          | 0,07          | 15,10         | 0,0011            | 0,0000            | 0,0027            | 0,0001                  | 0,0025                  | 0,0002                  |
| 228  | 95.0564          | 0,07          | 15,13         | 0,0000            | 0,0001            | 0,0000            | 0,0000                  | 0,0011                  | 0,0001                  |
| 229  | 95.2329          | 0,07          | 15,16         | 0,0007            | 0,0001            | 0,0028            | 0,0008                  | 0,0004                  | 0,0001                  |
| 230  | 95.3914          | 0,07          | 15,18         | 0,0001            | 0,0003            | 0,0002            | 0,0035                  | 0,0006                  | 0,0003                  |
| 231  | 95.6457          | 0,07          | 15,22         | 0,0000            | 0,0000            | 0,0009            | 0,0031                  | 0,0005                  | 0,0001                  |
| 232  | 95.7955          | 0,07          | 15,25         | 0,0006            | 0,0000            | 0,0001            | 0,0021                  | 0,0001                  | 0,0000                  |
| 233  | 96.2596          | 0,07          | 15,32         | 0,0008            | 0,0002            | 0,0003            | 0,0007                  | 0,0001                  | 0,0003                  |
| 234  | 96.2972          | 0,07          | 15,33         | 0,0001            | 0,0000            | 0,0024            | 0,0000                  | 0,0039                  | 0,0000                  |
| 235  | 96.6987          | 0,06          | 15,39         | 0,0001            | 0,0000            | 0,0011            | 0,0001                  | 0,0034                  | 0,0000                  |
| 236  | 96.8881          | 0,06          | 15,42         | 0,0000            | 0,0001            | 0,0003            | 0,0000                  | 0,0002                  | 0,0000                  |
| 237  | 97.0736          | 0,06          | 15,45         | 0,0001            | 0,0000            | 0,0049            | 0,0000                  | 0,0014                  | 0,0000                  |
| 238  | 97.2156          | 0,06          | 15,47         | 0,0000            | 0,0000            | 0,0008            | 0,0001                  | 0,0002                  | 0,0001                  |
| 239  | 97.5164          | 0,06          | 15,52         | 0,0010            | 0,0001            | 0,0016            | 0,0009                  | 0,0002                  | 0,0000                  |
| 240  | 97.6074          | 0,06          | 15,53         | 0,0005            | 0,0000            | 0,0000            | 0,0004                  | 0,0000                  | 0,0001                  |
| 241  | 97.8028          | 0,06          | 15,57         | 0,0001            | 0,0000            | 0,0001            | 0,0002                  | 0,0012                  | 0,0000                  |
| 242  | 97.9721          | 0,06          | 15,59         | 0,0001            | 0,0001            | 0,0012            | 0,0001                  | 0,0006                  | 0,0001                  |
| 243  | 98.2715          | 0,06          | 15,64         | 0,0005            | 0,0000            | 0,0005            | 0,0002                  | 0,0021                  | 0,0000                  |

| Mode | Omega [rad/s] | Period [s] | Freq. [Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|---------------|------------|------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 244  | 98.3479       | 0,06       | 15,65      | 0,0000            | 0,0000            | 0,0026            | 0,0000                  | 0,0005                  | 0,0001                  |
| 245  | 98.8444       | 0,06       | 15,73      | 0,0000            | 0,0000            | 0,0001            | 0,0002                  | 0,0008                  | 0,0000                  |
| 246  | 98.9785       | 0,06       | 15,75      | 0,0009            | 0,0000            | 0,0018            | 0,0002                  | 0,0013                  | 0,0000                  |
| 247  | 99.0924       | 0,06       | 15,77      | 0,0002            | 0,0004            | 0,0014            | 0,0000                  | 0,0002                  | 0,0003                  |
| 248  | 99.1412       | 0,06       | 15,78      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 249  | 99.2348       | 0,06       | 15,79      | 0,0000            | 0,0001            | 0,0009            | 0,0002                  | 0,0018                  | 0,0002                  |
| 250  | 99.3437       | 0,06       | 15,81      | 0,0000            | 0,0000            | 0,0000            | 0,0015                  | 0,0003                  | 0,0000                  |
| 251  | 99.4477       | 0,06       | 15,83      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 252  | 99.7429       | 0,06       | 15,87      | 0,0000            | 0,0000            | 0,0015            | 0,0000                  | 0,0006                  | 0,0000                  |
| 253  | 99.882        | 0,06       | 15,90      | 0,0001            | 0,0011            | 0,0014            | 0,0025                  | 0,0035                  | 0,0025                  |
| 254  | 100.211       | 0,06       | 15,95      | 0,0001            | 0,0000            | 0,0016            | 0,0007                  | 0,0000                  | 0,0001                  |
| 255  | 100.414       | 0,06       | 15,98      | 0,0000            | 0,0000            | 0,0004            | 0,0000                  | 0,0002                  | 0,0000                  |
| 256  | 100.671       | 0,06       | 16,02      | 0,0005            | 0,0000            | 0,0002            | 0,0001                  | 0,0000                  | 0,0001                  |
| 257  | 101.095       | 0,06       | 16,09      | 0,0000            | 0,0000            | 0,0002            | 0,0001                  | 0,0002                  | 0,0000                  |
| 258  | 101.228       | 0,06       | 16,11      | 0,0011            | 0,0000            | 0,0009            | 0,0000                  | 0,0000                  | 0,0000                  |
| 259  | 101.433       | 0,06       | 16,14      | 0,0000            | 0,0000            | 0,0001            | 0,0000                  | 0,0000                  | 0,0000                  |
| 260  | 101.451       | 0,06       | 16,15      | 0,0000            | 0,0000            | 0,0006            | 0,0000                  | 0,0007                  | 0,0000                  |
| 261  | 101.533       | 0,06       | 16,16      | 0,0003            | 0,0004            | 0,0005            | 0,0000                  | 0,0001                  | 0,0005                  |
| 262  | 101.743       | 0,06       | 16,19      | 0,0000            | 0,0000            | 0,0002            | 0,0003                  | 0,0004                  | 0,0000                  |
| 263  | 101.906       | 0,06       | 16,22      | 0,0006            | 0,0000            | 0,0006            | 0,0002                  | 0,0005                  | 0,0001                  |
| 264  | 102.176       | 0,06       | 16,26      | 0,0000            | 0,0000            | 0,0002            | 0,0002                  | 0,0008                  | 0,0000                  |
| 265  | 102.436       | 0,06       | 16,30      | 0,0000            | 0,0001            | 0,0016            | 0,0003                  | 0,0020                  | 0,0002                  |
| 266  | 102.806       | 0,06       | 16,36      | 0,0014            | 0,0001            | 0,0011            | 0,0005                  | 0,0038                  | 0,0002                  |
| 267  | 102.861       | 0,06       | 16,37      | 0,0000            | 0,0000            | 0,0003            | 0,0016                  | 0,0009                  | 0,0000                  |
| 268  | 103.006       | 0,06       | 16,39      | 0,0001            | 0,0001            | 0,0003            | 0,0001                  | 0,0000                  | 0,0000                  |
| 269  | 103.442       | 0,06       | 16,46      | 0,0016            | 0,0001            | 0,0016            | 0,0001                  | 0,0028                  | 0,0001                  |
| 270  | 103.725       | 0,06       | 16,51      | 0,0000            | 0,0000            | 0,0006            | 0,0014                  | 0,0000                  | 0,0000                  |
| 271  | 103.842       | 0,06       | 16,53      | 0,0000            | 0,0000            | 0,0009            | 0,0032                  | 0,0002                  | 0,0000                  |
| 272  | 103.861       | 0,06       | 16,53      | 0,0000            | 0,0001            | 0,0032            | 0,0000                  | 0,0001                  | 0,0000                  |
| 273  | 104.03        | 0,06       | 16,56      | 0,0006            | 0,0000            | 0,0000            | 0,0006                  | 0,0005                  | 0,0000                  |
| 274  | 104.531       | 0,06       | 16,64      | 0,0001            | 0,0001            | 0,0002            | 0,0000                  | 0,0003                  | 0,0000                  |
| 275  | 104.713       | 0,06       | 16,67      | 0,0000            | 0,0000            | 0,0000            | 0,0002                  | 0,0000                  | 0,0000                  |
| 276  | 104.948       | 0,06       | 16,70      | 0,0000            | 0,0000            | 0,0006            | 0,0002                  | 0,0000                  | 0,0001                  |
| 277  | 104.967       | 0,06       | 16,71      | 0,0000            | 0,0003            | 0,0006            | 0,0001                  | 0,0003                  | 0,0000                  |
| 278  | 105.035       | 0,06       | 16,72      | 0,0000            | 0,0004            | 0,0001            | 0,0001                  | 0,0007                  | 0,0010                  |
| 279  | 105.437       | 0,06       | 16,78      | 0,0000            | 0,0001            | 0,0000            | 0,0002                  | 0,0000                  | 0,0001                  |
| 280  | 106.028       | 0,06       | 16,87      | 0,0009            | 0,0000            | 0,0009            | 0,0003                  | 0,0003                  | 0,0001                  |
| 281  | 106.253       | 0,06       | 16,91      | 0,0000            | 0,0001            | 0,0000            | 0,0001                  | 0,0000                  | 0,0000                  |
| 282  | 106.309       | 0,06       | 16,92      | 0,0000            | 0,0000            | 0,0012            | 0,0001                  | 0,0013                  | 0,0000                  |
| 283  | 106.351       | 0,06       | 16,93      | 0,0001            | 0,0000            | 0,0016            | 0,0025                  | 0,0028                  | 0,0000                  |
| 284  | 106.625       | 0,06       | 16,97      | 0,0000            | 0,0000            | 0,0014            | 0,0003                  | 0,0017                  | 0,0001                  |
| 285  | 106.749       | 0,06       | 16,99      | 0,0005            | 0,0001            | 0,0002            | 0,0000                  | 0,0000                  | 0,0001                  |
| 286  | 107.14        | 0,06       | 17,05      | 0,0001            | 0,0000            | 0,0000            | 0,0000                  | 0,0002                  | 0,0000                  |
| 287  | 107.164       | 0,06       | 17,06      | 0,0008            | 0,0002            | 0,0002            | 0,0002                  | 0,0011                  | 0,0002                  |
| 288  | 107.432       | 0,06       | 17,10      | 0,0002            | 0,0001            | 0,0001            | 0,0001                  | 0,0001                  | 0,0000                  |
| 289  | 107.483       | 0,06       | 17,11      | 0,0000            | 0,0000            | 0,0012            | 0,0007                  | 0,0018                  | 0,0000                  |
| 290  | 107.787       | 0,06       | 17,15      | 0,0002            | 0,0004            | 0,0025            | 0,0001                  | 0,0044                  | 0,0007                  |
| 291  | 107.821       | 0,06       | 17,16      | 0,0003            | 0,0000            | 0,0001            | 0,0004                  | 0,0001                  | 0,0000                  |
| 292  | 107.926       | 0,06       | 17,18      | 0,0000            | 0,0001            | 0,0004            | 0,0001                  | 0,0007                  | 0,0002                  |
| 293  | 108.627       | 0,06       | 17,29      | 0,0022            | 0,0000            | 0,0000            | 0,0000                  | 0,0003                  | 0,0000                  |
| 294  | 108.906       | 0,06       | 17,33      | 0,0000            | 0,0000            | 0,0001            | 0,0001                  | 0,0000                  | 0,0000                  |
| 295  | 109.008       | 0,06       | 17,35      | 0,0000            | 0,0000            | 0,0003            | 0,0000                  | 0,0006                  | 0,0000                  |
| 296  | 109.323       | 0,06       | 17,40      | 0,0010            | 0,0001            | 0,0000            | 0,0000                  | 0,0001                  | 0,0000                  |
| 297  | 109.474       | 0,06       | 17,42      | 0,0001            | 0,0000            | 0,0000            | 0,0001                  | 0,0000                  | 0,0000                  |
| 298  | 109.536       | 0,06       | 17,43      | 0,0002            | 0,0002            | 0,0000            | 0,0002                  | 0,0000                  | 0,0002                  |
| 299  | 109.645       | 0,06       | 17,45      | 0,0000            | 0,0002            | 0,0006            | 0,0003                  | 0,0012                  | 0,0005                  |
| 300  | 109.727       | 0,06       | 17,46      | 0,0004            | 0,0000            | 0,0000            | 0,0003                  | 0,0001                  | 0,0001                  |
| 301  | 109.841       | 0,06       | 17,48      | 0,0005            | 0,0000            | 0,0000            | 0,0001                  | 0,0000                  | 0,0000                  |
| 302  | 109.888       | 0,06       | 17,49      | 0,0004            | 0,0001            | 0,0000            | 0,0003                  | 0,0001                  | 0,0001                  |
| 303  | 110.087       | 0,06       | 17,52      | 0,0000            | 0,0000            | 0,0001            | 0,0001                  | 0,0001                  | 0,0000                  |
| 304  | 110.158       | 0,06       | 17,53      | 0,0000            | 0,0000            | 0,0001            | 0,0000                  | 0,0001                  | 0,0000                  |
| 305  | 110.203       | 0,06       | 17,54      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 306  | 110.211       | 0,06       | 17,54      | 0,0000            | 0,0001            | 0,0001            | 0,0002                  | 0,0001                  | 0,0000                  |
| 307  | 110.232       | 0,06       | 17,54      | 0,0002            | 0,0003            | 0,0000            | 0,0003                  | 0,0000                  | 0,0000                  |
| 308  | 110.268       | 0,06       | 17,55      | 0,0000            | 0,0001            | 0,0000            | 0,0001                  | 0,0000                  | 0,0000                  |
| 309  | 110.347       | 0,06       | 17,56      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 310  | 110.411       | 0,06       | 17,57      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0001                  | 0,0000                  |
| 311  | 110.488       | 0,06       | 17,58      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |




| Mode | Omega [rad/s] | Period [s] | Freq. [Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|---------------|------------|------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 312  | 110.544       | 0,06       | 17,59      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 313  | 110.604       | 0,06       | 17,60      | 0,0002            | 0,0002            | 0,0001            | 0,0006                  | 0,0000                  | 0,0004                  |
| 314  | 110.631       | 0,06       | 17,61      | 0,0000            | 0,0003            | 0,0000            | 0,0004                  | 0,0000                  | 0,0002                  |
| 315  | 110.681       | 0,06       | 17,62      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 316  | 110.719       | 0,06       | 17,62      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 317  | 110.78        | 0,06       | 17,63      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 318  | 111.121       | 0,06       | 17,69      | 0,0000            | 0,0001            | 0,0000            | 0,0001                  | 0,0001                  | 0,0004                  |
| 319  | 111.15        | 0,06       | 17,69      | 0,0000            | 0,0000            | 0,0005            | 0,0000                  | 0,0000                  | 0,0000                  |
| 320  | 111.212       | 0,06       | 17,70      | 0,0000            | 0,0001            | 0,0000            | 0,0002                  | 0,0000                  | 0,0000                  |
| 321  | 111.355       | 0,06       | 17,72      | 0,0002            | 0,0000            | 0,0007            | 0,0000                  | 0,0005                  | 0,0000                  |
| 322  | 111.444       | 0,06       | 17,74      | 0,0000            | 0,0001            | 0,0001            | 0,0001                  | 0,0000                  | 0,0001                  |
| 323  | 111.59        | 0,06       | 17,76      | 0,0000            | 0,0006            | 0,0001            | 0,0009                  | 0,0002                  | 0,0009                  |
| 324  | 112.21        | 0,06       | 17,86      | 0,0002            | 0,0002            | 0,0014            | 0,0010                  | 0,0004                  | 0,0001                  |
| 325  | 112.578       | 0,06       | 17,92      | 0,0005            | 0,0000            | 0,0011            | 0,0004                  | 0,0011                  | 0,0000                  |
| 326  | 112.889       | 0,06       | 17,97      | 0,0003            | 0,0003            | 0,0009            | 0,0003                  | 0,0003                  | 0,0002                  |
| 327  | 113.222       | 0,06       | 18,02      | 0,0000            | 0,0000            | 0,0002            | 0,0000                  | 0,0003                  | 0,0001                  |
| 328  | 113.623       | 0,06       | 18,08      | 0,0002            | 0,0000            | 0,0000            | 0,0001                  | 0,0003                  | 0,0001                  |
| 329  | 113.674       | 0,06       | 18,09      | 0,0007            | 0,0000            | 0,0005            | 0,0000                  | 0,0002                  | 0,0000                  |
| 330  | 113.715       | 0,06       | 18,10      | 0,0000            | 0,0000            | 0,0013            | 0,0011                  | 0,0003                  | 0,0000                  |
| 331  | 114.05        | 0,06       | 18,15      | 0,0000            | 0,0000            | 0,0005            | 0,0011                  | 0,0009                  | 0,0000                  |
| 332  | 114.312       | 0,05       | 18,19      | 0,0002            | 0,0000            | 0,0000            | 0,0000                  | 0,0003                  | 0,0000                  |
| 333  | 114.345       | 0,05       | 18,20      | 0,0002            | 0,0000            | 0,0016            | 0,0000                  | 0,0023                  | 0,0000                  |
| 334  | 114.606       | 0,05       | 18,24      | 0,0001            | 0,0000            | 0,0003            | 0,0003                  | 0,0003                  | 0,0000                  |
| 335  | 114.652       | 0,05       | 18,25      | 0,0010            | 0,0000            | 0,0002            | 0,0000                  | 0,0001                  | 0,0000                  |
| 336  | 114.821       | 0,05       | 18,27      | 0,0029            | 0,0000            | 0,0004            | 0,0000                  | 0,0001                  | 0,0003                  |
| 337  | 115.023       | 0,05       | 18,31      | 0,0000            | 0,0001            | 0,0001            | 0,0003                  | 0,0001                  | 0,0000                  |
| 338  | 115.057       | 0,05       | 18,31      | 0,0001            | 0,0003            | 0,0001            | 0,0004                  | 0,0002                  | 0,0000                  |
| 339  | 115.19        | 0,05       | 18,33      | 0,0008            | 0,0002            | 0,0011            | 0,0003                  | 0,0000                  | 0,0002                  |
| 340  | 115.298       | 0,05       | 18,35      | 0,0002            | 0,0005            | 0,0000            | 0,0011                  | 0,0001                  | 0,0011                  |
| 341  | 115.939       | 0,05       | 18,45      | 0,0003            | 0,0000            | 0,0002            | 0,0000                  | 0,0000                  | 0,0000                  |
| 342  | 116.034       | 0,05       | 18,47      | 0,0001            | 0,0001            | 0,0000            | 0,0000                  | 0,0003                  | 0,0000                  |
| 343  | 116.192       | 0,05       | 18,49      | 0,0001            | 0,0000            | 0,0031            | 0,0016                  | 0,0006                  | 0,0000                  |
| 344  | 116.358       | 0,05       | 18,52      | 0,0019            | 0,0000            | 0,0001            | 0,0000                  | 0,0003                  | 0,0001                  |
| 345  | 116.601       | 0,05       | 18,56      | 0,0000            | 0,0007            | 0,0006            | 0,0004                  | 0,0006                  | 0,0002                  |
| 346  | 116.714       | 0,05       | 18,58      | 0,0002            | 0,0000            | 0,0001            | 0,0012                  | 0,0009                  | 0,0003                  |
| 347  | 116.77        | 0,05       | 18,58      | 0,0011            | 0,0001            | 0,0030            | 0,0005                  | 0,0001                  | 0,0000                  |
| 348  | 117.075       | 0,05       | 18,63      | 0,0005            | 0,0000            | 0,0000            | 0,0000                  | 0,0001                  | 0,0000                  |
| 349  | 117.244       | 0,05       | 18,66      | 0,0005            | 0,0000            | 0,0042            | 0,0001                  | 0,0035                  | 0,0000                  |
| 350  | 117.34        | 0,05       | 18,68      | 0,0003            | 0,0001            | 0,0001            | 0,0002                  | 0,0009                  | 0,0000                  |
| 351  | 117.813       | 0,05       | 18,75      | 0,0000            | 0,0000            | 0,0017            | 0,0000                  | 0,0003                  | 0,0000                  |
| 352  | 118.287       | 0,05       | 18,83      | 0,0001            | 0,0003            | 0,0003            | 0,0026                  | 0,0004                  | 0,0007                  |
| 353  | 118.567       | 0,05       | 18,87      | 0,0012            | 0,0001            | 0,0007            | 0,0000                  | 0,0000                  | 0,0000                  |
| 354  | 118.676       | 0,05       | 18,89      | 0,0007            | 0,0006            | 0,0001            | 0,0000                  | 0,0001                  | 0,0008                  |
| 355  | 118.855       | 0,05       | 18,92      | 0,0013            | 0,0001            | 0,0004            | 0,0000                  | 0,0003                  | 0,0003                  |
| 356  | 119.011       | 0,05       | 18,94      | 0,0000            | 0,0001            | 0,0001            | 0,0002                  | 0,0000                  | 0,0000                  |
| 357  | 119.382       | 0,05       | 19,00      | 0,0007            | 0,0000            | 0,0013            | 0,0001                  | 0,0006                  | 0,0000                  |
| 358  | 119.598       | 0,05       | 19,03      | 0,0004            | 0,0001            | 0,0004            | 0,0002                  | 0,0011                  | 0,0000                  |
| 359  | 120.18        | 0,05       | 19,13      | 0,0002            | 0,0001            | 0,0000            | 0,0002                  | 0,0000                  | 0,0000                  |
| 360  | 120.354       | 0,05       | 19,15      | 0,0004            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 361  | 120.528       | 0,05       | 19,18      | 0,0008            | 0,0000            | 0,0000            | 0,0000                  | 0,0001                  | 0,0000                  |
| 362  | 121.173       | 0,05       | 19,29      | 0,0061            | 0,0001            | 0,0000            | 0,0003                  | 0,0004                  | 0,0000                  |
| 363  | 121.179       | 0,05       | 19,29      | 0,0018            | 0,0001            | 0,0001            | 0,0000                  | 0,0000                  | 0,0000                  |
| 364  | 121.844       | 0,05       | 19,39      | 0,0012            | 0,0002            | 0,0000            | 0,0000                  | 0,0000                  | 0,0001                  |
| 365  | 122.034       | 0,05       | 19,42      | 0,0002            | 0,0001            | 0,0002            | 0,0000                  | 0,0003                  | 0,0002                  |
| 366  | 122.258       | 0,05       | 19,46      | 0,0004            | 0,0001            | 0,0002            | 0,0001                  | 0,0003                  | 0,0002                  |
| 367  | 122.508       | 0,05       | 19,50      | 0,0001            | 0,0000            | 0,0000            | 0,0013                  | 0,0002                  | 0,0001                  |
| 368  | 122.979       | 0,05       | 19,57      | 0,0007            | 0,0000            | 0,0000            | 0,0000                  | 0,0022                  | 0,0000                  |
| 369  | 123.126       | 0,05       | 19,60      | 0,0010            | 0,0000            | 0,0024            | 0,0000                  | 0,0003                  | 0,0000                  |
| 370  | 123.418       | 0,05       | 19,64      | 0,0001            | 0,0000            | 0,0004            | 0,0001                  | 0,0002                  | 0,0000                  |
| 371  | 123.595       | 0,05       | 19,67      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0003                  | 0,0001                  |
| 372  | 123.623       | 0,05       | 19,68      | 0,0000            | 0,0001            | 0,0002            | 0,0000                  | 0,0001                  | 0,0000                  |
| 373  | 123.872       | 0,05       | 19,71      | 0,0002            | 0,0000            | 0,0001            | 0,0008                  | 0,0004                  | 0,0000                  |
| 374  | 123.996       | 0,05       | 19,73      | 0,0002            | 0,0000            | 0,0001            | 0,0001                  | 0,0002                  | 0,0001                  |
| 375  | 124.044       | 0,05       | 19,74      | 0,0000            | 0,0004            | 0,0000            | 0,0004                  | 0,0001                  | 0,0000                  |
| 376  | 124.21        | 0,05       | 19,77      | 0,0002            | 0,0000            | 0,0000            | 0,0003                  | 0,0000                  | 0,0002                  |
| 377  | 124.274       | 0,05       | 19,78      | 0,0005            | 0,0000            | 0,0000            | 0,0001                  | 0,0001                  | 0,0002                  |
| 378  | 124.392       | 0,05       | 19,80      | 0,0003            | 0,0003            | 0,0005            | 0,0003                  | 0,0011                  | 0,0008                  |
| 379  | 124.408       | 0,05       | 19,80      | 0,0001            | 0,0002            | 0,0002            | 0,0007                  | 0,0002                  | 0,0000                  |


| Mode | Omega [rad/s] | Period [s] | Freq. [Hz] | $W_{xi}/W_{xtot}$ | $W_{yi}/W_{ytot}$ | $W_{zi}/W_{ztot}$ | $W_{xi\_R}/W_{xtot\_R}$ | $W_{yi\_R}/W_{ytot\_R}$ | $W_{zi\_R}/W_{ztot\_R}$ |
|------|---------------|------------|------------|-------------------|-------------------|-------------------|-------------------------|-------------------------|-------------------------|
| 380  | 124.643       | 0,05       | 19,84      | 0,0002            | 0,0000            | 0,0003            | 0,0000                  | 0,0002                  | 0,0000                  |
| 381  | 124.777       | 0,05       | 19,86      | 0,0001            | 0,0000            | 0,0000            | 0,0004                  | 0,0001                  | 0,0000                  |
| 382  | 125.002       | 0,05       | 19,89      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 383  | 125.128       | 0,05       | 19,91      | 0,0000            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 384  | 125.148       | 0,05       | 19,92      | 0,0002            | 0,0000            | 0,0001            | 0,0000                  | 0,0001                  | 0,0000                  |
| 385  | 125.23        | 0,05       | 19,93      | 0,0002            | 0,0003            | 0,0002            | 0,0002                  | 0,0002                  | 0,0002                  |
| 386  | 125.33        | 0,05       | 19,95      | 0,0002            | 0,0000            | 0,0005            | 0,0002                  | 0,0002                  | 0,0000                  |
| 387  | 125.498       | 0,05       | 19,97      | 0,0000            | 0,0000            | 0,0000            | 0,0001                  | 0,0000                  | 0,0000                  |
| 388  | 125.523       | 0,05       | 19,98      | 0,0001            | 0,0000            | 0,0004            | 0,0001                  | 0,0002                  | 0,0000                  |
| 389  | 125.759       | 0,05       | 20,02      | 0,0004            | 0,0000            | 0,0001            | 0,0000                  | 0,0000                  | 0,0000                  |
| 390  | 125.895       | 0,05       | 20,04      | 0,0001            | 0,0000            | 0,0000            | 0,0000                  | 0,0000                  | 0,0000                  |
| 391  | 126.024       | 0,05       | 20,06      | 0,0004            | 0,0009            | 0,0004            | 0,0013                  | 0,0001                  | 0,0003                  |
| 392  | 126.396       | 0,05       | 20,12      | 0,0020            | 0,0001            | 0,0001            | 0,0002                  | 0,0020                  | 0,0000                  |
| 393  | 126.697       | 0,05       | 20,16      | 0,0000            | 0,0003            | 0,0005            | 0,0002                  | 0,0002                  | 0,0004                  |
| 394  | 126.724       | 0,05       | 20,17      | 0,0000            | 0,0002            | 0,0000            | 0,0001                  | 0,0001                  | 0,0007                  |
| 395  | 127.096       | 0,05       | 20,23      | 0,0001            | 0,0003            | 0,0000            | 0,0009                  | 0,0000                  | 0,0000                  |
| 396  | 127.327       | 0,05       | 20,26      | 0,0004            | 0,0002            | 0,0000            | 0,0000                  | 0,0000                  | 0,0004                  |
| 397  | 127.487       | 0,05       | 20,29      | 0,0001            | 0,0000            | 0,0002            | 0,0000                  | 0,0008                  | 0,0000                  |
| 398  | 127.541       | 0,05       | 20,30      | 0,0004            | 0,0000            | 0,0000            | 0,0000                  | 0,0001                  | 0,0000                  |
| 399  | 127.575       | 0,05       | 20,30      | 0,0003            | 0,0000            | 0,0003            | 0,0000                  | 0,0004                  | 0,0000                  |
| 400  | 127.891       | 0,05       | 20,35      | 0,0002            | 0,0001            | 0,0000            | 0,0001                  | 0,0000                  | 0,0001                  |
|      |               |            |            | 0,8945            | 0,9334            | 0,4828            | 0,5447                  | 0,4418                  | 0,9349                  |

Tablica 7: Prikaz perioda, frekvencija i aktiviranih masa za prvih 400 modova


U prvih 400 modova se aktiviralo preko 89% mase u smjeru x i preko 93% mase u smjeru y.

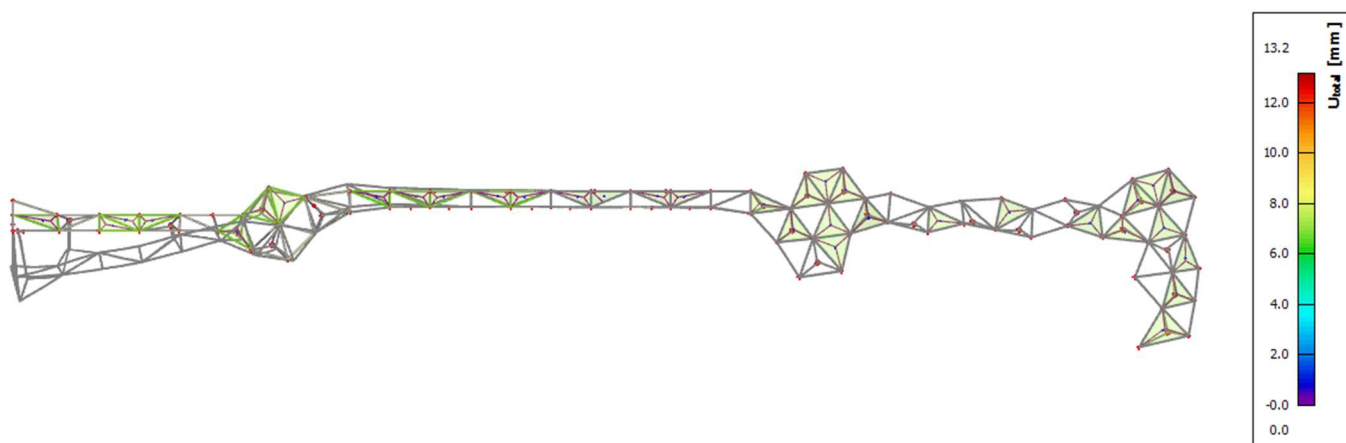


Slika 31: Prikaz 1. vlastitog vektora - torzija - smjeru (tlocrt)

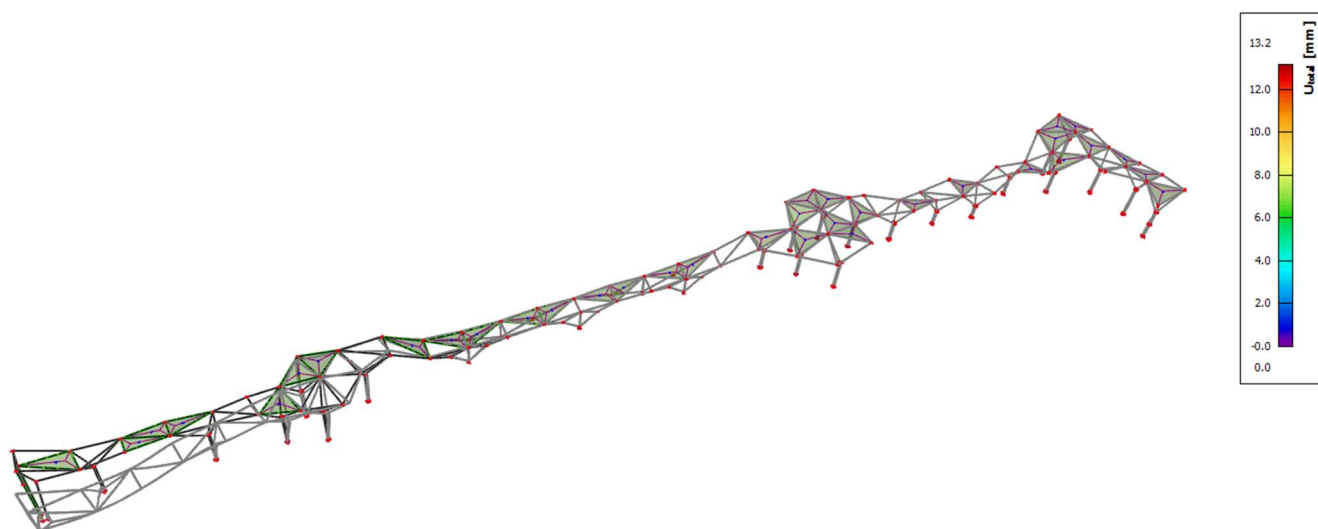


Slika 32: Prikaz 1. vlastitog vektora - torzija - smjeru (aksonometrija)

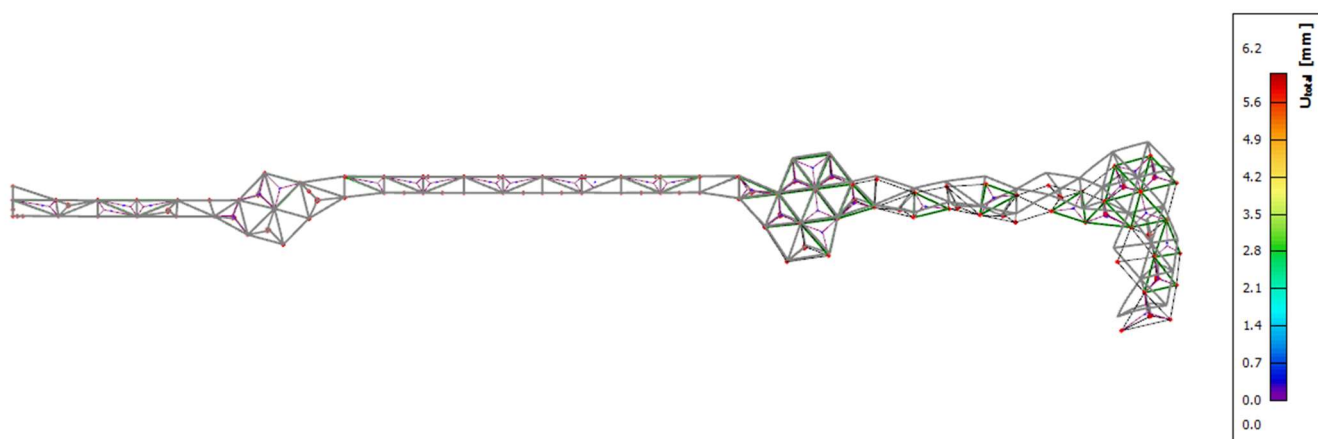


Slika 33: Prikaz 5. vlastitog vektora – translacija y (tlocrt)

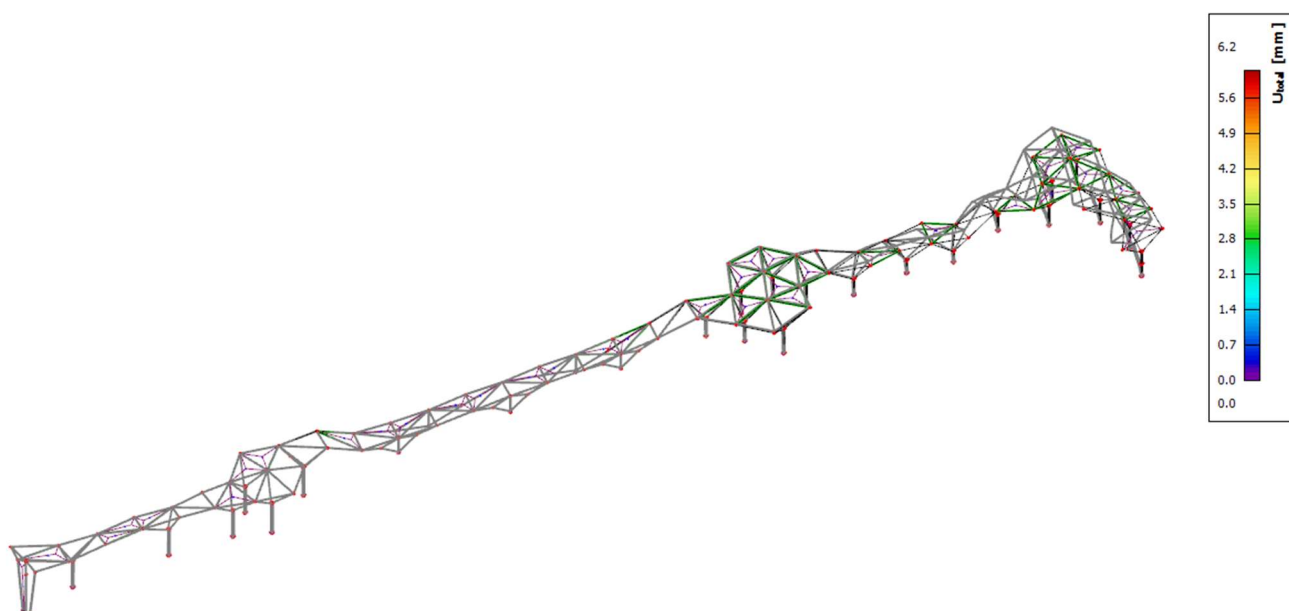

Slika 34: Prikaz 5. vlastitog vektora – translacija y (aksonometrija)

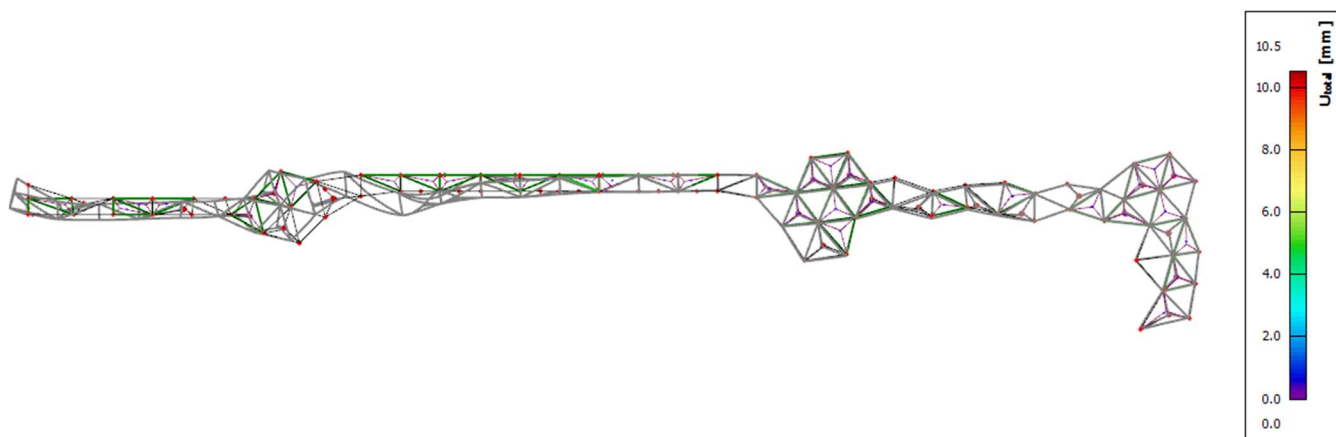

Slika 35: Prikaz 7. vlastitog vektora – translacija u  $x$  - smjeru (tlocrt)

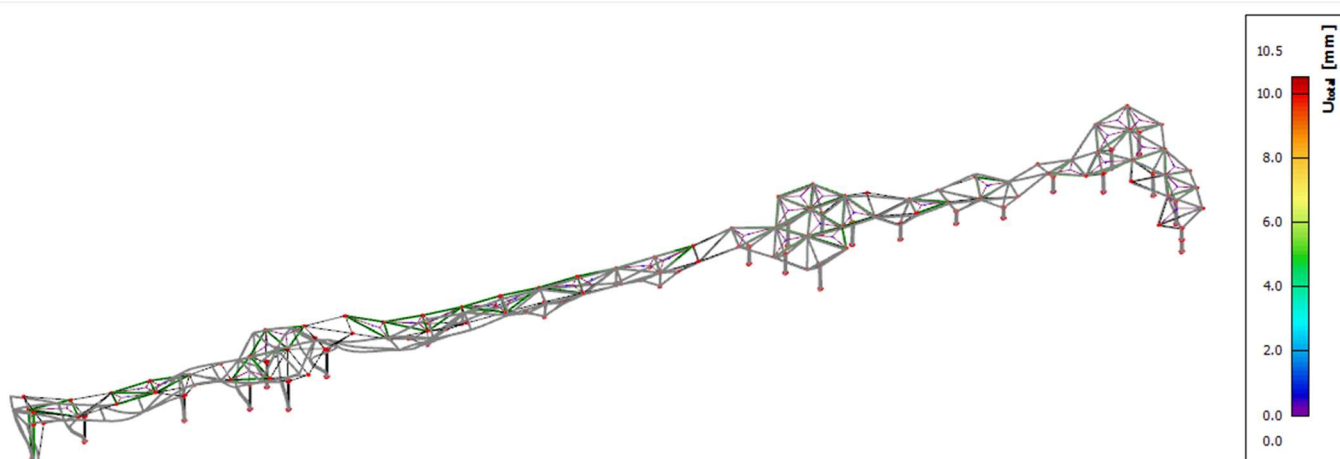

Slika 36: Prikaz 7. vlastitog vektora – translacija u  $x$  - smjeru (aksonometrija)

Za kontrolu pomaka konstrukcije uslijed seizmičkih sila (granično stanje uporabljivosti) koristi se ubrzanje tla  $a_g$  za povratni period  $T=95$ god.


Zagreb – Shopping centar „King Cross“ se nalazi u potresnoj zoni za koju je definirano  $a_g=0,13$  g za povratni period  $T=95$  god.

Za proračun seizmičkog utjecaja za GSU uzima se faktor ponašanja konstrukcije  $q=1.0$ .


U sljedećoj tablici su prikazani parametri uzeti za seizmičku analizu objekta:

Tablica 8: Parametri za seizmički proračun za GSU

|   |            |
|---|------------|
| coeff accel. $a_g$                              | 0,130      |
| $a_g$ - design acceleration [m/s <sup>2</sup> ] | 1,275      |
| q - behaviour factor                            | 1,000      |
| beta  | 0,200      |
| S, $T_b$ , $T_c$ , $T_d$ manually?              | No         |
| Subsoil type                                    | C          |
| Spectrum type                                   | type 1     |
| Direction                                       | Horizontal |
| Direction factor                                | 1          |
| S - soil factor                                 | 1,150      |
| $T_b$   | 0,200      |
| $T_c$   | 0,600      |
| $T_d$   | 2,000      |

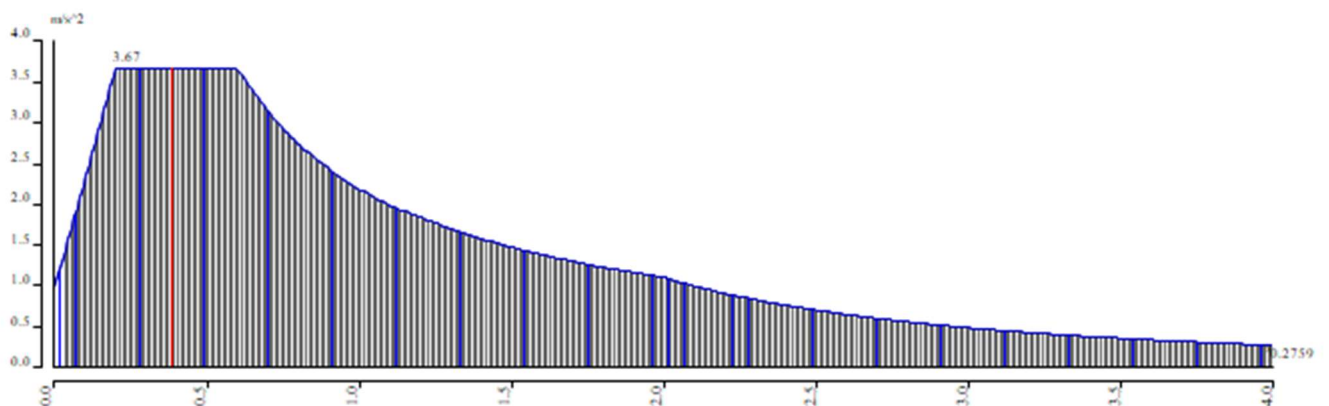

Slika 37: Prikaz elastičnog spektra odziva

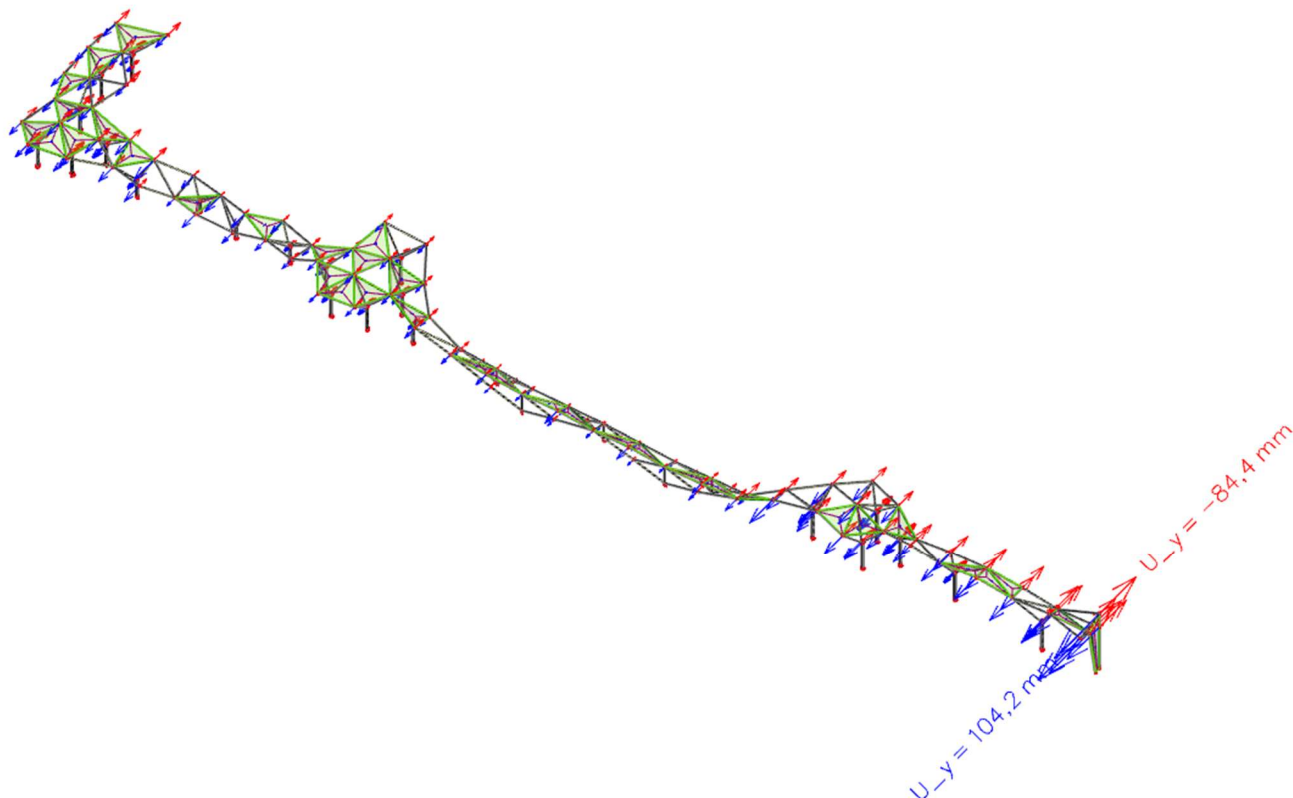


Slika 38: Pomaci  $u_y$  od kombinacije  $GSU S_y$  - globalni maksimum

Maksimalni pomak:  $u_x=104.2$  mm

Dopušteni pomak:  $H/150=16000/150=106.67$  mm  $\geq 104.2$  mm

**Zadovoljava!**

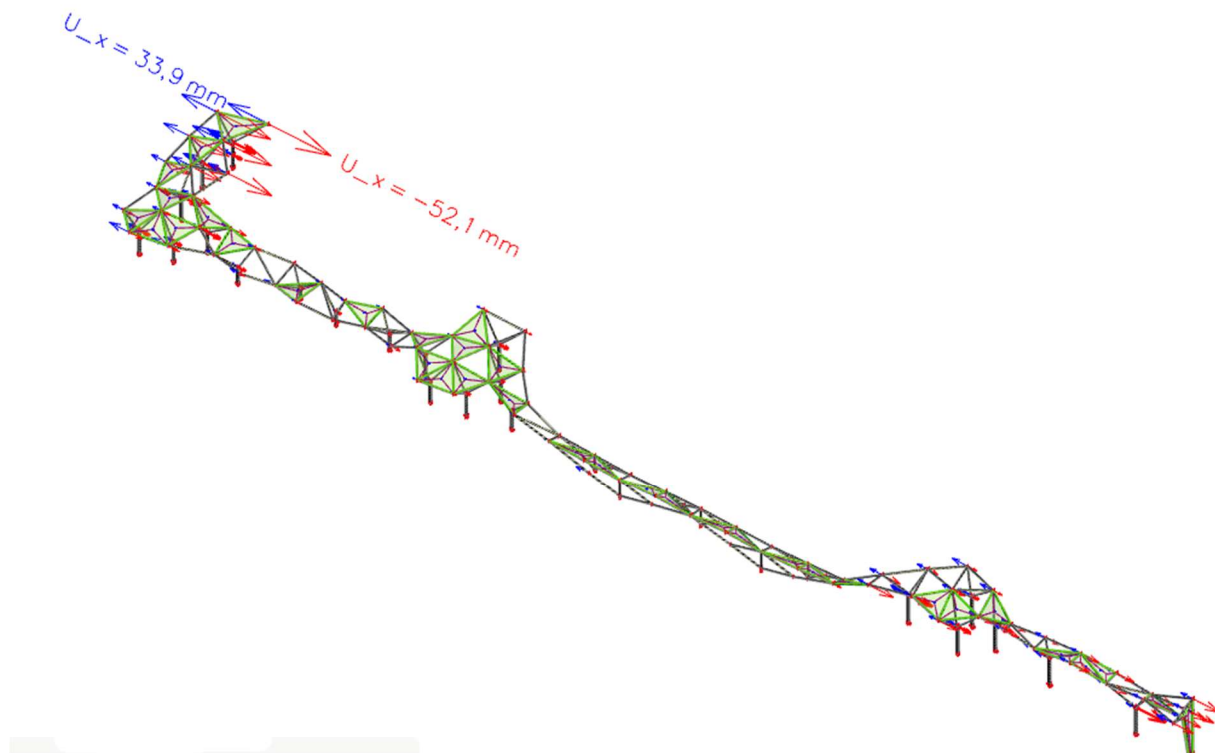

Slika 39: Pomaci  $u_x$  od kombinacije GSU Sx - globalni maksimum

Maksimalni pomak:  $u_x=52.1$  mm


Dopušteni pomak:  $H/150=14000/150=93.33$  mm  $\geq 52.1$  mm

**Zadovoljava!**




## 4. Dimenzioniranje konstrukcijskih elemenata


### 4.1. Pokrovni elementi – „PK“

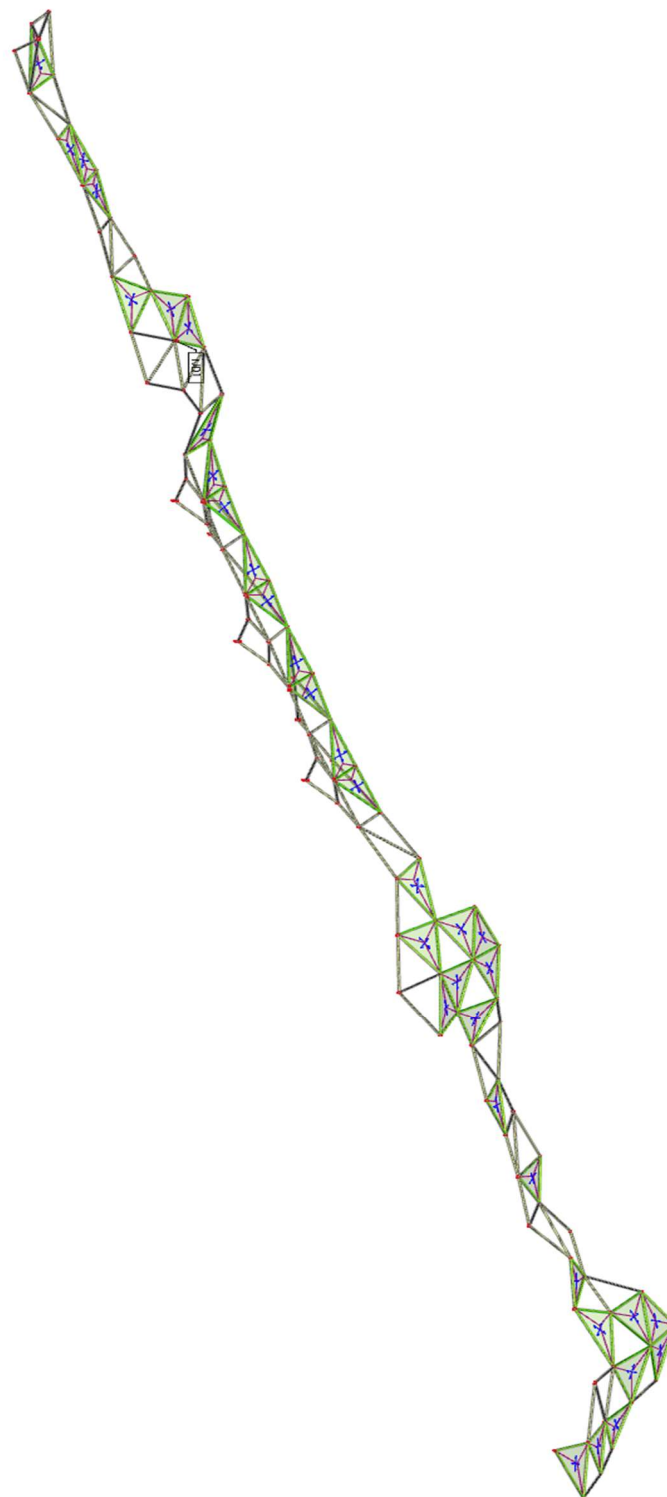


Slika 40: Prikaz pokrovnih elemenata konstrukcije „PK“

## 4.1.1. Rezne sile pokrovnih elemenata

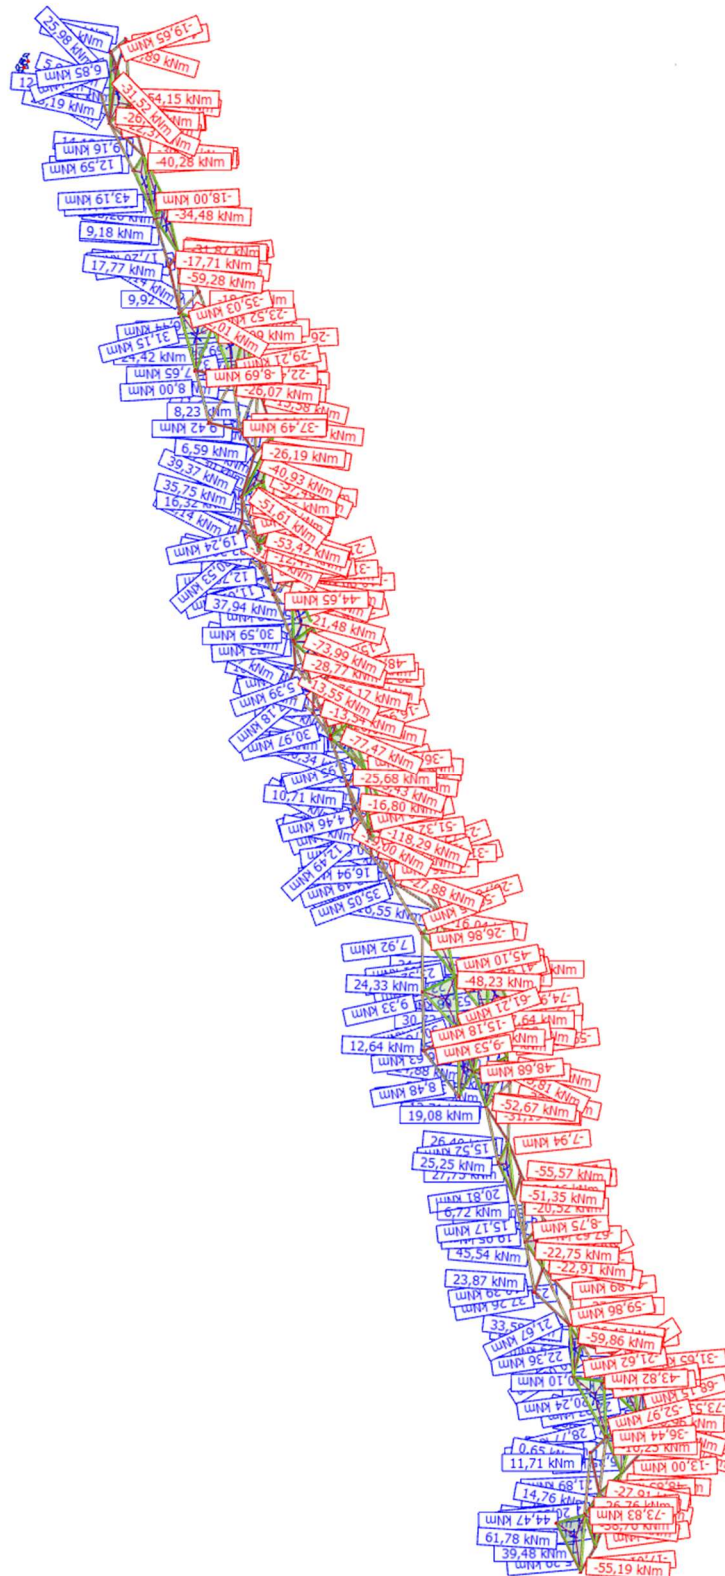
Slika 41: Moment savijanja  $M_y$  (kNm)- pokrovni nosači „PK“

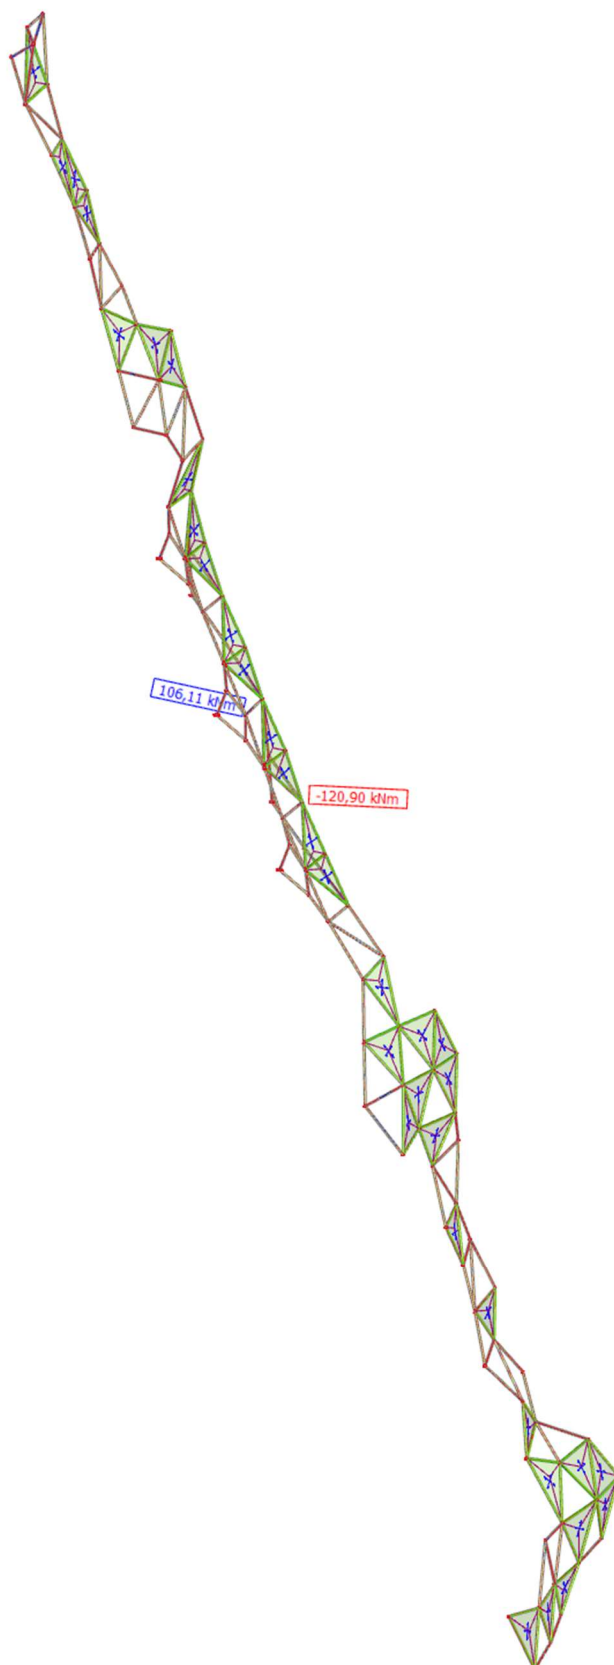


Slika 42: Moment savijanja  $M_y$  (kNm) - pokrovni nosači „PK“

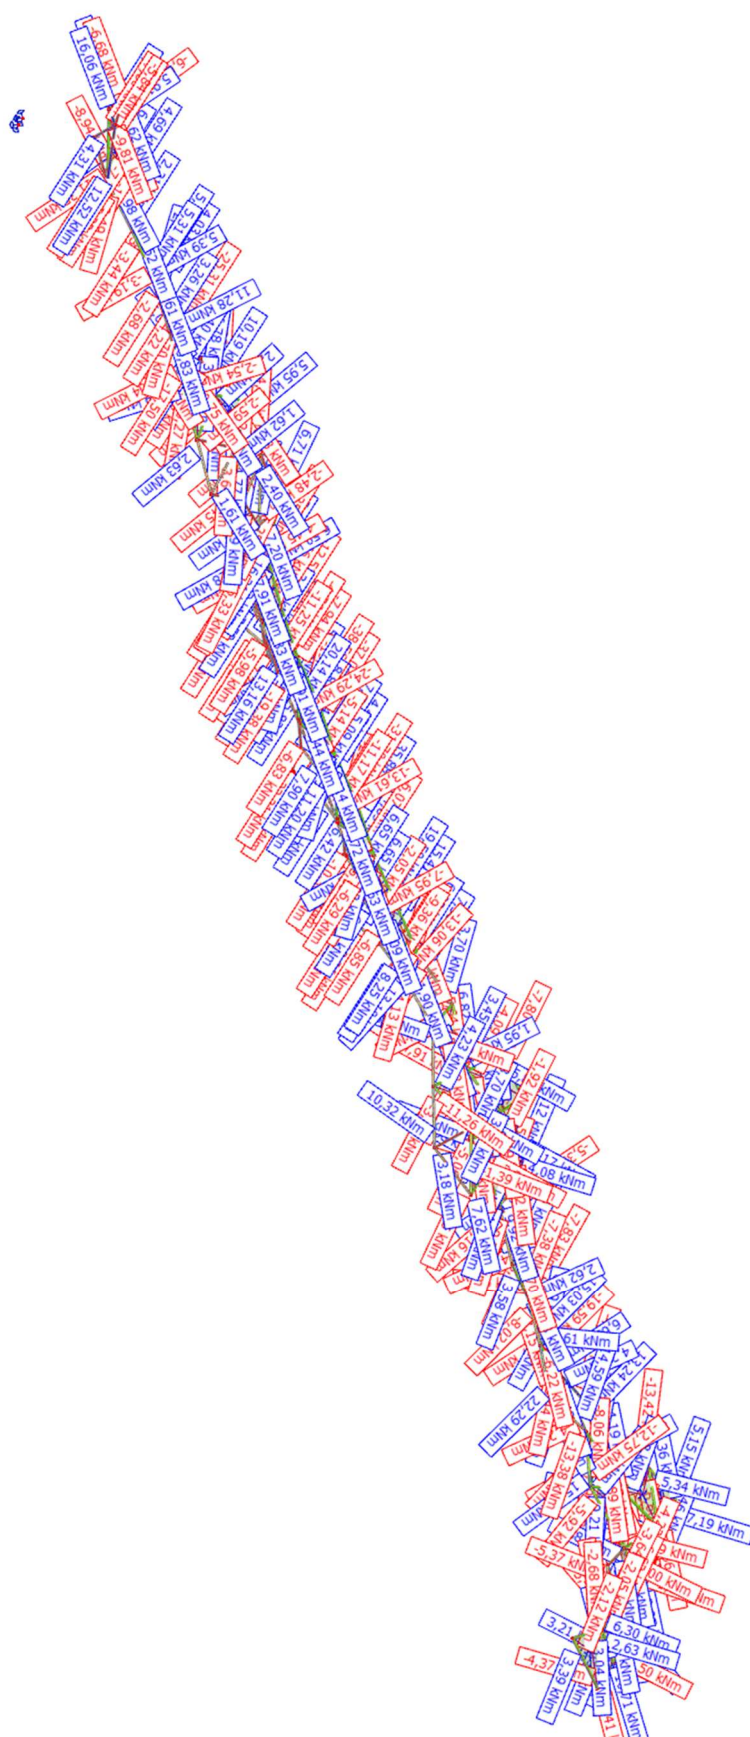


Slika 43: Moment savijanja  $M_z$  (kNm)- pokrovni nosači „PK“

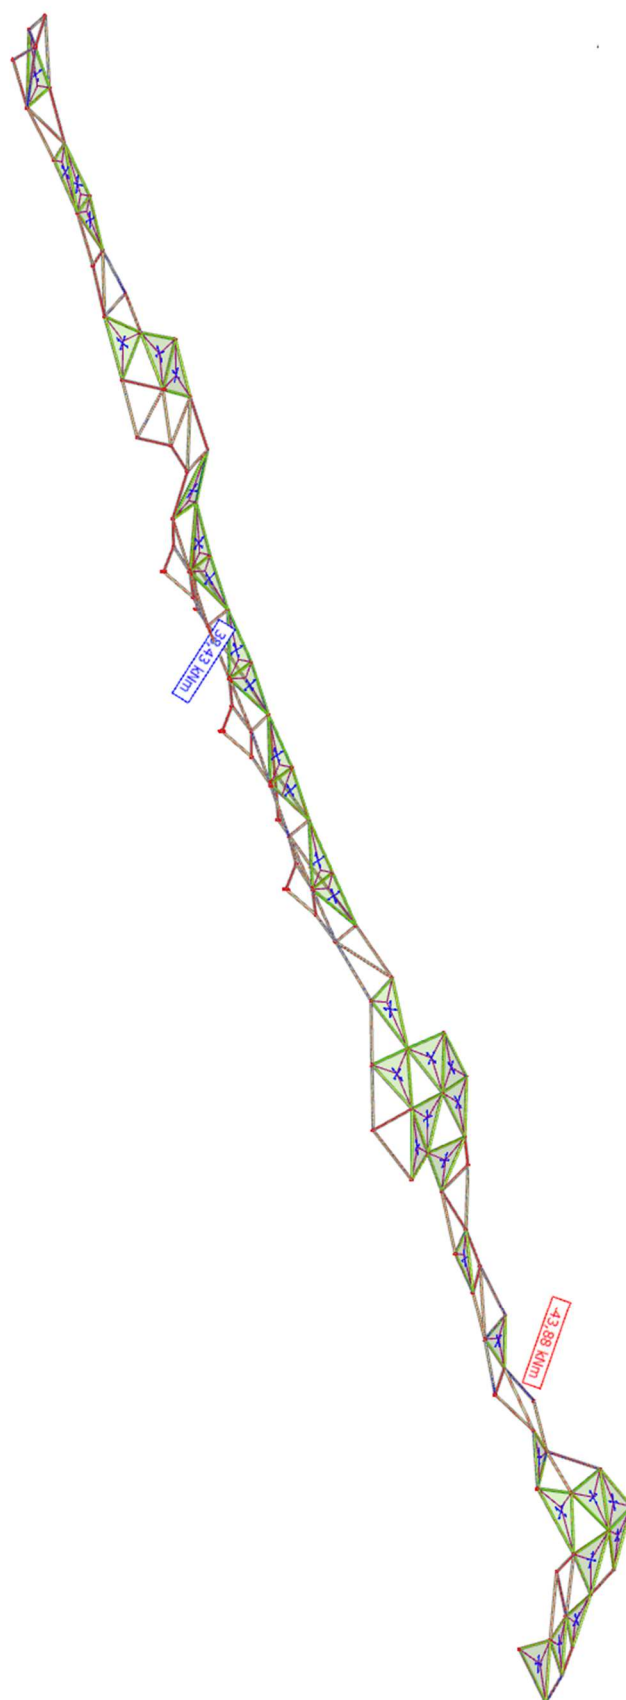

Slika 44: Moment savijanja  $M_z$ (kNm)- pokrovni nosači „PK“

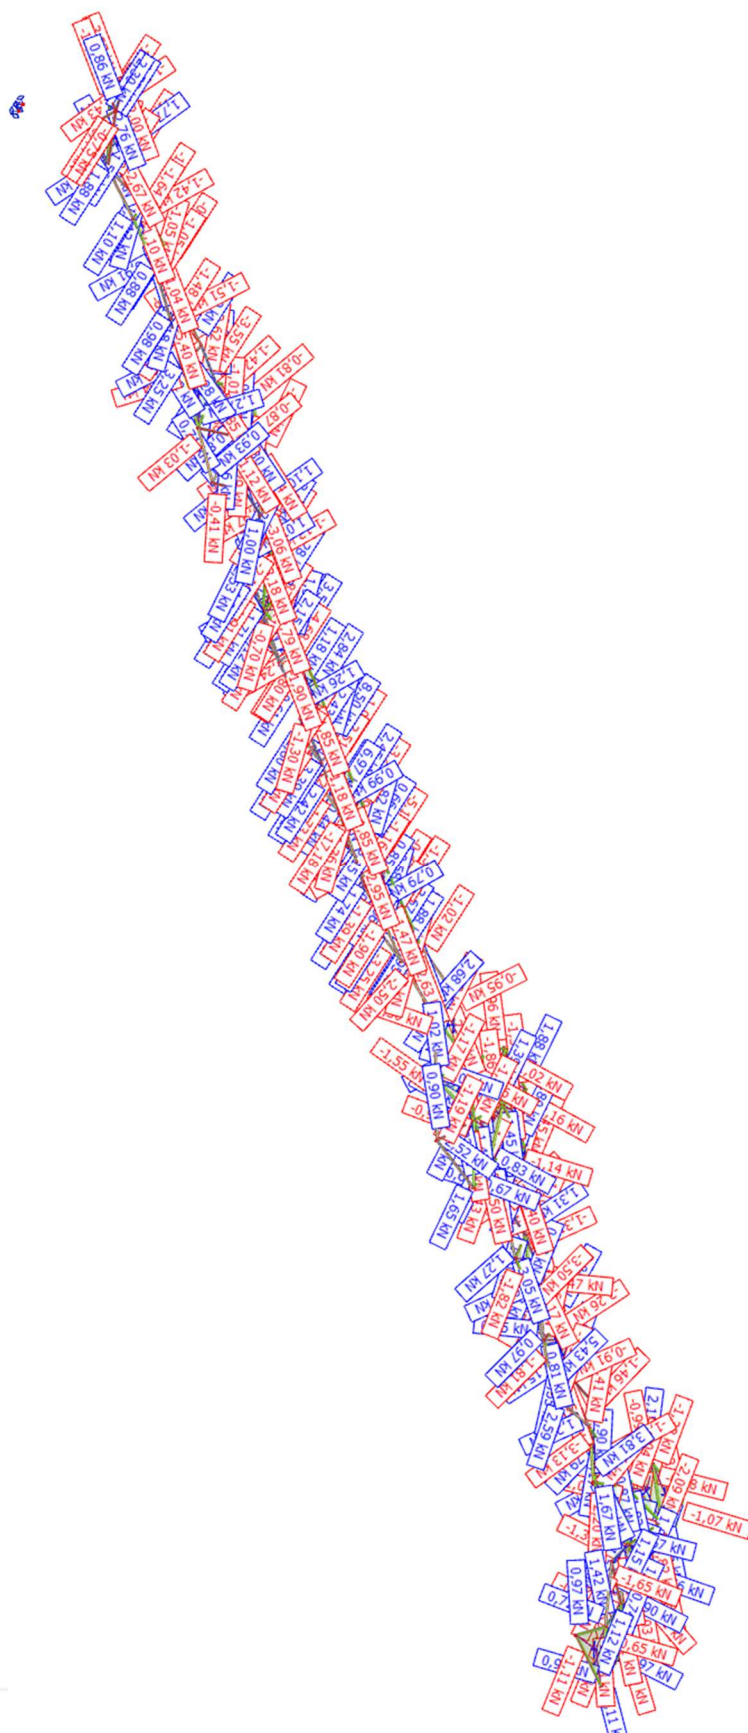


Slika 45: Poprečna sila  $V_Y$ (kN)- pokrovni nosači „PK“

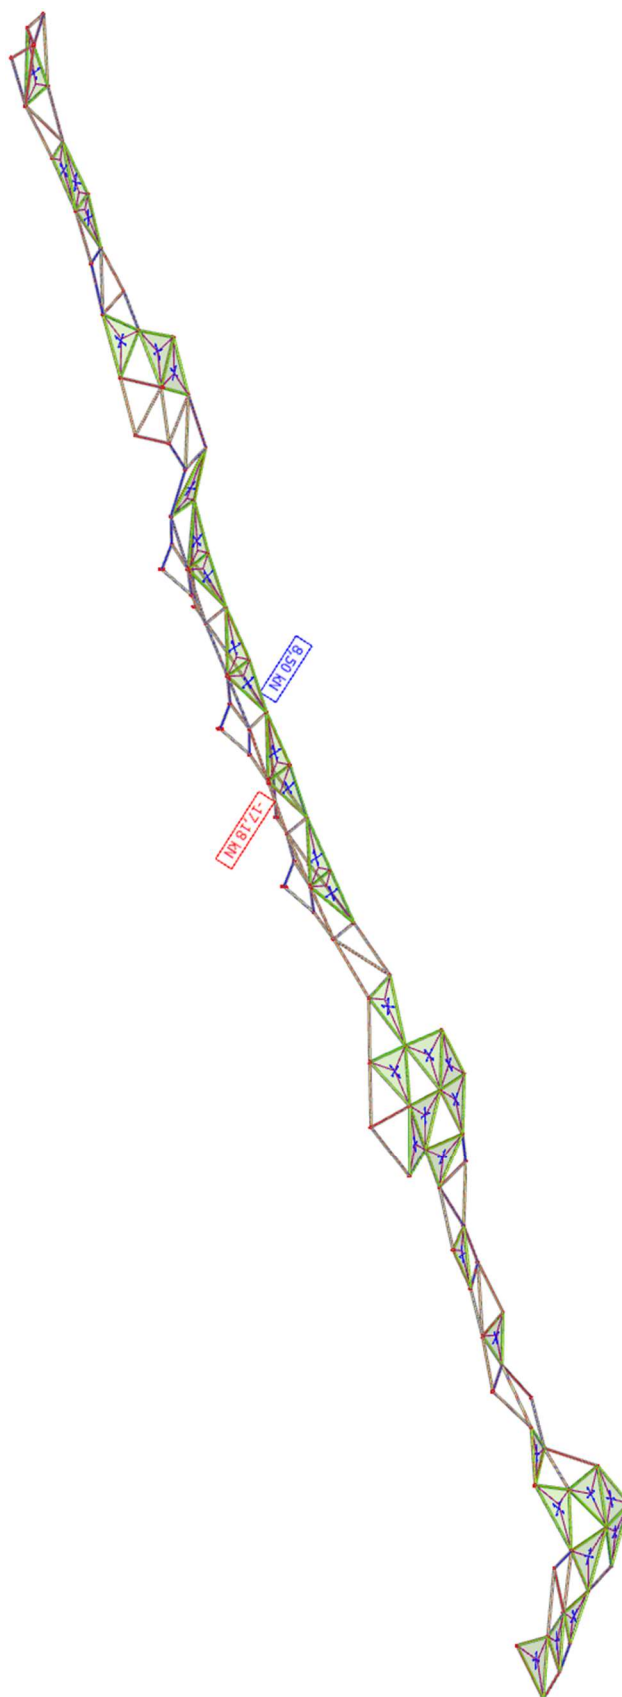


Slika 46: Poprečna sila  $V_Y$ (kN)- pokrovni nosači „PK“



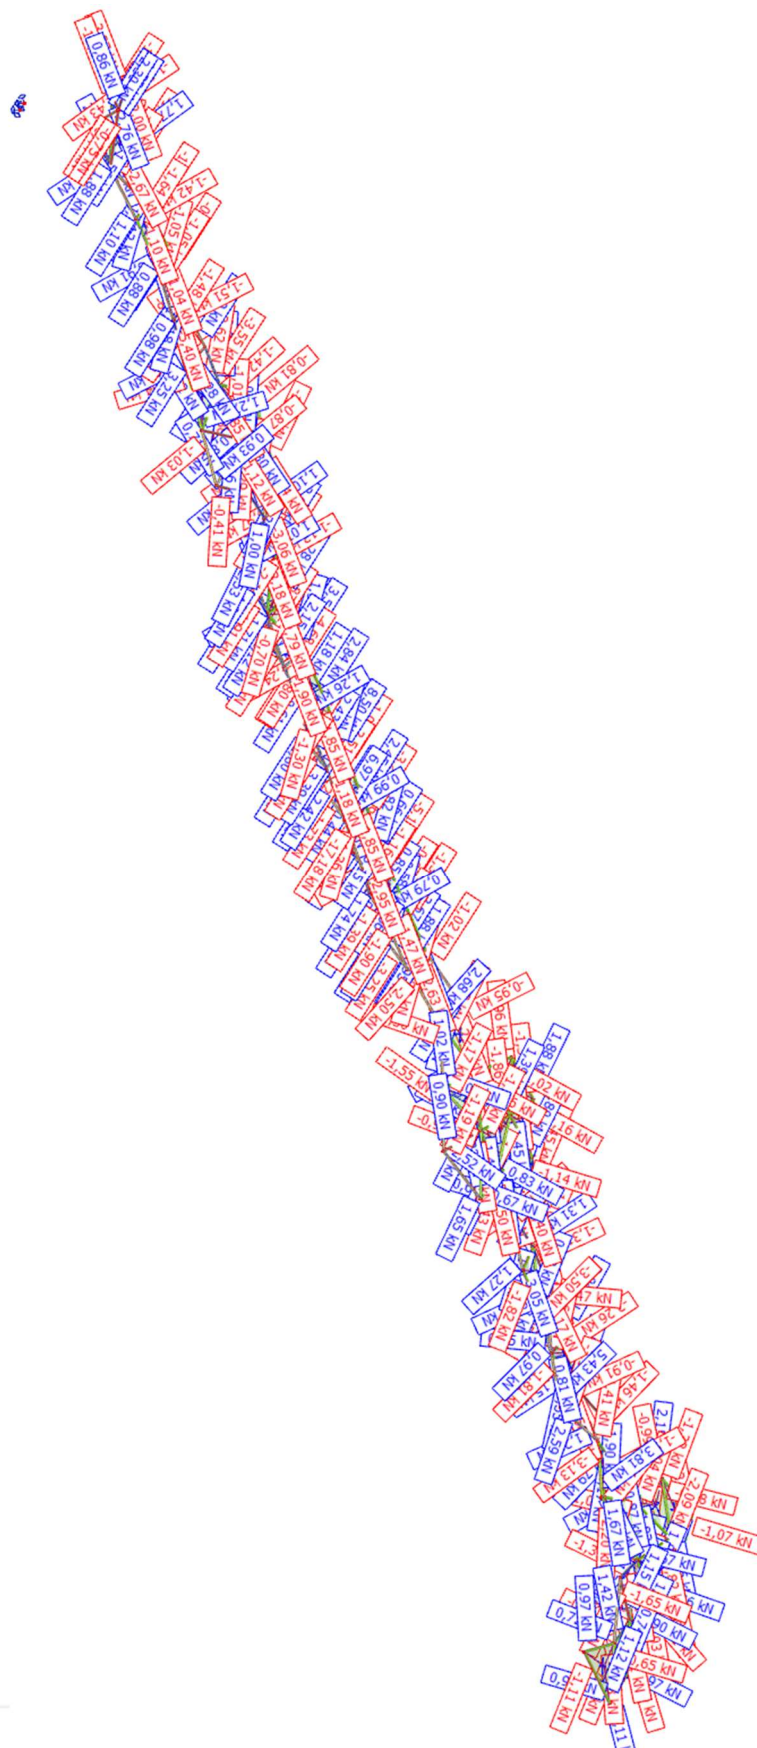


Slika 47: Poprečna sila  $V_z$ (kN)- pokrovni nosači „PK“



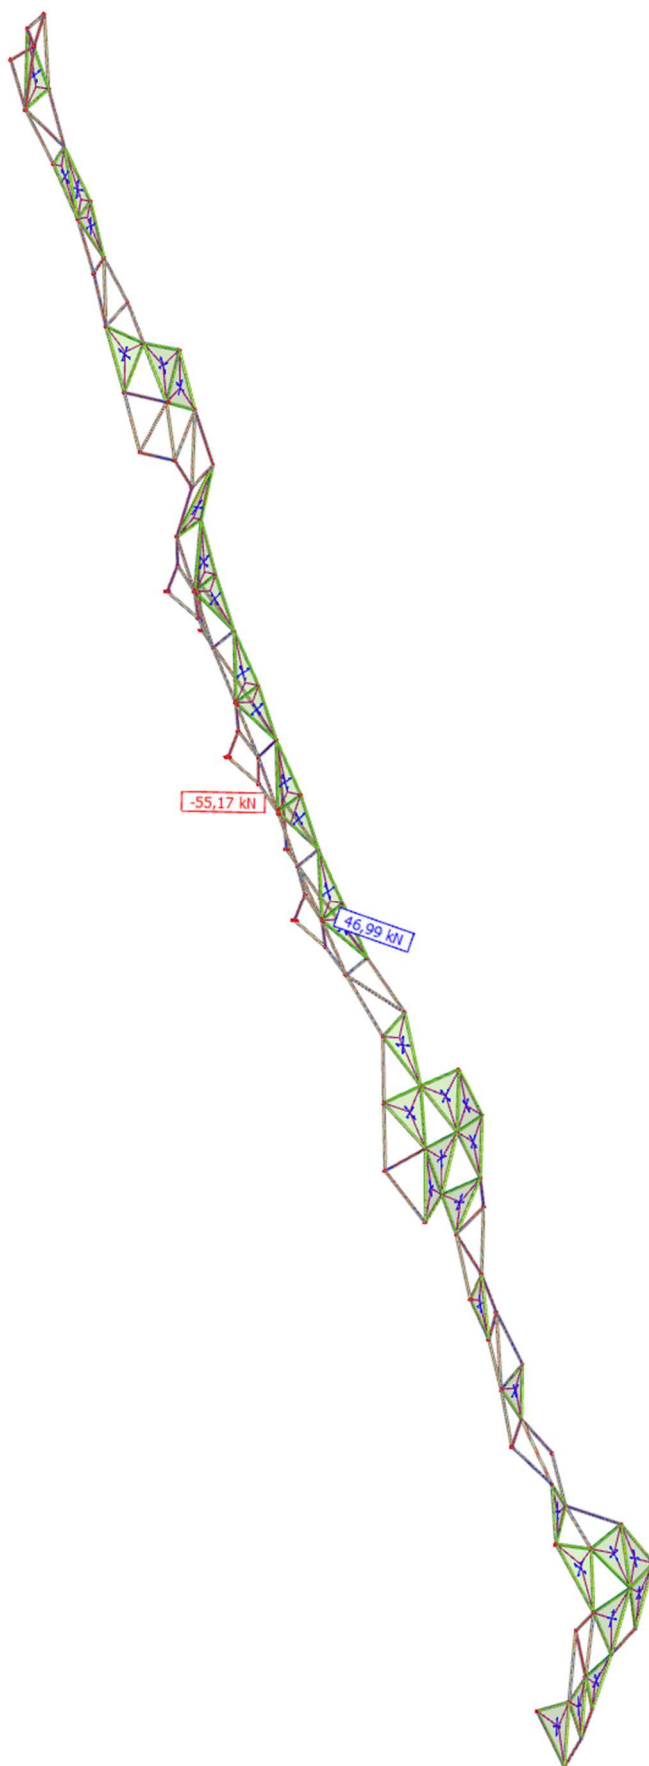


ž

Slika 48: Poprečna sila  $V_z$ (kN)- pokrovni nosači „PK“

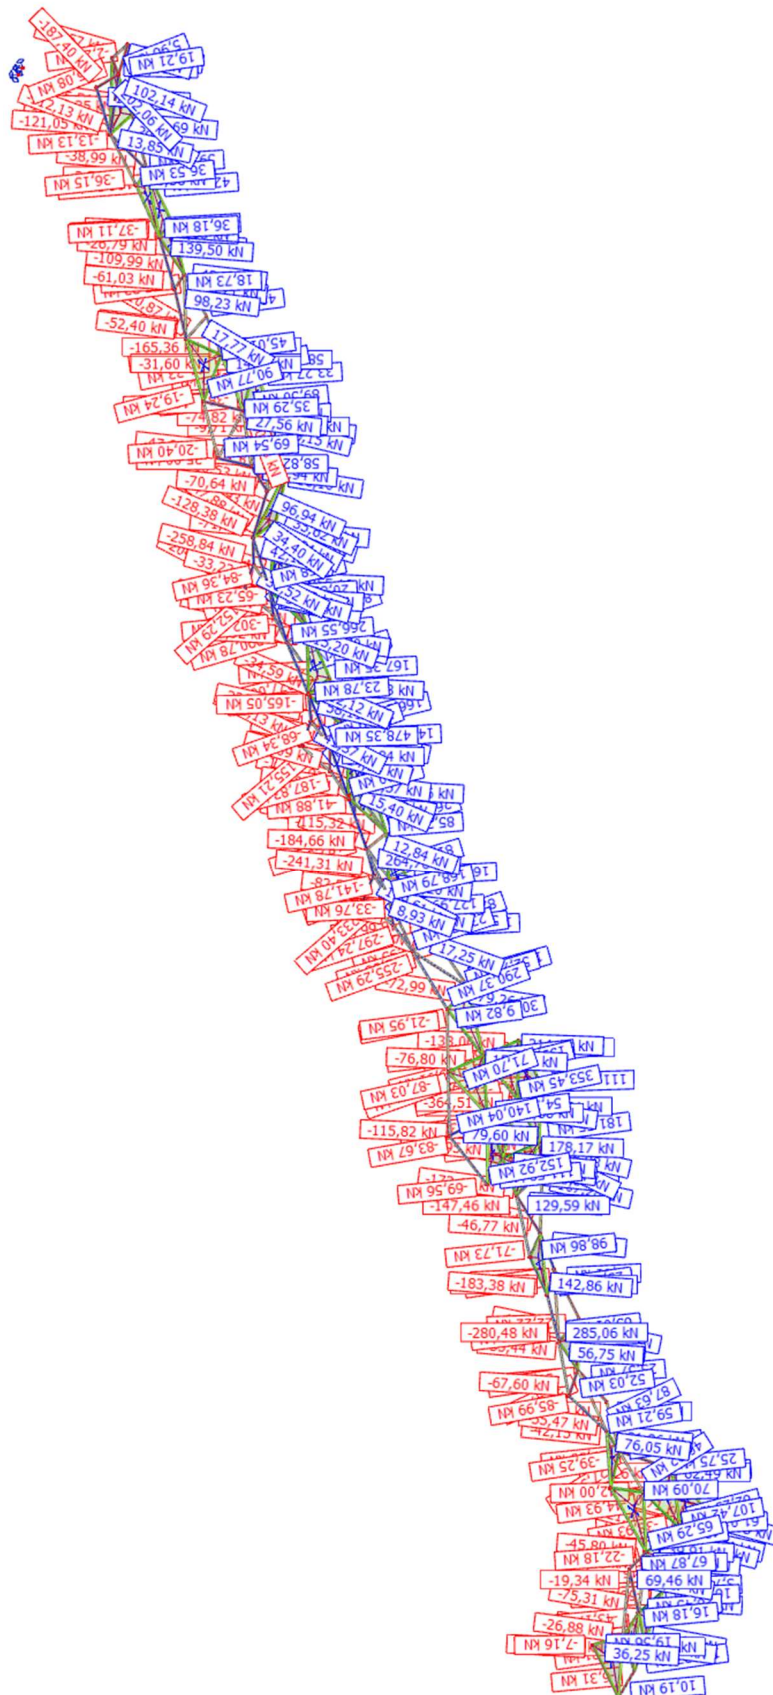


Slika 49: Uzdužna sila  $N(kN)$ - pokrovni nosači „PK“

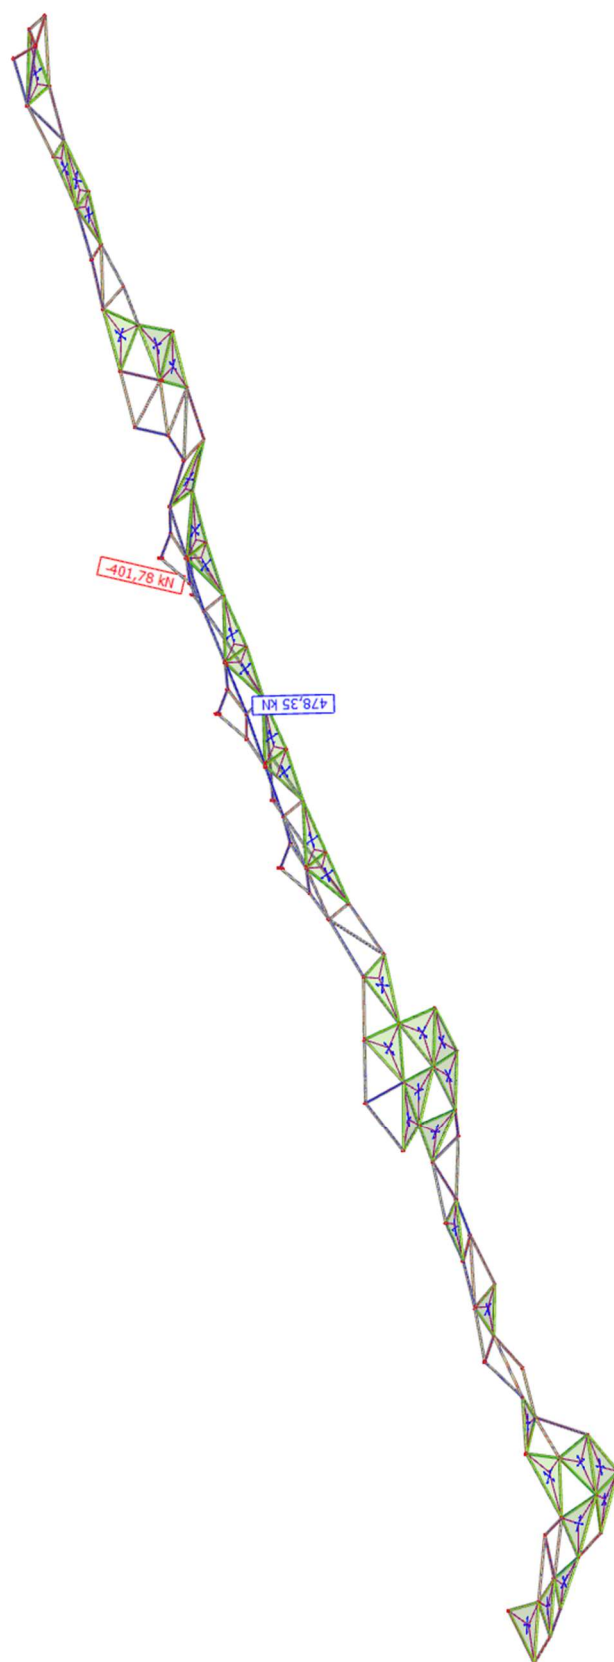


Slika 50: Uzdužna sila  $N(kN)$ - pokrovni nosači „PK“

#### 4.1.2. Dimenzioniranje pokrovnih nosača

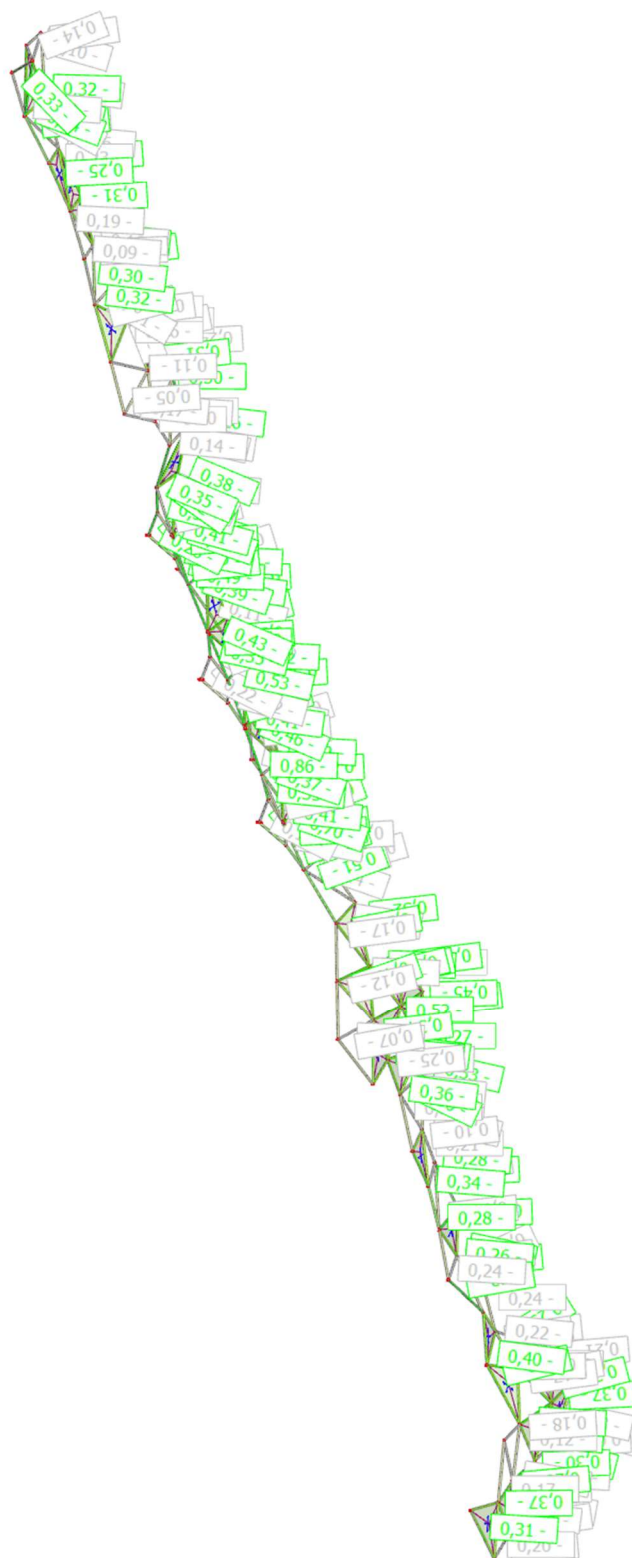

Slika 51: Prikaz iskoristivosti pokrovnih nosača „PK“

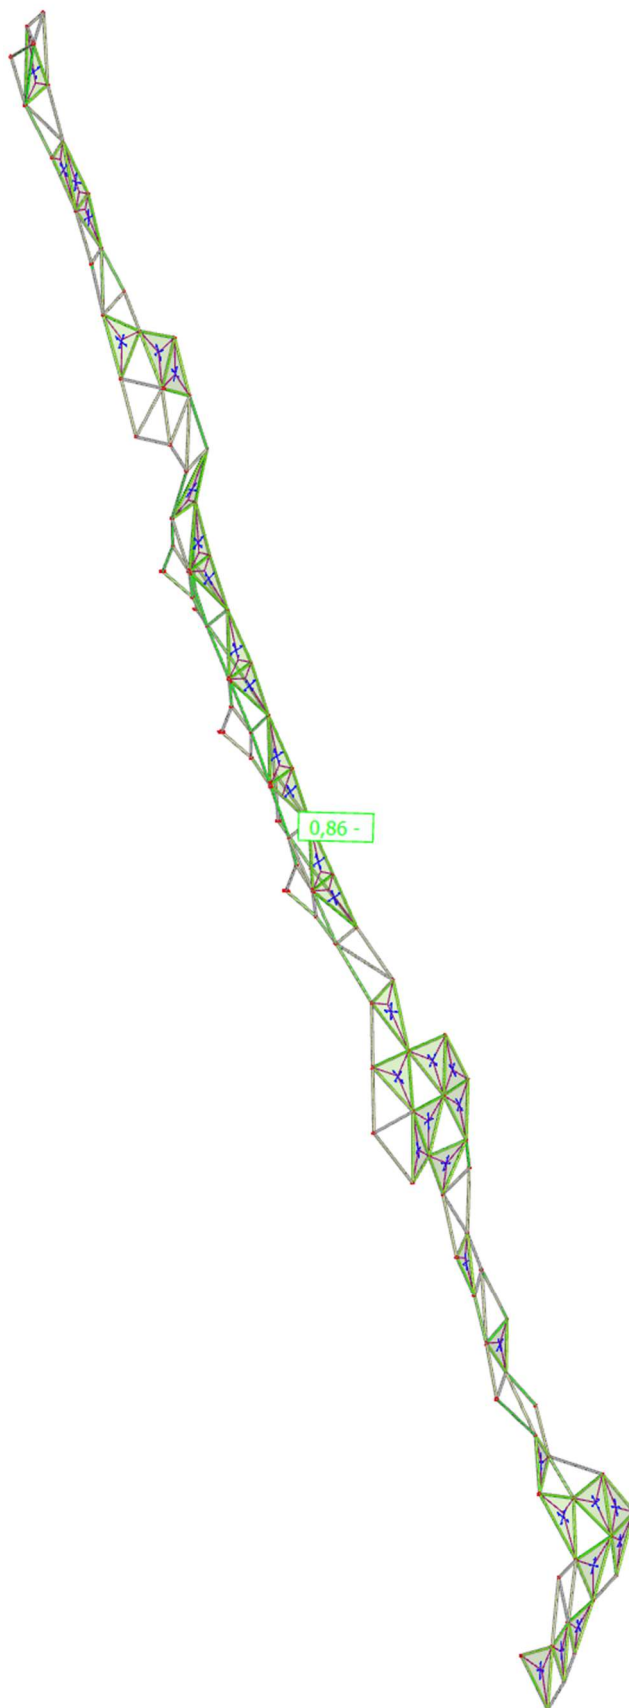

*Slika 52: Prikaz iskoristivosti pokrovnih nosača „PK“*

**EC-EN 1993 Steel check ULS**

Linear calculation  
 Combination: ULS-Set B (auto)  
 Coordinate system: Principal  
 Extreme 1D: Global  
 Selection: All

**EN 1993-1-1 Code Check**

National annex: Standard EN

|                     |                          |                   |                    |              |                         |               |
|---------------------|--------------------------|-------------------|--------------------|--------------|-------------------------|---------------|
| <b>Member B5563</b> | <b>18,188 / 18,188 m</b> | <b>CFCHS273X8</b> | <b>Cold formed</b> | <b>S 355</b> | <b>ULS-Set B (auto)</b> | <b>0,86 -</b> |
|---------------------|--------------------------|-------------------|--------------------|--------------|-------------------------|---------------|

Note: EN 1993-1-3 article 1.1(3) specifies that this part does not apply to cold formed CHS and RHS sections. The default EN 1993-1-1 code check is executed instead of the EN 1993-1-3 code check.

| Combination key   |
|---|
| ULS-Set B (auto) / G + dg + 1.50*T+ + 0.90*w3(odizanje) |

| Partial safety factors       |               |      |  |
|------------------------------|---------------|------|--|
| Resistance of cross-sections | $\gamma_{M0}$ | 1,00 |  |
| Resistance to instability    | $\gamma_{M1}$ | 1,10 |  |
| Resistance of net sections   | $\gamma_{M2}$ | 1,25 |  |

| Material          |       |       |     |
|-------------------|-------|-------|-----|
| Yield strength    | $f_y$ | 355,0 | MPa |
| Ultimate strength | $f_u$ | 490,0 | MPa |

....:SECTION CHECK:....

The critical check is on position 18,188 m

| Internal forces |            | Calculated | Unit |
|-----------------|------------|------------|------|
| Normal force    | $N_{Ed}$   | -184,66    | kN   |
| Shear force     | $V_{y,Ed}$ | 0,61       | kN   |
| Shear force     | $V_{z,Ed}$ | -4,50      | kN   |
| Torsion         | $T_{Ed}$   | 11,16      | kNm  |
| Bending moment  | $M_{y,Ed}$ | -14,03     | kNm  |
| Bending moment  | $M_{z,Ed}$ | 3,42       | kNm  |

**Classification for cross-section design**

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d [mm] | t [mm] | d/t [-] | Class 1 Limit [-] | Class 2 Limit [-] | Class 3 Limit [-] | Class |
|--------|--------|---------|-------------------|-------------------|-------------------|-------|
| 273    | 8      | 34,1    | 33,1              | 46,3              | 59,6              | 2     |

The cross-section is classified as Class 2

**Compression check**

According to EN 1993-1-1 article 6.2.4 and formula (6.9)

|                        |            |            |                |
|------------------------|------------|------------|----------------|
| Cross-section area     | A          | 6,6600e-03 | m <sup>2</sup> |
| Compression resistance | $N_{c,Rd}$ | 2364,30    | kN             |
| Unity check            |            | 0,08       | -              |

$$N_{c,Rd} = \frac{A \times f_y}{\gamma_{M0}} = \frac{6,6600 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,00} = 2364,30 [kN]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{c,Rd}} = \frac{|-184,66 [kN]|}{2364,30 [kN]} = 0,08 \leq 1,00$$

**Bending moment check for  $M_y$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,y}$    | 5,6197e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,y,Rd}$ | 199,50     | kNm            |
| Unity check             |               | 0,07       | -              |

$$M_{pl,y,Rd} = \frac{W_{pl,y} \times f_y}{\gamma_{M0}} = \frac{5,6197 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 199,50 [kNm]$$

$$\text{Unity check} = \frac{|M_{y,Ed}|}{M_{pl,y,Rd}} = \frac{|-14,03 [kNm]|}{199,50 [kNm]} = 0,07 \leq 1,00$$

**Bending moment check for  $M_z$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,z}$    | 5,6197e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,z,Rd}$ | 199,50     | kNm            |
| Unity check             |               | 0,02       | -              |

$$M_{pl,z,Rd} = \frac{W_{pl,z} \times f_y}{\gamma_{M0}} = \frac{5,6197 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 199,50 [kNm]$$

$$\text{Unity check} = \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = \frac{|3,42 [kNm]|}{199,50 [kNm]} = 0,02 \leq 1,00$$

**Shear check for  $V_y$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 4,2399e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_y$ | $V_{pl,y,Rd}$ | 869,00     | kN             |
| Unity check                        |               | 0,00       | -              |

$$V_{pl,y,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{4,2399 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 869,00 [kN]$$

$$\text{Unity check} = \frac{|V_{y,Ed}|}{V_{c,y,Rd}} = \frac{|0,61 [kN]|}{869,00 [kN]} = 0,00 \leq 1,00$$

**Shear check for  $V_z$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 4,2399e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_z$ | $V_{pl,z,Rd}$ | 869,00     | kN             |
| Unity check                        |               | 0,01       | -              |

$$V_{pl,z,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{4,2399 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 869,00 [kN]$$

$$\text{Unity check} = \frac{|V_{z,Ed}|}{V_{c,z,Rd}} = \frac{|-4,50 [kN]|}{869,00 [kN]} = 0,01 \leq 1,00$$

**Torsion check**

According to EN 1993-1-1 article 6.2.7 and formula (6.23)

|                          |          |       |     |
|--------------------------|----------|-------|-----|
| Index of fibre           | Fibre    | 1     |     |
| Total torsional moment   | $T_{Ed}$ | 12,6  | MPa |
| Elastic shear resistance | $T_{Rd}$ | 205,0 | MPa |
| Unity check              |          | 0,06  | -   |

$$\tau_{Ed} = \left| \frac{T_{Ed}}{T_{Ed,unit}} \times \tau_{Ed,unit} \right| = \left| \frac{11,16[\text{kNm}]}{1,00[\text{kNm}]} \times 1133,179[\text{kN/m}^2] \right| = 12,6[\text{MPa}]$$

$$\tau_{Rd} = \frac{f_y}{\sqrt{3} \times \gamma_{M0}} = \frac{355,0[\text{MPa}]}{\sqrt{3} \times 1,00} = 205,0[\text{MPa}]$$

$$\text{Unity check} = \frac{\tau_{Ed}}{\tau_{Rd}} = \frac{12,6[\text{MPa}]}{205,0[\text{MPa}]} = \mathbf{0,06} \leq \mathbf{1,00}$$

**Combined Shear and Torsion check for  $V_y$  and  $\tau_{t,Ed}$** 

According to EN 1993-1-1 article 6.2.6 &amp; 6.2.7 and formula (6.25),(6.28)

|   |                 |        |    |
|---|-----------------|--------|----|
| Plastic shear resistance for $V_y$ and $T_{Ed}$ | $V_{pl,T,y,Rd}$ | 815,38 | kN |
| Unity check                                     |                 | 0,00   | -  |

$$V_{pl,T,y,Rd} = \left( 1 - \frac{\tau_{t,Ed} \times \gamma_{M0} \times \sqrt{3}}{f_y} \right) \times V_{pl,y,Rd} = \left( 1 - \frac{12,6[\text{MPa}] \times 1,00 \times \sqrt{3}}{355,0[\text{MPa}]} \right) \times 869,00[\text{kN}] = 815,38[\text{kN}]$$

$$\text{Unity check} = \frac{|V_{y,Ed}|}{V_{pl,T,y,Rd}} = \frac{|0,61[\text{kN}]|}{815,38[\text{kN}]} = \mathbf{0,00} \leq \mathbf{1,00}$$

**Combined Shear and Torsion check for  $V_z$  and  $\tau_{t,Ed}$** 

According to EN 1993-1-1 article 6.2.6 &amp; 6.2.7 and formula (6.25),(6.28)

|   |                 |        |    |
|---|-----------------|--------|----|
| Plastic shear resistance for $V_z$ and $T_{Ed}$ | $V_{pl,T,z,Rd}$ | 815,38 | kN |
| Unity check                                     |                 | 0,01   | -  |

$$V_{pl,T,z,Rd} = \left( 1 - \frac{\tau_{t,Ed} \times \gamma_{M0} \times \sqrt{3}}{f_y} \right) \times V_{pl,z,Rd} = \left( 1 - \frac{12,6[\text{MPa}] \times 1,00 \times \sqrt{3}}{355,0[\text{MPa}]} \right) \times 869,00[\text{kN}] = 815,38[\text{kN}]$$

$$\text{Unity check} = \frac{|V_{z,Ed}|}{V_{pl,T,z,Rd}} = \frac{|-4,50[\text{kN}]|}{815,38[\text{kN}]} = \mathbf{0,01} \leq \mathbf{1,00}$$

**Combined bending, axial force and shear force check**

According to EN 1993-1-1 article 6.2.9.1 and formula (6.31)

|  |                 |        |     |
|--|-----------------|--------|-----|
| Resultant bending moment                                 | $M_{resultant}$ | 14,44  | kNm |
| Resultant shear force                                    | $V_{resultant}$ | 4,55   | kN  |
| Design plastic moment resistance reduced due to $N_{Ed}$ | $M_{N,Rd}$      | 196,88 | kNm |
| Unity check  |                 | 0,07   | -   |

$$n = \frac{|N_{Ed}|}{N_{pl,Rd}} = \frac{|-184,66[\text{kN}]|}{2364,30[\text{kN}]} = 0,08$$

$$M_{N,Rd} = M_{pl,Rd} \times (1 - n^{1,7}) = 199,50[\text{kNm}] \times (1 - 0,08^{1,7}) = 196,88[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{resultant}|}{M_{N,Rd}} = \frac{|14,44[\text{kNm}]|}{196,88[\text{kNm}]} = \mathbf{0,07} \leq \mathbf{1,00}$$

**Note:** The resultant internal forces are used for CHS sections.**Note:** Since the shear forces are less than half the plastic shear resistances their effect on the moment resistances is neglected.

The member satisfies the section check.

**...:STABILITY CHECK:...:**



**Classification for member buckling design**

Decisive position for stability classification: 0,000 m

Decisive utilisation factor  $\eta$ : 0,07

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d<br>[mm] | t<br>[mm] | d/t<br>[-] | Class 1 Limit<br>[-] | Class 2 Limit<br>[-] | Class 3 Limit<br>[-] | Class |
|-----------|-----------|------------|----------------------|----------------------|----------------------|-------|
| 273       | 8         | 34,1       | 33,1                 | 46,3                 | 59,6                 | 2     |

The cross-section is classified as Class 2

**Note:** The decisive position for the stability classification is based on the utilisation factor  $\eta$  according to Semi-Comp+.**Flexural Buckling check**

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

| Buckling parameters  |                   | yy     | zz       |    |
|----------------------|-------------------|--------|----------|----|
| Sway type            |                   | sway   | non-sway |    |
| System length        | L                 | 18,188 | 18,188   | m  |
| Buckling factor      | k                 | 1,12   | 0,59     |    |
| Buckling length      | $l_{cr}$          | 20,361 | 10,772   | m  |
| Critical Euler load  | $N_{cr}$          | 292,55 | 1045,32  | kN |
| Slenderness          | $\lambda$         | 217,22 | 114,91   |    |
| Relative slenderness | $\lambda_{rel}$   | 2,84   | 1,50     |    |
| Limit slenderness    | $\lambda_{rel,0}$ | 0,20   | 0,20     |    |
| Buckling curve       |                   | c      | c        |    |
| Imperfection         | $\alpha$          | 0,49   | 0,49     |    |
| Reduction factor     | $\chi$            | 0,10   | 0,31     |    |
| Buckling resistance  | $N_{b,Rd}$        | 225,57 | 673,32   | kN |

| Flexural Buckling verification |            |            |                |
|--------------------------------|------------|------------|----------------|
| Cross-section area             | A          | 6,6600e-03 | m <sup>2</sup> |
| Buckling resistance            | $N_{b,Rd}$ | 225,57     | kN             |
| Unity check                    |            | 0,82       | -              |

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4]}{20,361[\text{m}]^2} = 292,55[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4]}{10,772[\text{m}]^2} = 1045,32[\text{kN}]$$

$$\lambda_y = \frac{l_{cr,y}}{i_y} = \frac{20,361[\text{m}]}{94[\text{mm}]} = 217,22$$

$$\lambda_z = \frac{l_{cr,z}}{i_z} = \frac{10,772[\text{m}]}{94[\text{mm}]} = 114,91$$

$$\lambda_{rel,y} = \frac{\lambda_y}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{217,22}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 2,84$$

$$\lambda_{rel,z} = \frac{\lambda_z}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{114,91}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 1,50$$

$$\varphi_y = 0,5 \times [1 + \alpha_y \times (\lambda_{rel,y} - \lambda_{rel,y,0}) + \lambda_{rel,y}^2] = 0,5 \times [1 + 0,49 \times (2,84 - 0,20) + 2,84^2] = 5,19$$

$$\varphi_z = 0,5 \times [1 + \alpha_z \times (\lambda_{rel,z} - \lambda_{rel,z,0}) + \lambda_{rel,z}^2] = 0,5 \times [1 + 0,49 \times (1,50 - 0,20) + 1,50^2] = 1,95$$

$$\chi_y = \min \left( \frac{1}{\varphi_y + \sqrt{\varphi_y^2 - \lambda_{rel,y}^2}}, 1 \right) = \min \left( \frac{1}{5,19 + \sqrt{5,19^2 - 2,84^2}}, 1 \right) = \min(0,10,1) = 0,10$$

$$\chi_z = \min \left( \frac{1}{\varphi_z + \sqrt{\varphi_z^2 - \lambda_{rel,z}^2}}, 1 \right) = \min \left( \frac{1}{1,95 + \sqrt{1,95^2 - 1,50^2}}, 1 \right) = \min(0,31,1) = 0,31$$

$$N_{b,y,Rd} = \frac{\chi_y \times A \times f_y}{\gamma_{M1}} = \frac{0,10 \times 6,6600 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,10} = 225,57 [kN]$$

$$N_{b,z,Rd} = \frac{\chi_z \times A \times f_y}{\gamma_{M1}} = \frac{0,31 \times 6,6600 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,10} = 673,32 [kN]$$

$$N_{b,Rd} = \min(N_{b,y,Rd}, N_{b,z,Rd}) = \min(225,57 [kN], 673,32 [kN]) = 225,57 [kN]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{b,Rd}} = \frac{|-184,66 [kN]|}{225,57 [kN]} = \mathbf{0,82} \leq \mathbf{1,00}$$

### Torsional(-Flexural) Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

**Note:** The cross-section concerns a CHS section which is not susceptible to Torsional(-Flexural) Buckling.

### Lateral Torsional Buckling check

According to EN 1993-1-1 article 6.3.2.1

**Note:** The cross-section concerns a CHS section which is not susceptible to Lateral Torsional Buckling.

### Bending and axial compression check

According to EN 1993-1-1 article 6.3.3 and formula (6.61),(6.62)

| Bending and axial compression check parameters |                   |                      |                |
|--|-------------------|----------------------|----------------|
| Interaction method                             |                   | alternative method 1 |                |
| Cross-section area                             | A                 | 6,6600e-03           | m <sup>2</sup> |
| Plastic section modulus                        | W <sub>pl,y</sub> | 5,6197e-04           | m <sup>3</sup> |
| Plastic section modulus                        | W <sub>pl,z</sub> | 5,6197e-04           | m <sup>3</sup> |
| Design compression force                       | N <sub>Ed</sub>   | 184,66               | kN             |
| Design bending moment (maximum)                | M <sub>y,Ed</sub> | -14,03               | kNm            |
| Design bending moment (maximum)                | M <sub>z,Ed</sub> | 3,42                 | kNm            |
| Characteristic compression resistance          | N <sub>Rk</sub>   | 2364,30              | kN             |
| Characteristic moment resistance               | M <sub>y,Rk</sub> | 199,50               | kNm            |
| Characteristic moment resistance               | M <sub>z,Rk</sub> | 199,50               | kNm            |
| Reduction factor                               | χ <sub>y</sub>    | 0,10                 |                |
| Reduction factor                               | χ <sub>z</sub>    | 0,31                 |                |
| Reduction factor                               | χ <sub>LT</sub>   | 1,00                 |                |
| Interaction factor                             | k <sub>yy</sub>   | 0,45                 |                |
| Interaction factor                             | k <sub>yz</sub>   | 0,50                 |                |
| Interaction factor                             | k <sub>zy</sub>   | 0,65                 |                |
| Interaction factor                             | k <sub>zz</sub>   | 1,13                 |                |

Maximum moment M<sub>y,Ed</sub> is derived from beam B5563 position 18,188 m.

Maximum moment M<sub>z,Ed</sub> is derived from beam B5563 position 18,188 m.

| Interaction method 1 parameters |                   |            |                |
|---------------------------------|-------------------|------------|----------------|
| Critical Euler load             | N <sub>cr,y</sub> | 292,55     | kN             |
| Critical Euler load             | N <sub>cr,z</sub> | 1045,32    | kN             |
| Elastic critical load           | N <sub>cr,T</sub> | 537922,16  | kN             |
| Plastic section modulus         | W <sub>pl,y</sub> | 5,6197e-04 | m <sup>3</sup> |
| Elastic section modulus         | W <sub>el,y</sub> | 4,2870e-04 | m <sup>3</sup> |
| Plastic section modulus         | W <sub>pl,z</sub> | 5,6197e-04 | m <sup>3</sup> |
| Elastic section modulus         | W <sub>el,z</sub> | 4,2870e-04 | m <sup>3</sup> |
| Second moment of area           | I <sub>y</sub>    | 5,8517e-05 | m <sup>4</sup> |

| Interaction method 1 parameters                |                       |                            |       |
|--|-----------------------|----------------------------|-------|
| Second moment of area                          | $I_z$                 | 5,8517e-05                 | $m^4$ |
| Torsional constant                             | $I_t$                 | 1,1703e-04                 | $m^4$ |
| Method for equivalent moment factor $C_{my,0}$ |                       | Table A.2 Line 2 (General) |       |
| Design bending moment (maximum)                | $M_{y,Ed}$            | -14,03                     | kNm   |
| Maximum relative deflection                    | $\delta_z$            | -3,1                       | mm    |
| Equivalent moment factor                       | $C_{my,0}$            | 0,42                       |       |
| Method for equivalent moment factor $C_{mz,0}$ |                       | Table A.2 Line 2 (General) |       |
| Design bending moment (maximum)                | $M_{z,Ed}$            | 3,42                       | kNm   |
| Maximum relative deflection                    | $\delta_y$            | -1,3                       | mm    |
| Equivalent moment factor                       | $C_{mz,0}$            | 0,85                       |       |
| Factor   | $\mu_y$               | 0,39                       |       |
| Factor   | $\mu_z$               | 0,87                       |       |
| Factor   | $\epsilon_y$          | 1,18                       |       |
| Factor   | $a_{LT}$              | 0,00                       |       |
| Critical moment for uniform bending            | $M_{cr,0}$            | 1861,59                    | kNm   |
| Relative slenderness                           | $\lambda_{rel,0}$     | 0,33                       |       |
| Limit relative slenderness                     | $\lambda_{rel,0,lim}$ | 0,30                       |       |
| Equivalent moment factor                       | $C_{my}$              | 0,42                       |       |
| Equivalent moment factor                       | $C_{mz}$              | 0,85                       |       |
| Equivalent moment factor                       | $C_{mLT}$             | 1,00                       |       |
| Factor   | $b_{LT}$              | 0,00                       |       |
| Factor   | $c_{LT}$              | 0,00                       |       |
| Factor   | $d_{LT}$              | 0,00                       |       |
| Factor   | $e_{LT}$              | 0,00                       |       |
| Factor   | $w_y$                 | 1,31                       |       |
| Factor   | $w_z$                 | 1,31                       |       |
| Factor   | $n_{pl}$              | 0,09                       |       |
| Maximum relative slenderness                   | $\lambda_{rel,max}$   | 2,84                       |       |
| Factor   | $C_{yy}$              | 0,99                       |       |
| Factor   | $C_{yz}$              | 0,49                       |       |
| Factor   | $C_{zy}$              | 0,92                       |       |
| Factor   | $C_{zz}$              | 0,80                       |       |

Unity check (6.61) = 0,82 + 0,04 + 0,01 = 0,86 -

Unity check (6.62) = 0,27 + 0,05 + 0,02 = 0,35 -

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4]}{20,361[\text{m}]^2} = 292,55[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4]}{10,772[\text{m}]^2} = 1045,32[\text{kN}]$$

$$N_{cr,T} = \frac{1}{i_0^2} \times \left( G \times I_t + \frac{\pi^2 \times E \times I_w}{l_{cr}^2} \right) = \frac{1}{133[\text{mm}]^2} \times \left( 80769,2[\text{MPa}] \times 1,1703 \cdot 10^{-4}[\text{m}^4] + \frac{\pi^2 \times 210000,0[\text{MPa}] \times 8,0163 \cdot 10^{-40}[\text{m}^6]}{18,188[\text{m}]^2} \right) = 537922,16[\text{kN}]$$

$$C_{my,0} = 1 + \left( \frac{\pi^2 \times E \times I_y \times |\delta_z|}{L^2 \times |M_{y,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,y}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4] \times |-3,1[\text{mm}]|}{18,188[\text{m}]^2 \times |-14,03[\text{kNm}]|} - 1 \right) \times \frac{|184,66[\text{kN}]|}{292,55[\text{kN}]} = 0,42$$

$$C_{mz,0} = 1 + \left( \frac{\pi^2 \times E \times I_z \times |\delta_y|}{L^2 \times |M_{z,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,z}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4] \times |-1,3[\text{mm}]|}{18,188[\text{m}]^2 \times |3,42[\text{kNm}]|} - 1 \right) \times \frac{|184,66[\text{kN}]|}{1045,32[\text{kN}]} = 0,85$$

$$\mu_y = \frac{1 - \frac{|N_{Ed}|}{N_{cr,y}}}{1 - \frac{\chi_y \times |N_{Ed}|}{N_{cr,y}}} = \frac{1 - \frac{|184,66[\text{kN}]|}{292,55[\text{kN}]}}{1 - \frac{0,10 \times |184,66[\text{kN}]|}{292,55[\text{kN}]}} = 0,39$$

$$\mu_z = \frac{1 - \frac{|N_{Ed}|}{N_{cr,z}}}{1 - \frac{\chi_z \times |N_{Ed}|}{N_{cr,z}}} = \frac{1 - \frac{184,66[\text{kN}]}{1045,32[\text{kN}]}}{1 - \frac{0,31 \times 184,66[\text{kN}]}{1045,32[\text{kN}]}} = 0,87$$

$$\varepsilon_y = \left| \frac{M_{y,Ed}}{N_{Ed}} \right| \times \frac{A}{W_{el,y}} = \left| \frac{-14,03[\text{kNm}]}{184,66[\text{kN}]} \right| \times \frac{6,6600 \cdot 10^{-3}[\text{m}^2]}{4,2870 \cdot 10^{-4}[\text{m}^3]} = 1,18$$

$$a_{LT} = \max \left( 1 - \frac{l_t}{l_y}, 0 \right) = \max \left( 1 - \frac{1,1703 \cdot 10^{-4}[\text{m}^4]}{5,8517 \cdot 10^{-5}[\text{m}^4]}, 0 \right) = \max(-1,00, 0,00) = 0,00$$

$$M_{cr,0} = \frac{C_1 \times \pi^2 \times E \times I_z}{(k \times l_{LT})^2} \times \left[ \sqrt{\frac{\left(\frac{k}{k_w}\right)^2 \times I_w}{I_z} + \frac{(k \times l_{LT})^2 \times G \times I_t}{\pi^2 \times E \times I_z} + (C_2 \times z_g - C_3 \times z_j)^2} - (C_2 \times z_g - C_3 \times z_j) \right]$$

$$= \frac{1,00 \times \pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4]}{(1,00 \times 18,188[\text{m}])^2} \times \left[ \sqrt{\frac{\left(\frac{1,00}{1,00}\right)^2 \times 8,0163 \cdot 10^{-40}[\text{m}^6]}{5,8517 \cdot 10^{-5}[\text{m}^4]} + \frac{(1,00 \times 18,188[\text{m}])^2 \times 80769,2[\text{MPa}] \times 1,1703 \cdot 10^{-4}[\text{m}^4]}{\pi^2 \times 210000,0[\text{MPa}] \times 5,8517 \cdot 10^{-5}[\text{m}^4]} + (0,93 \times 0[\text{mm}] - 0,41 \times 0[\text{mm}])^2} - (0,93 \times 0[\text{mm}] - 0,41 \times 0[\text{mm}]) \right]$$

$$= 1861,59[\text{kNm}]$$

$$\lambda_{rel,0} = \sqrt{\frac{W_{pl,y} \times f_y}{M_{cr,0}}} = \sqrt{\frac{5,6197 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{1861,59[\text{kNm}]} = 0,33$$

$$\lambda_{rel,0,lim} = 0,2 \times \sqrt{C_1} \times \sqrt{\left(1 - \frac{|N_{Ed}|}{N_{cr,z}}\right) \times \left(1 - \frac{|N_{Ed}|}{N_{cr,T}}\right)} = 0,2 \times \sqrt{2,40} \times \sqrt{\left(1 - \frac{184,66[\text{kN}]}{1045,32[\text{kN}]}\right) \times \left(1 - \frac{184,66[\text{kN}]}{537922,16[\text{kN}]}\right)} = 0,30$$

$$C_{my} = C_{my,0} + (1 - C_{my,0}) \times \frac{\sqrt{\varepsilon_y} \times a_{LT}}{1 + \sqrt{\varepsilon_y} \times a_{LT}} = 0,42 + (1 - 0,42) \times \frac{\sqrt{1,18} \times 0,00}{1 + \sqrt{1,18} \times 0,00} = 0,42$$

$$C_{mz} = C_{mz,0} = 0,85$$

$$C_{mLT} = \max \left[ C_{my}^2 \times \frac{a_{LT}}{\sqrt{\left(1 - \frac{|N_{Ed}|}{N_{cr,z}}\right) \times \left(1 - \frac{|N_{Ed}|}{N_{cr,T}}\right)}}, 1 \right] = \max \left[ 0,42^2 \times \frac{0,00}{\sqrt{\left(1 - \frac{184,66[\text{kN}]}{1045,32[\text{kN}]}\right) \times \left(1 - \frac{184,66[\text{kN}]}{537922,16[\text{kN}]}\right)}}, 1 \right]$$

$$= \max[0,00, 1,00] = 1,00$$

$$b_{LT} = 0,5 \times a_{LT} \times \lambda_{rel,0}^2 \times \frac{|M_{y,Ed}|}{\chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = 0,5 \times 0,00 \times 0,33^2 \times \frac{|-14,03[\text{kNm}]|}{1,00 \times 199,50[\text{kNm}]} \times \frac{|3,42[\text{kNm}]|}{199,50[\text{kNm}]} = 0,00$$

$$c_{LT} = 10 \times a_{LT} \times \frac{\lambda_{rel,0}^2}{5 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 10 \times 0,00 \times \frac{0,33^2}{5 + 1,50^4} \times \frac{|-14,03[\text{kNm}]|}{0,42 \times 1,00 \times 199,50[\text{kNm}]} = 0,00$$

$$d_{LT} = 2 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{C_{mz} \times M_{pl,z,Rd}}$$

$$= 2 \times 0,00 \times \frac{0,33}{0,1 + 1,50^4} \times \frac{|-14,03[\text{kNm}]|}{0,42 \times 1,00 \times 199,50[\text{kNm}]} \times \frac{|3,42[\text{kNm}]|}{0,85 \times 199,50[\text{kNm}]} = 0,00$$

$$e_{LT} = 1,7 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 1,7 \times 0,00 \times \frac{0,33}{0,1 + 1,50^4} \times \frac{|-14,03[\text{kNm}]|}{0,42 \times 1,00 \times 199,50[\text{kNm}]} = 0,00$$

$$w_y = \min \left( \frac{W_{pl,y}}{W_{el,y}}, 1,5 \right) = \min \left( \frac{5,6197 \cdot 10^{-4}[\text{m}^3]}{4,2870 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,31, 1,50) = 1,31$$

$$w_z = \min \left( \frac{W_{pl,z}}{W_{el,z}}, 1, 5 \right) = \min \left( \frac{5,6197 \cdot 10^{-4} [m^3]}{4,2870 \cdot 10^{-4} [m^3]}, 1, 5 \right) = \min (1,31, 1,50) = 1,31$$

$$n_{pl} = \frac{|N_{Ed}|}{N_{Rk}} = \frac{|184,66[kN]|}{\frac{2364,30[kN]}{1,10}} = 0,09$$

$$\lambda_{rel,max} = \max(\lambda_{rel,y}, \lambda_{rel,z}) = \max(2,84, 1,50) = 2,84$$

$$\begin{aligned} C_{yy} &= \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max} - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max}^2 \right) \times n_{pl} - b_{LT} \right], \frac{W_{el,y}}{W_{pl,y}} \right\} \\ &= \max \left\{ 1 + (1,31 - 1) \times \left[ \left( 2 - \frac{1,6}{1,31} \times 0,42^2 \times 2,84 - \frac{1,6}{1,31} \times 0,42^2 \times 2,84^2 \right) \times 0,09 - 0,00 \right], \frac{4,2870 \cdot 10^{-4} [m^3]}{5,6197 \cdot 10^{-4} [m^3]} \right\} = \max \{0,99, 0,76\} \\ &= 0,99 \end{aligned}$$

$$\begin{aligned} C_{yz} &= \max \left\{ 1 + (w_z - 1) \times \left[ \left( 2 - 14 \times \frac{C_{mz}^2 \times \lambda_{rel,max}^2}{w_z^5} \right) \times n_{pl} - c_{LT} \right], 0,6 \times \sqrt{\frac{w_z}{w_y}} \times \frac{W_{el,z}}{W_{pl,z}} \right\} \\ &= \max \left\{ 1 + (1,31 - 1) \times \left[ \left( 2 - 14 \times \frac{0,85^2 \times 2,84^2}{1,31^5} \right) \times 0,09 - 0,00 \right], 0,6 \times \sqrt{\frac{1,31}{1,31}} \times \frac{4,2870 \cdot 10^{-4} [m^3]}{5,6197 \cdot 10^{-4} [m^3]} \right\} = \max \{0,49, 0,46\} = 0,49 \end{aligned}$$

$$\begin{aligned} C_{zy} &= \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - 14 \times \frac{C_{my}^2 \times \lambda_{rel,max}^2}{w_y^5} \right) \times n_{pl} - d_{LT} \right], 0,6 \times \sqrt{\frac{w_y}{w_z}} \times \frac{W_{el,y}}{W_{pl,y}} \right\} \\ &= \max \left\{ 1 + (1,31 - 1) \times \left[ \left( 2 - 14 \times \frac{0,42^2 \times 2,84^2}{1,31^5} \right) \times 0,09 - 0,00 \right], 0,6 \times \sqrt{\frac{1,31}{1,31}} \times \frac{4,2870 \cdot 10^{-4} [m^3]}{5,6197 \cdot 10^{-4} [m^3]} \right\} = \max \{0,92, 0,46\} = 0,92 \end{aligned}$$

$$\begin{aligned} C_{zz} &= \max \left[ 1 + (w_z - 1) \times \left( 2 - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max} - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max}^2 - e_{LT} \right) \times n_{pl}, \frac{W_{el,z}}{W_{pl,z}} \right] \\ &= \max \left[ 1 + (1,31 - 1) \times \left( 2 - \frac{1,6}{1,31} \times 0,85^2 \times 2,84 - \frac{1,6}{1,31} \times 0,85^2 \times 2,84^2 - 0,00 \right) \times 0,09, \frac{4,2870 \cdot 10^{-4} [m^3]}{5,6197 \cdot 10^{-4} [m^3]} \right] = \max [0,80, 0,76] = 0,80 \end{aligned}$$

$$N_{Rk} = A \times f_y = 6,6600 \cdot 10^{-3} [m^2] \times 355,0 [MPa] = 2364,30 [kN]$$

$$M_{y,Rk} = W_{pl,y} \times f_y = 5,6197 \cdot 10^{-4} [m^3] \times 355,0 [MPa] = 199,50 [kNm]$$

$$M_{z,Rk} = W_{pl,z} \times f_y = 5,6197 \cdot 10^{-4} [m^3] \times 355,0 [MPa] = 199,50 [kNm]$$

$$k_{yy} = C_{my} \times C_{mLT} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{yy}} = 0,42 \times 1,00 \times \frac{0,39}{1 - \frac{|184,66[kN]|}{292,55[kN]}} \times \frac{1}{0,99} = 0,45$$

$$k_{yz} = C_{mz} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{yz}} \times 0,6 \times \sqrt{\frac{w_z}{w_y}} = 0,85 \times \frac{0,39}{1 - \frac{|184,66[kN]|}{1045,32[kN]}} \times \frac{1}{0,49} \times 0,6 \times \sqrt{\frac{1,31}{1,31}} = 0,50$$

$$k_{zy} = C_{my} \times C_{mLT} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{zy}} \times 0,6 \times \sqrt{\frac{w_y}{w_z}} = 0,42 \times 1,00 \times \frac{0,87}{1 - \frac{|184,66[kN]|}{292,55[kN]}} \times \frac{1}{0,92} \times 0,6 \times \sqrt{\frac{1,31}{1,31}} = 0,65$$

$$k_{zz} = C_{mz} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{zz}} = 0,85 \times \frac{0,87}{1 - \frac{|184,66[kN]|}{1045,32[kN]}} \times \frac{1}{0,80} = 1,13$$


$$\begin{aligned}
 \text{Unity check (6.61)} &= \frac{|N_{Ed}|}{\chi_y \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{yy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{yz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\
 &= \frac{|184,66[\text{kN}]|}{0,10 \times \frac{2364,30[\text{kN}]}{1,10}} + 0,45 \times \frac{|-14,03[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{199,50[\text{kNm}]}{1,10}} + 0,50 \times \frac{|3,42[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{199,50[\text{kNm}]}{1,10}} = \mathbf{0,86} \leq \mathbf{1,00}
 \end{aligned}$$

$$\begin{aligned}
 \text{Unity check (6.62)} &= \frac{|N_{Ed}|}{\chi_z \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{zy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{zz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\
 &= \frac{|184,66[\text{kN}]|}{0,31 \times \frac{2364,30[\text{kN}]}{1,10}} + 0,65 \times \frac{|-14,03[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{199,50[\text{kNm}]}{1,10}} + 1,13 \times \frac{|3,42[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{199,50[\text{kNm}]}{1,10}} = \mathbf{0,35} \leq \mathbf{1,00}
 \end{aligned}$$

$$\text{Unity check} = \max(\text{Unity check (6.61)}, \text{Unity check (6.62)}) = \max(0,86, 0,35) = \mathbf{0,86} \leq \mathbf{1,00}$$

The member satisfies the stability check.


## 4.1.3. Granično stanje uporabljivosti

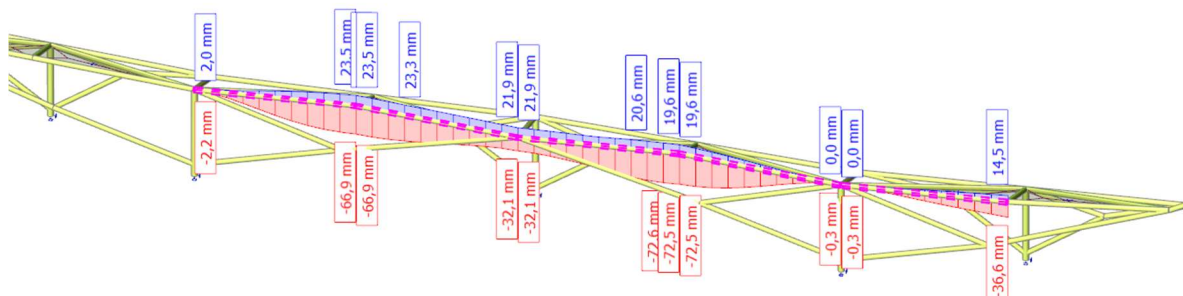

Slika 53: Prikaz pomaka pokrovnih nosača „PK“ (mm)

|                                | $u_z$               |
|--------------------------------|---------------------|
| Maksimalni pomak $u =$         | 40,4 mm             |
| Duljina nosača $L =$           | 18,67 m             |
| Dopušteni pomak $f_{p,dop.} =$ | 74,7 mm ( $L/250$ ) |

$$f_{max.} = 40,4 \text{ mm} < f_{p,dop.} = 74,7 \text{ mm}$$

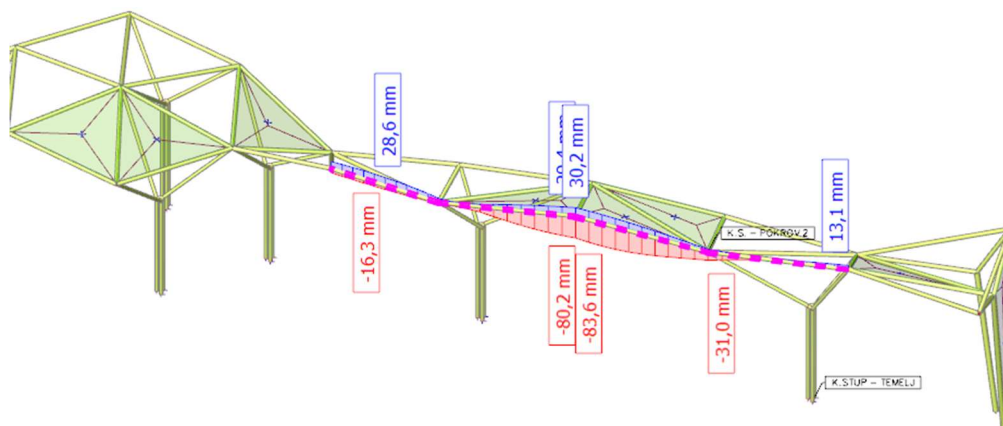


Slika 54: Prikaz pomaka pokrovnih nosača „PK“ (mm)

|                                | $u_z$               |
|--------------------------------|---------------------|
| Maksimalni pomak $u =$         | 60,0 mm             |
| Duljina nosača $L =$           | 18,36 m             |
| Dopušteni pomak $f_{p,dop.} =$ | 73,4 mm ( $L/250$ ) |


$$f_{max.} = 60,0 \text{ mm} < f_{p,dop.} = 73,4 \text{ mm}$$

## 4.2. Trostruki stup „S1“

### 4.2.1. Rezne sile trostrukog stupa „S1“

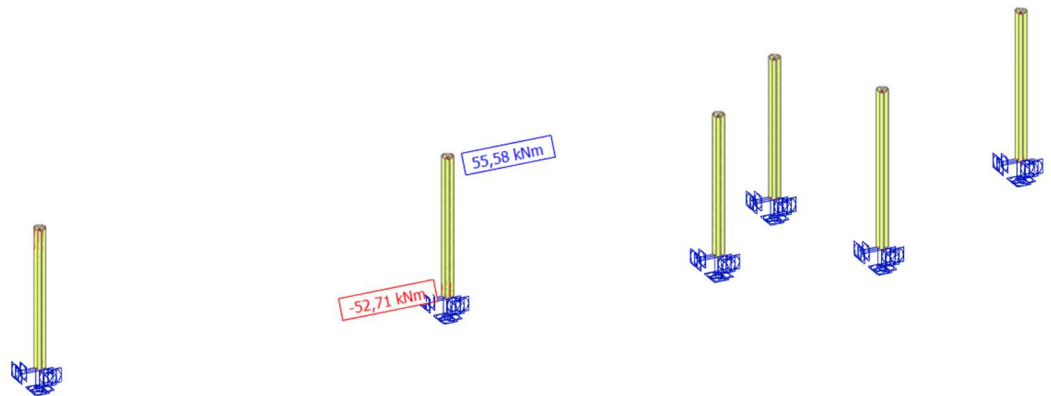


Slika 55: Moment savijanja  $M_y$  (kNm)- trostruki stup „S1“ od osi N1 do N7

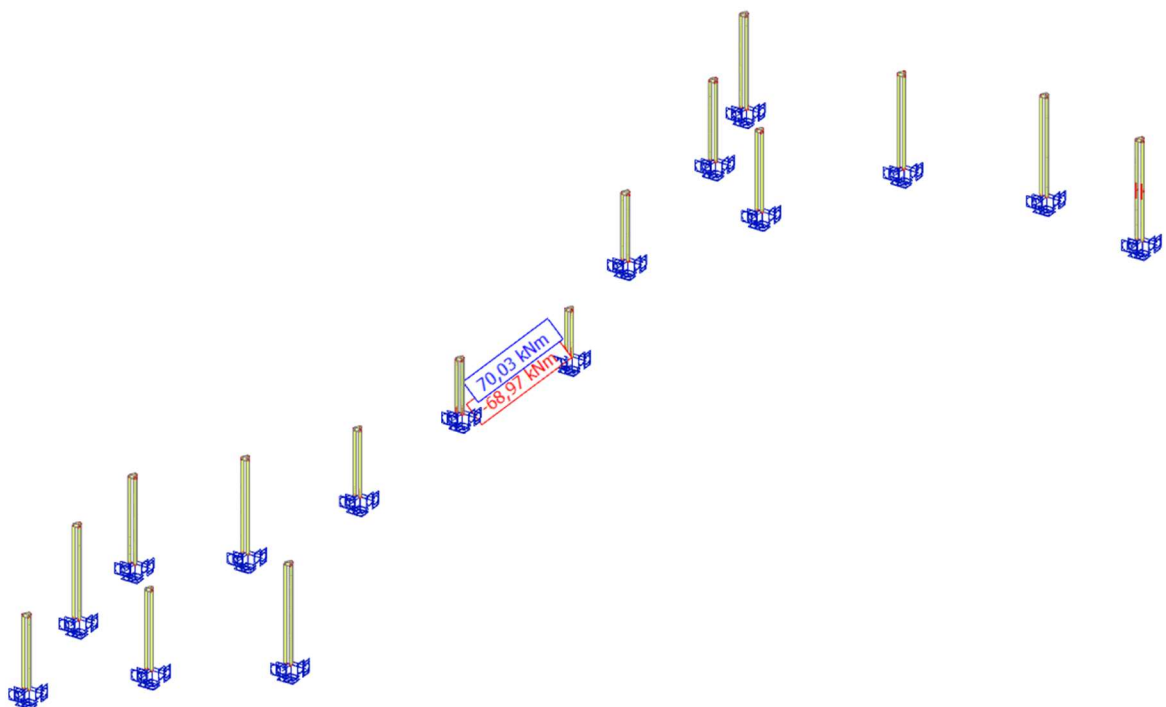


Slika 56: Moment savijanja  $M_y$  (kNm)- trostruki stup „S1“ od osi N13 do N27




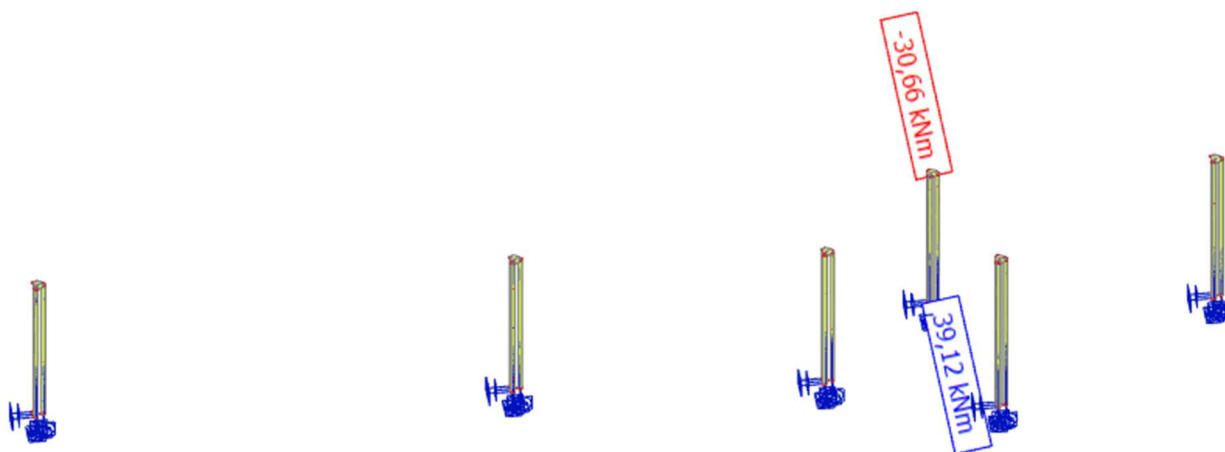


Slika 58: Moment savijanja  $M_z$  (kNm)- trostruki stup „S1“ od osi N1 do N7

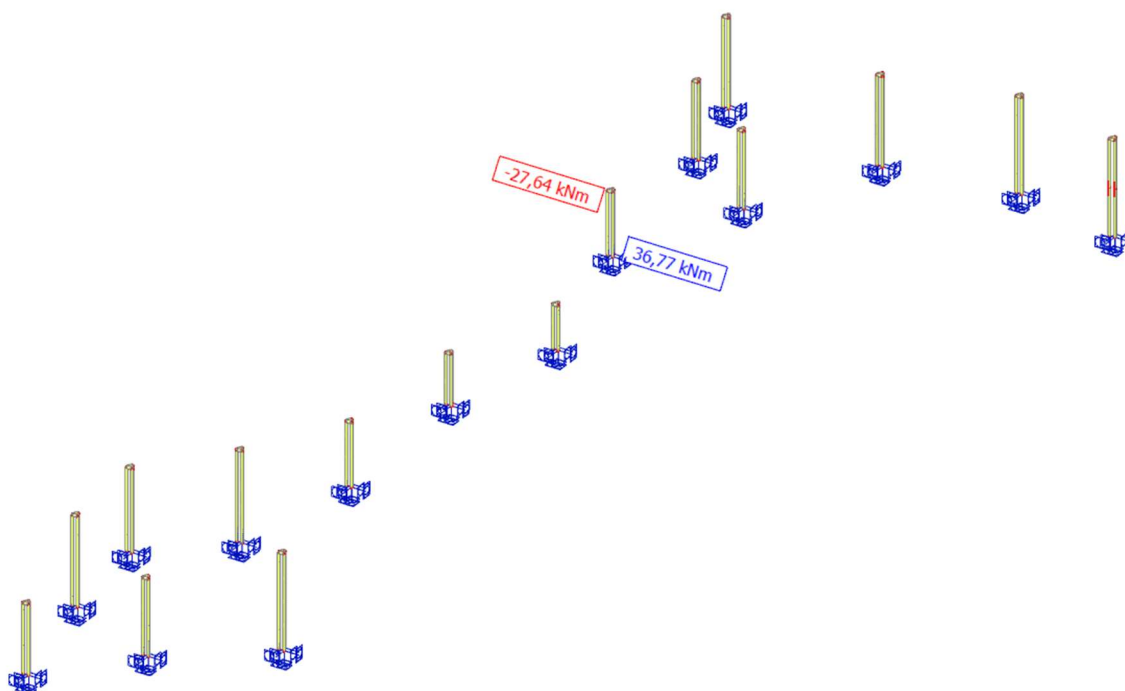


Slika 59: Moment savijanja  $M_z$  (kNm)- trostruki stup „S1“ od osi N13 do N27

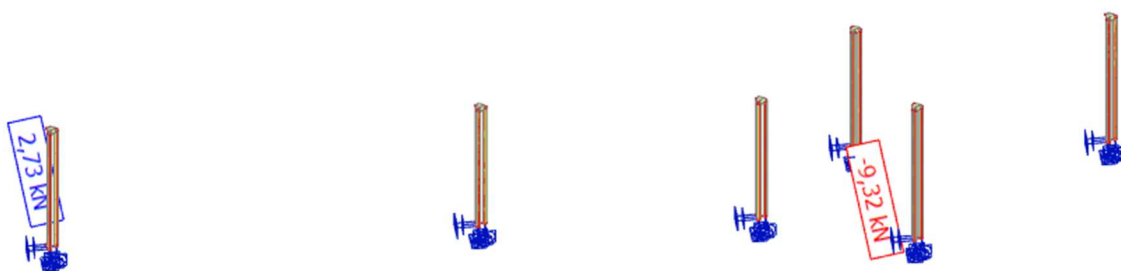


Slika 60: Poprečna sila  $V_Y$ (kN)- trostruki stup „S1“ od osi N1 do osi N7

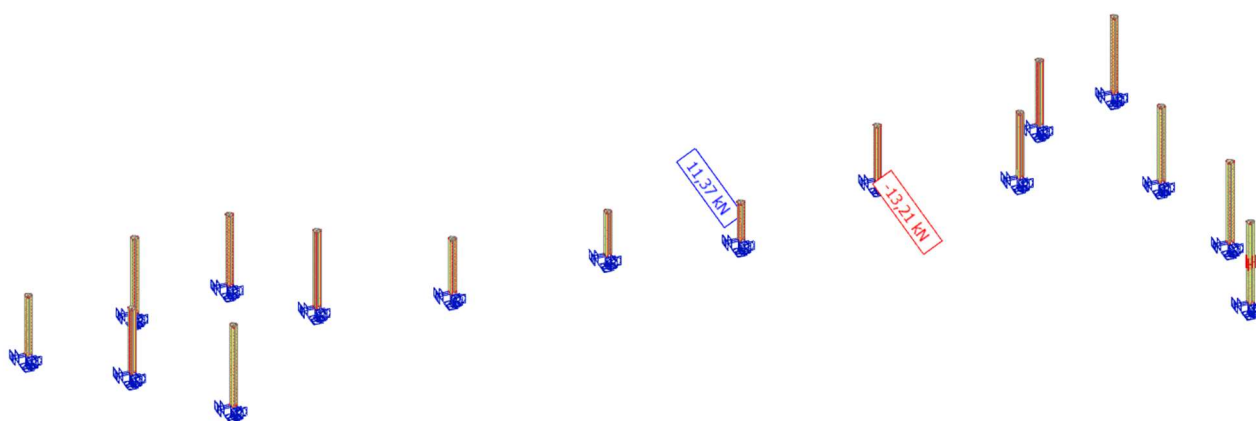


Slika 61: Poprečna sila  $V_Y$ (kN)- trostruki stup „S1“ od osi N13 do N27

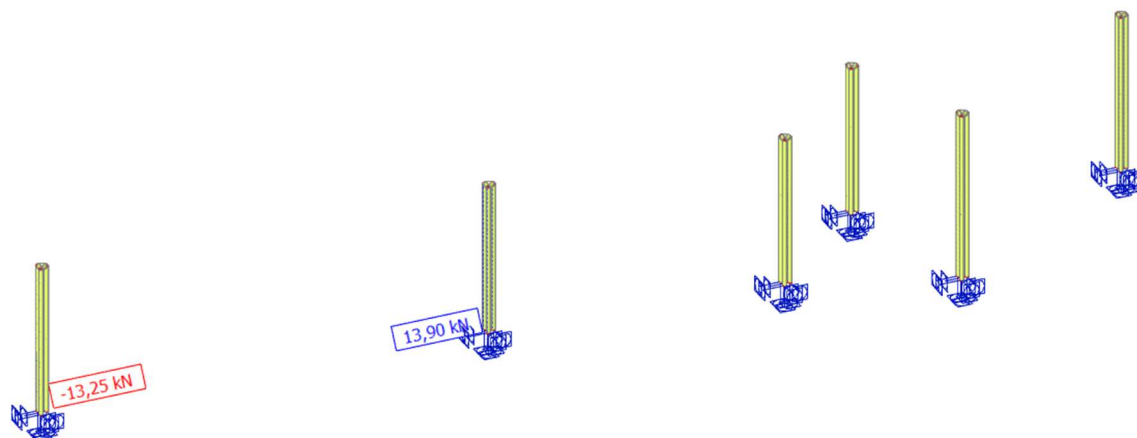


Slika 62: Poprečna sila  $V_z$ (kN)- trostruki stup „S1“ od osi N1 do osi N7

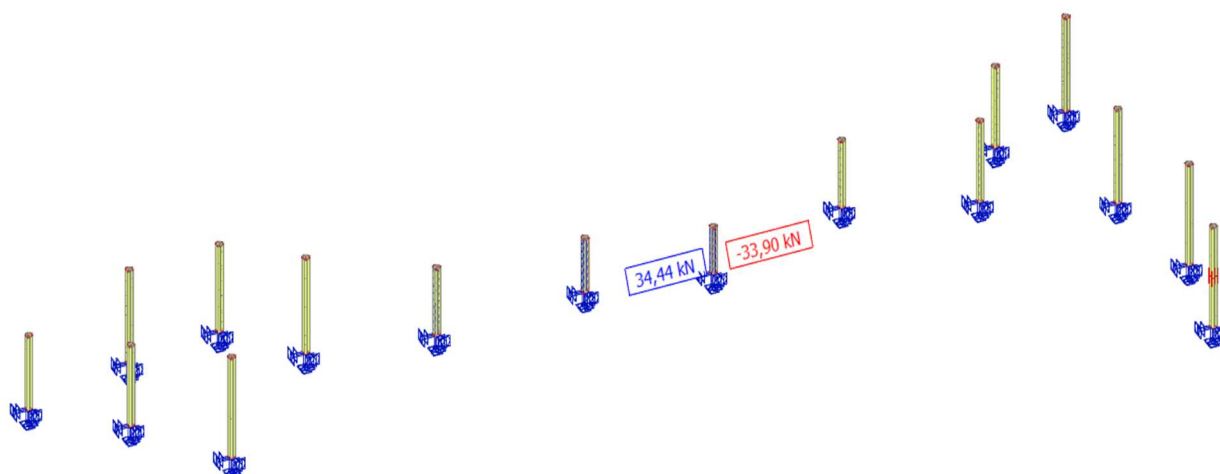

Slika 63: Poprečna sila  $V_z$ (kN)- trostruki stup „S1“ od osi N13 do N27

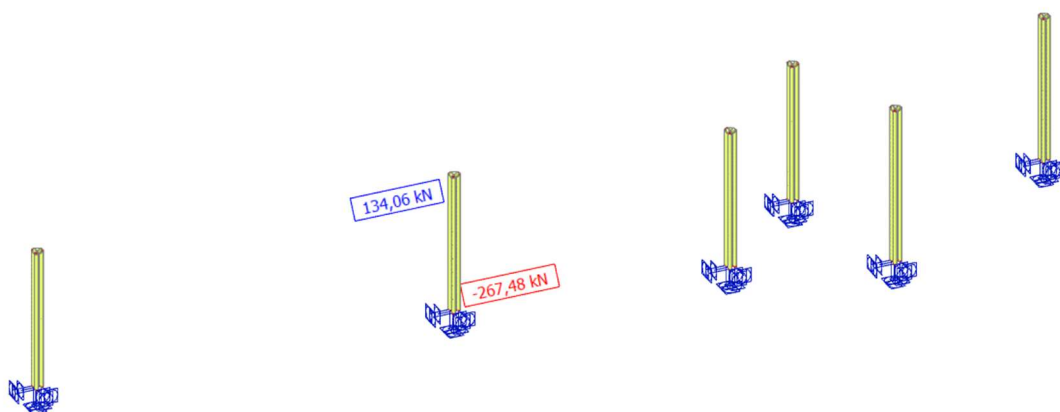


Slika 64: Uzdužna sila  $N$  (kN)- trostruki stup „SI“ od osi N1 do osi N7

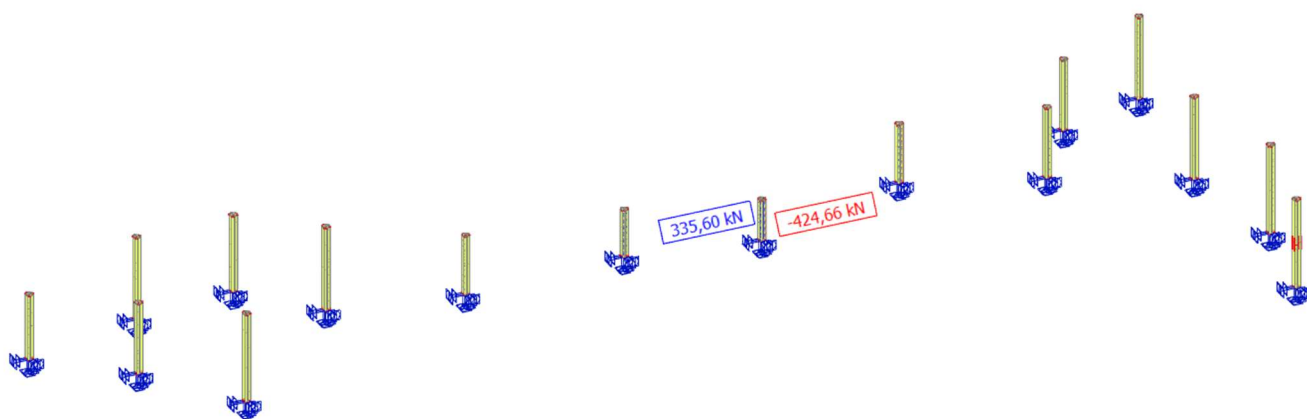


Slika 65: Uzdužna sila  $N$  (kN)- trostruki stup „SI“ od osi N13 do osi N27

#### 4.2.2. Dimenzioniranje trostrukog stupa „S1“

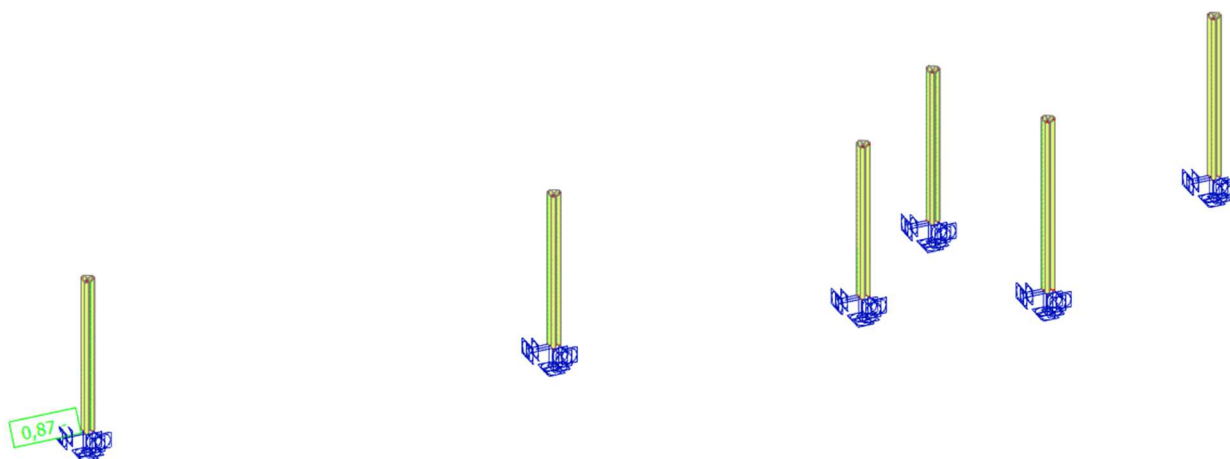

Slika 66: Prikaz iskoristivosti trostrukog stupa „S1“ od osi N1 do osi N7

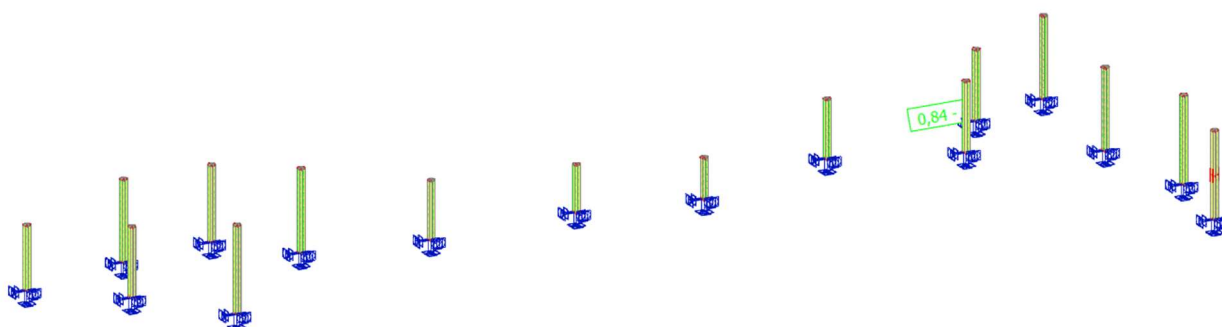

Slika 67: Prikaz iskoristivosti trostrukog stupa „S1“ od osi N13 do osi N27

## EC-EN 1993 Steel check ULS

Linear calculation  
 Combination: ULS-Set B (auto)  
 Coordinate system: Principal  
 Extreme 1D: Global  
 Selection: All

### EN 1993-1-1 Code Check

National annex: Standard EN

|                     |                        |                        |                    |              |                         |               |
|---------------------|------------------------|------------------------|--------------------|--------------|-------------------------|---------------|
| <b>Member B5633</b> | <b>0,000 / 8,000 m</b> | <b>CFCHS219.1X12.5</b> | <b>Cold formed</b> | <b>S 355</b> | <b>ULS-Set B (auto)</b> | <b>0,87 -</b> |
|---------------------|------------------------|------------------------|--------------------|--------------|-------------------------|---------------|

Note: EN 1993-1-3 article 1.1(3) specifies that this part does not apply to cold formed CHS and RHS sections. The default EN 1993-1-1 code check is executed instead of the EN 1993-1-3 code check.

| Combination key  |  |
|--|--|
| ULS-Set B (auto) / 1.35*G + 1.35*dg + 0.90*w1(x) + 1.50*T- + 0.90*w3(odizanje) |  |

| Partial safety factors       |               |      |
|------------------------------|---------------|------|
| Resistance of cross-sections | $\gamma_{M0}$ | 1,00 |
| Resistance to instability    | $\gamma_{M1}$ | 1,10 |
| Resistance of net sections   | $\gamma_{M2}$ | 1,25 |

| Material          |       |       |     |
|-------------------|-------|-------|-----|
| Yield strength    | $f_y$ | 355,0 | MPa |
| Ultimate strength | $f_u$ | 490,0 | MPa |

....:SECTION CHECK:....

The critical check is on position **0,000 m**

| Internal forces |            | Calculated | Unit |
|-----------------|------------|------------|------|
| Normal force    | $N_{Ed}$   | -133,06    | kN   |
| Shear force     | $V_{y,Ed}$ | -2,62      | kN   |
| Shear force     | $V_{z,Ed}$ | 7,55       | kN   |
| Torsion         | $T_{Ed}$   | -0,27      | kNm  |
| Bending moment  | $M_{y,Ed}$ | -31,75     | kNm  |
| Bending moment  | $M_{z,Ed}$ | 9,65       | kNm  |

### Classification for cross-section design

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d [mm] | t [mm] | d/t [-] | Class 1 Limit [-] | Class 2 Limit [-] | Class 3 Limit [-] | Class |
|--------|--------|---------|-------------------|-------------------|-------------------|-------|
| 219    | 13     | 17,5    | 33,1              | 46,3              | 59,6              | 1     |

The cross-section is classified as Class 1

### Compression check

According to EN 1993-1-1 article 6.2.4 and formula (6.9)

|                        |            |            |                |
|------------------------|------------|------------|----------------|
| Cross-section area     | A          | 8,1130e-03 | m <sup>2</sup> |
| Compression resistance | $N_{c,Rd}$ | 2880,11    | kN             |
| Unity check            |            | 0,05       | -              |

$$N_{c,Rd} = \frac{A \times f_y}{\gamma_{M0}} = \frac{8,1130 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,00} = 2880,11 [kN]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{c,Rd}} = \frac{|-133,06 [kN]|}{2880,11 [kN]} = 0,05 \leq 1,00$$

**Bending moment check for  $M_y$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,y}$    | 5,3420e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,y,Rd}$ | 189,64     | kNm            |
| Unity check             |               | 0,17       | -              |

$$M_{pl,y,Rd} = \frac{W_{pl,y} \times f_y}{\gamma_{M0}} = \frac{5,3420 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 189,64 [kNm]$$

$$\text{Unity check} = \frac{|M_{y,Ed}|}{M_{pl,y,Rd}} = \frac{|-31,75 [kNm]|}{189,64 [kNm]} = 0,17 \leq 1,00$$

**Bending moment check for  $M_z$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,z}$    | 5,3420e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,z,Rd}$ | 189,64     | kNm            |
| Unity check             |               | 0,05       | -              |

$$M_{pl,z,Rd} = \frac{W_{pl,z} \times f_y}{\gamma_{M0}} = \frac{5,3420 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 189,64 [kNm]$$

$$\text{Unity check} = \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = \frac{|9,65 [kNm]|}{189,64 [kNm]} = 0,05 \leq 1,00$$

**Shear check for  $V_y$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,1649e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_y$ | $V_{pl,y,Rd}$ | 1058,59    | kN             |
| Unity check                        |               | 0,00       | -              |

$$V_{pl,y,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,1649 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 1058,59 [kN]$$

$$\text{Unity check} = \frac{|V_{y,Ed}|}{V_{c,y,Rd}} = \frac{|-2,62 [kN]|}{1058,59 [kN]} = 0,00 \leq 1,00$$

**Shear check for  $V_z$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,1649e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_z$ | $V_{pl,z,Rd}$ | 1058,59    | kN             |
| Unity check                        |               | 0,01       | -              |

$$V_{pl,z,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,1649 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 1058,59 [kN]$$

$$\text{Unity check} = \frac{|V_{z,Ed}|}{V_{c,z,Rd}} = \frac{|7,55 [kN]|}{1058,59 [kN]} = 0,01 \leq 1,00$$

**Torsion check**

According to EN 1993-1-1 article 6.2.7 and formula (6.23)

|                          |          |       |     |
|--------------------------|----------|-------|-----|
| Index of fibre           | Fibre    | 1     |     |
| Total torsional moment   | $T_{Ed}$ | 0,3   | MPa |
| Elastic shear resistance | $T_{Rd}$ | 205,0 | MPa |
| Unity check              |          | 0,00  | -   |

$$\tau_{Ed} = \left| \frac{T_{Ed}}{T_{Ed,unit}} \times \tau_{Ed,unit} \right| = \left| \frac{-0,27[\text{kNm}]}{1,00[\text{kNm}]} \times 1193,190[\text{kN/m}^2] \right| = 0,3[\text{MPa}]$$

$$\tau_{Rd} = \frac{f_y}{\sqrt{3} \times \gamma_{M0}} = \frac{355,0[\text{MPa}]}{\sqrt{3} \times 1,00} = 205,0[\text{MPa}]$$

$$\text{Unity check} = \frac{\tau_{Ed}}{\tau_{Rd}} = \frac{0,3[\text{MPa}]}{205,0[\text{MPa}]} = \mathbf{0,00} \leq \mathbf{1,00}$$

**Note:** The unity check for torsion is lower than the limit value of 0,05. Therefore torsion is considered as insignificant and is ignored in the combined checks.

### Combined bending, axial force and shear force check

According to EN 1993-1-1 article 6.2.9.1 and formula (6.31)

|  |                 |        |     |
|--|-----------------|--------|-----|
| Resultant bending moment                                 | $M_{resultant}$ | 33,18  | kNm |
| Resultant shear force                                    | $V_{resultant}$ | 7,99   | kN  |
| Design plastic moment resistance reduced due to $N_{Ed}$ | $M_{N,Rd}$      | 188,62 | kNm |
| Unity check  |                 | 0,18   | -   |

$$n = \frac{|N_{Ed}|}{N_{pl,Rd}} = \frac{|-133,06[\text{kN}]|}{2880,11[\text{kN}]} = 0,05$$

$$M_{N,Rd} = M_{pl,Rd} \times (1 - n^{1,7}) = 189,64[\text{kNm}] \times (1 - 0,05^{1,7}) = 188,62[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{resultant}|}{M_{N,Rd}} = \frac{|33,18[\text{kNm}]|}{188,62[\text{kNm}]} = \mathbf{0,18} \leq \mathbf{1,00}$$

**Note:** The resultant internal forces are used for CHS sections.

**Note:** Since the shear forces are less than half the plastic shear resistances their effect on the moment resistances is neglected.

The member satisfies the section check.

### ....:STABILITY CHECK:....

#### Classification for member buckling design

Decisive position for stability classification: 0,000 m

Decisive utilisation factor  $\eta$ : 0,19

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d<br>[mm] | t<br>[mm] | d/t<br>[-] | Class 1 Limit<br>[-] | Class 2 Limit<br>[-] | Class 3 Limit<br>[-] | Class |
|-----------|-----------|------------|----------------------|----------------------|----------------------|-------|
| 219       | 13        | 17,5       | 33,1                 | 46,3                 | 59,6                 | 1     |

The cross-section is classified as Class 1

**Note:** The decisive position for the stability classification is based on the utilisation factor  $\eta$  according to Semi-Comp+.

#### Flexural Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

| Buckling parameters  |                   | yy     | zz     |    |
|----------------------|-------------------|--------|--------|----|
| Sway type            |                   | sway   | sway   |    |
| System length        | L                 | 8,000  | 8,000  | m  |
| Buckling factor      | k                 | 2,00   | 2,00   |    |
| Buckling length      | $l_{cr}$          | 16,000 | 16,000 | m  |
| Critical Euler load  | $N_{cr}$          | 351,74 | 351,74 | kN |
| Slenderness          | $\lambda$         | 218,64 | 218,64 |    |
| Relative slenderness | $\lambda_{rel}$   | 2,86   | 2,86   |    |
| Limit slenderness    | $\lambda_{rel,0}$ | 0,20   | 0,20   |    |



| Buckling parameters |            | yy     | zz     |    |
|---------------------|------------|--------|--------|----|
| Buckling curve      |            | c      | c      |    |
| Imperfection        | $\alpha$   | 0,49   | 0,49   |    |
| Reduction factor    | $\chi$     | 0,10   | 0,10   |    |
| Buckling resistance | $N_{b,Rd}$ | 271,52 | 271,52 | kN |

| Flexural Buckling verification |            |            |                |
|--------------------------------|------------|------------|----------------|
| Cross-section area             | A          | 8,1130e-03 | m <sup>2</sup> |
| Buckling resistance            | $N_{b,Rd}$ | 271,52     | kN             |
| Unity check                    |            | 0,49       | -              |

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,000[\text{m}]^2} = 351,74[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,000[\text{m}]^2} = 351,74[\text{kN}]$$

$$\lambda_y = \frac{l_{cr,y}}{i_y} = \frac{16,000[\text{m}]}{73[\text{mm}]} = 218,64$$

$$\lambda_z = \frac{l_{cr,z}}{i_z} = \frac{16,000[\text{m}]}{73[\text{mm}]} = 218,64$$

$$\lambda_{rel,y} = \frac{\lambda_y}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{218,64}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 2,86$$

$$\lambda_{rel,z} = \frac{\lambda_z}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{218,64}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 2,86$$

$$\varphi_y = 0,5 \times [1 + \alpha_y \times (\lambda_{rel,y} - \lambda_{rel,y,0}) + \lambda_{rel,y}^2] = 0,5 \times [1 + 0,49 \times (2,86 - 0,20) + 2,86^2] = 5,25$$

$$\varphi_z = 0,5 \times [1 + \alpha_z \times (\lambda_{rel,z} - \lambda_{rel,z,0}) + \lambda_{rel,z}^2] = 0,5 \times [1 + 0,49 \times (2,86 - 0,20) + 2,86^2] = 5,25$$

$$\chi_y = \min\left(\frac{1}{\varphi_y + \sqrt{\varphi_y^2 - \lambda_{rel,y}^2}}, 1\right) = \min\left(\frac{1}{5,25 + \sqrt{5,25^2 - 2,86^2}}, 1\right) = \min(0,10,1) = 0,10$$

$$\chi_z = \min\left(\frac{1}{\varphi_z + \sqrt{\varphi_z^2 - \lambda_{rel,z}^2}}, 1\right) = \min\left(\frac{1}{5,25 + \sqrt{5,25^2 - 2,86^2}}, 1\right) = \min(0,10,1) = 0,10$$

$$N_{b,y,Rd} = \frac{\chi_y \times A \times f_y}{\gamma_{M1}} = \frac{0,10 \times 8,1130 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 271,52[\text{kN}]$$

$$N_{b,z,Rd} = \frac{\chi_z \times A \times f_y}{\gamma_{M1}} = \frac{0,10 \times 8,1130 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 271,52[\text{kN}]$$

$$N_{b,Rd} = \min(N_{b,y,Rd}, N_{b,z,Rd}) = \min(271,52[\text{kN}], 271,52[\text{kN}]) = 271,52[\text{kN}]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{b,Rd}} = \frac{|-133,06[\text{kN}]|}{271,52[\text{kN}]} = 0,49 \leq 1,00$$

### Torsional(-Flexural) Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

**Note:** The cross-section concerns a CHS section which is not susceptible to Torsional(-Flexural) Buckling.

### Lateral Torsional Buckling check

According to EN 1993-1-1 article 6.3.2.1

**Note:** The cross-section concerns a CHS section which is not susceptible to Lateral Torsional Buckling.

### Bending and axial compression check

According to EN 1993-1-1 article 6.3.3 and formula (6.61),(6.62)

| Bending and axial compression check parameters |                   |                      |                |
|--|-------------------|----------------------|----------------|
| Interaction method                             |                   | alternative method 1 |                |
| Cross-section area                             | A                 | 8,1130e-03           | m <sup>2</sup> |
| Plastic section modulus                        | W <sub>pl,y</sub> | 5,3420e-04           | m <sup>3</sup> |
| Plastic section modulus                        | W <sub>pl,z</sub> | 5,3420e-04           | m <sup>3</sup> |
| Design compression force                       | N <sub>Ed</sub>   | 133,06               | kN             |
| Design bending moment (maximum)                | M <sub>y,Ed</sub> | -31,75               | kNm            |
| Design bending moment (maximum)                | M <sub>z,Ed</sub> | -11,31               | kNm            |
| Characteristic compression resistance          | N <sub>Rk</sub>   | 2880,11              | kN             |
| Characteristic moment resistance               | M <sub>y,Rk</sub> | 189,64               | kNm            |
| Characteristic moment resistance               | M <sub>z,Rk</sub> | 189,64               | kNm            |
| Reduction factor                               | χ <sub>y</sub>    | 0,10                 |                |
| Reduction factor                               | χ <sub>z</sub>    | 0,10                 |                |
| Reduction factor                               | χ <sub>LT</sub>   | 1,00                 |                |
| Interaction factor                             | k <sub>yy</sub>   | 1,87                 |                |
| Interaction factor                             | k <sub>yz</sub>   | 0,30                 |                |
| Interaction factor                             | k <sub>zy</sub>   | 1,87                 |                |
| Interaction factor                             | k <sub>zz</sub>   | 0,47                 |                |

Maximum moment M<sub>y,Ed</sub> is derived from beam B5633 position 0,000 m.

Maximum moment M<sub>z,Ed</sub> is derived from beam B5633 position 8,000 m.

| Interaction method 1 parameters                       |                        |                            |                |
|---|------------------------|----------------------------|----------------|
| Critical Euler load                                   | N <sub>cr,y</sub>      | 351,74                     | kN             |
| Critical Euler load                                   | N <sub>cr,z</sub>      | 351,74                     | kN             |
| Elastic critical load                                 | N <sub>cr,T</sub>      | 655280,77                  | kN             |
| Plastic section modulus                               | W <sub>pl,y</sub>      | 5,3420e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,y</sub>      | 3,9658e-04                 | m <sup>3</sup> |
| Plastic section modulus                               | W <sub>pl,z</sub>      | 5,3420e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,z</sub>      | 3,9658e-04                 | m <sup>3</sup> |
| Second moment of area                                 | I <sub>y</sub>         | 4,3446e-05                 | m <sup>4</sup> |
| Second moment of area                                 | I <sub>z</sub>         | 4,3446e-05                 | m <sup>4</sup> |
| Torsional constant                                    | I <sub>t</sub>         | 8,6892e-05                 | m <sup>4</sup> |
| Method for equivalent moment factor C <sub>my,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>y,Ed</sub>      | -31,75                     | kNm            |
| Maximum relative deflection                           | δ <sub>z</sub>         | -42,6                      | mm             |
| Equivalent moment factor                              | C <sub>my,0</sub>      | 1,34                       |                |
| Method for equivalent moment factor C <sub>mz,0</sub> |                        | Table A.2 Line 1 (Linear)  |                |
| Ratio of end moments                                  | ψ <sub>z</sub>         | -0,85                      |                |
| Equivalent moment factor                              | C <sub>mz,0</sub>      | 0,45                       |                |
| Factor  | μ <sub>y</sub>         | 0,65                       |                |
| Factor  | μ <sub>z</sub>         | 0,65                       |                |
| Factor  | ε <sub>y</sub>         | 4,88                       |                |
| Factor  | a <sub>LT</sub>        | 0,00                       |                |
| Critical moment for uniform bending                   | M <sub>cr,0</sub>      | 3142,36                    | kNm            |
| Relative slenderness                                  | λ <sub>rel,0</sub>     | 0,25                       |                |
| Limit relative slenderness                            | λ <sub>rel,0,lim</sub> | 0,29                       |                |
| Equivalent moment factor                              | C <sub>my</sub>        | 1,34                       |                |
| Equivalent moment factor                              | C <sub>mz</sub>        | 0,45                       |                |
| Equivalent moment factor                              | C <sub>mLT</sub>       | 1,00                       |                |
| Factor  | b <sub>LT</sub>        | 0,00                       |                |
| Factor  | c <sub>LT</sub>        | 0,00                       |                |
| Factor  | d <sub>LT</sub>        | 0,00                       |                |
| Factor  | e <sub>LT</sub>        | 0,00                       |                |
| Factor  | w <sub>y</sub>         | 1,35                       |                |
| Factor  | w <sub>z</sub>         | 1,35                       |                |

| Interaction method 1 parameters |                     |      |
|---------------------------------|---------------------|------|
| Factor                          | $n_{pl}$            | 0,05 |
| Maximum relative slenderness    | $\lambda_{rel,max}$ | 2,86 |
| Factor                          | $C_{yy}$            | 0,74 |
| Factor                          | $C_{yz}$            | 0,94 |
| Factor                          | $C_{zy}$            | 0,45 |
| Factor                          | $C_{zz}$            | 0,99 |

$$\text{Unity check (6.61)} = 0,49 + 0,34 + 0,02 = 0,85 -$$

$$\text{Unity check (6.62)} = 0,49 + 0,34 + 0,03 = 0,87 -$$

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,000[\text{m}]^2} = 351,74[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,000[\text{m}]^2} = 351,74[\text{kN}]$$

$$N_{cr,T} = \frac{1}{i_0^2} \times \left( G \times I_t + \frac{\pi^2 \times E \times I_w}{l_{cr}^2} \right) = \frac{1}{103[\text{mm}]^2} \times \left( 80769,2[\text{MPa}] \times 8,6892 \cdot 10^{-5}[\text{m}^4] + \frac{\pi^2 \times 210000,0[\text{MPa}] \times 8,8785 \cdot 10^{-40}[\text{m}^6]}{8,000[\text{m}]^2} \right) = 655280,77[\text{kN}]$$

$$C_{m,y,0} = 1 + \left( \frac{\pi^2 \times E \times I_y \times |\delta_z|}{L^2 \times |M_{y,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,y}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4] \times |-42,6[\text{mm}]|}{8,000[\text{m}]^2 \times |-31,75[\text{kNm}]|} - 1 \right) \times \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]} = 1,34$$

$$C_{m,z,0} = 0,79 + 0,21 \times \psi_z + \frac{0,36 \times (\psi_z - 0,33) \times |N_{Ed}|}{N_{cr,z}} = 0,79 + 0,21 \times -0,85 + \frac{0,36 \times (-0,85 - 0,33) \times |133,06[\text{kN}]|}{351,74[\text{kN}]} = 0,45$$

$$\mu_y = \frac{1 - \frac{|N_{Ed}|}{N_{cr,y}}}{1 - \frac{\chi_y \times |N_{Ed}|}{N_{cr,y}}} = \frac{1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]}}{1 - \frac{0,10 \times |133,06[\text{kN}]|}{351,74[\text{kN}]}} = 0,65$$

$$\mu_z = \frac{1 - \frac{|N_{Ed}|}{N_{cr,z}}}{1 - \frac{\chi_z \times |N_{Ed}|}{N_{cr,z}}} = \frac{1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]}}{1 - \frac{0,10 \times |133,06[\text{kN}]|}{351,74[\text{kN}]}} = 0,65$$

$$\varepsilon_y = \left| \frac{M_{y,Ed}}{N_{Ed}} \right| \times \frac{A}{W_{el,y}} = \left| \frac{-31,75[\text{kNm}]}{133,06[\text{kN}]} \right| \times \frac{8,1130 \cdot 10^{-3}[\text{m}^2]}{3,9658 \cdot 10^{-4}[\text{m}^3]} = 4,88$$

$$a_{LT} = \max \left( 1 - \frac{I_t}{I_y}, 0 \right) = \max \left( 1 - \frac{8,6892 \cdot 10^{-5}[\text{m}^4]}{4,3446 \cdot 10^{-5}[\text{m}^4]}, 0 \right) = \max(-1,00, 0,00) = 0,00$$

$$M_{cr,0} = \frac{C_1 \times \pi^2 \times E \times I_z}{(k \times l_{LT})^2} \times \left[ \sqrt{\frac{\left( \frac{k}{k_w} \right)^2 \times I_w}{I_z} + \frac{(k \times l_{LT})^2 \times G \times I_t}{\pi^2 \times E \times I_z} + (C_2 \times z_g - C_3 \times z_y)^2} - (C_2 \times z_g - C_3 \times z_y) \right]$$

$$= \frac{1,00 \times \pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{(1,00 \times 8,000[\text{m}])^2} \times \left[ \sqrt{\frac{\left( \frac{1,00}{1,00} \right)^2 \times 8,8785 \cdot 10^{-40}[\text{m}^6]}{4,3446 \cdot 10^{-5}[\text{m}^4]} + \frac{(1,00 \times 8,000[\text{m}])^2 \times 80769,2[\text{MPa}] \times 8,6892 \cdot 10^{-5}[\text{m}^4]}{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]} + (0,02 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])^2} - (0,02 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])} \right]$$

$$= 3142,36[\text{kNm}]$$

$$\lambda_{rel,0} = \sqrt{\frac{W_{pl,y} \times f_y}{M_{cr,0}}} = \sqrt{\frac{5,3420 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{3142,36[\text{kNm}]} = 0,25$$

$$\lambda_{rel,0,lim} = 0,2 \times \sqrt{C_1} \times \sqrt[4]{\left( 1 - \frac{|N_{Ed}|}{N_{cr,z}} \right) \times \left( 1 - \frac{|N_{Ed}|}{N_{cr,T}} \right)} = 0,2 \times \sqrt{2,65} \times \sqrt[4]{\left( 1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]} \right) \times \left( 1 - \frac{|133,06[\text{kN}]|}{655280,77[\text{kN}]} \right)} = 0,29$$

$$C_{my} = C_{my,0} = 1,34$$

$$C_{mz} = C_{mz,0} = 0,45$$

$$C_{mLT} = 1,00$$

$$b_{LT} = 0,5 \times a_{LT} \times \lambda_{rel,0}^2 \times \frac{|M_{y,Ed}|}{\chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = 0,5 \times 0,00 \times 0,25^2 \times \frac{|-31,75[\text{kNm}]|}{1,00 \times 189,64[\text{kNm}]} \times \frac{|-11,31[\text{kNm}]|}{189,64[\text{kNm}]} = 0,00$$

$$c_{LT} = 10 \times a_{LT} \times \frac{\lambda_{rel,0}^2}{5 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 10 \times 0,00 \times \frac{0,25^2}{5 + 2,86^4} \times \frac{|-31,75[\text{kNm}]|}{1,34 \times 1,00 \times 189,64[\text{kNm}]} = 0,00$$

$$d_{LT} = 2 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{C_{mz} \times M_{pl,z,Rd}}$$

$$= 2 \times 0,00 \times \frac{0,25}{0,1 + 2,86^4} \times \frac{|-31,75[\text{kNm}]|}{1,34 \times 1,00 \times 189,64[\text{kNm}]} \times \frac{|-11,31[\text{kNm}]|}{0,45 \times 189,64[\text{kNm}]} = 0,00$$

$$e_{LT} = 1,7 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 1,7 \times 0,00 \times \frac{0,25}{0,1 + 2,86^4} \times \frac{|-31,75[\text{kNm}]|}{1,34 \times 1,00 \times 189,64[\text{kNm}]} = 0,00$$

$$w_y = \min \left( \frac{W_{pl,y}}{W_{el,y}}, 1,5 \right) = \min \left( \frac{5,3420 \cdot 10^{-4}[\text{m}^3]}{3,9658 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,35, 1,50) = 1,35$$

$$w_z = \min \left( \frac{W_{pl,z}}{W_{el,z}}, 1,5 \right) = \min \left( \frac{5,3420 \cdot 10^{-4}[\text{m}^3]}{3,9658 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,35, 1,50) = 1,35$$

$$n_{pl} = \frac{|N_{Ed}|}{\gamma_{M1} N_{Rk}} = \frac{|133,06[\text{kN}]|}{1,10 \cdot 2880,11[\text{kN}]} = 0,05$$

$$\lambda_{rel,max} = \max(\lambda_{rel,y}, \lambda_{rel,z}) = \max(2,86, 2,86) = 2,86$$

$$C_{yy} = \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max} - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max}^2 \right) \times n_{pl} - b_{LT} \right], \frac{W_{el,y}}{W_{pl,y}} \right\}$$

$$= \max \left\{ 1 + (1,35 - 1) \times \left[ \left( 2 - \frac{1,6}{1,35} \times 1,34^2 \times 2,86 - \frac{1,6}{1,35} \times 1,34^2 \times 2,86^2 \right) \times 0,05 - 0,00 \right], \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,62, 0,74\}$$

$$= 0,74$$

$$C_{yz} = \max \left\{ 1 + (w_z - 1) \times \left[ \left( 2 - 14 \times \frac{C_{mz}^2 \times \lambda_{rel,max}^2}{w_z^5} \right) \times n_{pl} - c_{LT} \right], 0,6 \times \sqrt{\frac{w_z}{w_y}} \times \frac{W_{el,z}}{W_{pl,z}} \right\}$$

$$= \max \left\{ 1 + (1,35 - 1) \times \left[ \left( 2 - 14 \times \frac{0,45^2 \times 2,86^2}{1,35^5} \right) \times 0,05 - 0,00 \right], 0,6 \times \sqrt{\frac{1,35}{1,35}} \times \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,94, 0,45\} = 0,94$$

$$C_{zy} = \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - 14 \times \frac{C_{my}^2 \times \lambda_{rel,max}^2}{w_y^5} \right) \times n_{pl} - d_{LT} \right], 0,6 \times \sqrt{\frac{w_y}{w_z}} \times \frac{W_{el,y}}{W_{pl,y}} \right\}$$

$$= \max \left\{ 1 + (1,35 - 1) \times \left[ \left( 2 - 14 \times \frac{1,34^2 \times 2,86^2}{1,35^5} \right) \times 0,05 - 0,00 \right], 0,6 \times \sqrt{\frac{1,35}{1,35}} \times \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,22, 0,45\} = 0,45$$

$$C_{zz} = \max \left[ 1 + (w_z - 1) \times \left( 2 - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max} - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max}^2 - e_{LT} \right) \times n_{pl}, \frac{W_{el,z}}{W_{pl,z}} \right]$$

$$= \max \left[ 1 + (1,35 - 1) \times \left( 2 - \frac{1,6}{1,35} \times 0,45^2 \times 2,86 - \frac{1,6}{1,35} \times 0,45^2 \times 2,86^2 - 0,00 \right) \times 0,05, \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right] = \max[0,99, 0,74] = 0,99$$

$$N_{Rk} = A \times f_y = 8,1130 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}] = 2880,11[\text{kN}]$$

$$M_{y,Rk} = W_{pl,y} \times f_y = 5,3420 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}] = 189,64[\text{kNm}]$$

$$M_{z,Rk} = W_{pl,z} \times f_y = 5,3420 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}] = 189,64[\text{kNm}]$$

$$k_{yy} = C_{my} \times C_{mLT} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{yy}} = 1,34 \times 1,00 \times \frac{0,65}{1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]}} \times \frac{1}{0,74} = 1,87$$

$$k_{yz} = C_{mz} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{yz}} \times 0,6 \times \sqrt{\frac{w_z}{w_y}} = 0,45 \times \frac{0,65}{1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]}} \times \frac{1}{0,94} \times 0,6 \times \sqrt{\frac{1,35}{1,35}} = 0,30$$

$$k_{zy} = C_{my} \times C_{mLT} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{zy}} \times 0,6 \times \sqrt{\frac{w_y}{w_z}} = 1,34 \times 1,00 \times \frac{0,65}{1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]}} \times \frac{1}{0,45} \times 0,6 \times \sqrt{\frac{1,35}{1,35}} = 1,87$$

$$k_{zz} = C_{mz} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{zz}} = 0,45 \times \frac{0,65}{1 - \frac{|133,06[\text{kN}]|}{351,74[\text{kN}]}} \times \frac{1}{0,99} = 0,47$$


$$\begin{aligned} \text{Unity check (6.61)} &= \frac{|N_{Ed}|}{\chi_y \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{yy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{yz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\ &= \frac{|133,06[\text{kN}]|}{0,10 \times \frac{2880,11[\text{kN}]}{1,10}} + 1,87 \times \frac{|-31,75[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{189,64[\text{kNm}]}{1,10}} + 0,30 \times \frac{|-11,31[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{189,64[\text{kNm}]}{1,10}} = \mathbf{0,85} \leq \mathbf{1,00} \end{aligned}$$

$$\begin{aligned} \text{Unity check (6.62)} &= \frac{|N_{Ed}|}{\chi_z \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{zy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{zz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\ &= \frac{|133,06[\text{kN}]|}{0,10 \times \frac{2880,11[\text{kN}]}{1,10}} + 1,87 \times \frac{|-31,75[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{189,64[\text{kNm}]}{1,10}} + 0,47 \times \frac{|-11,31[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{189,64[\text{kNm}]}{1,10}} = \mathbf{0,87} \leq \mathbf{1,00} \end{aligned}$$

$$\text{Unity check} = \max(\text{Unity check (6.61)}, \text{Unity check (6.62)}) = \max(0,85, 0,87) = \mathbf{0,87} \leq \mathbf{1,00}$$

The member satisfies the stability check.


### 4.2.3. Granično stanje uporabljivosti

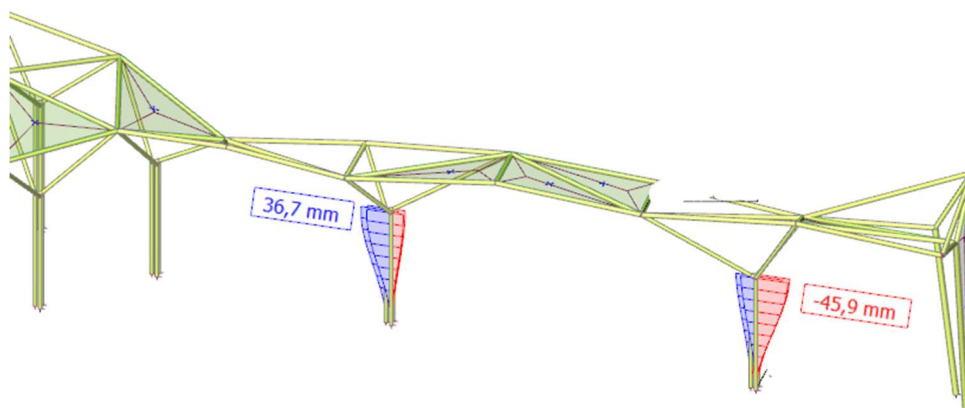

Slika 68: Prikaz pomaka trostrukih stupova „S1“ (mm)

|                                | $u_z$               |
|--------------------------------|---------------------|
| Maksimalni pomak $u =$         | 45,9 mm             |
| Duljina nosača $L =$           | 8,00 m              |
| Dopušteni pomak $f_{p,dop.} =$ | 53,3 mm ( $L/200$ ) |

$$f_{max.} = 45,9 \text{ mm} < f_{p,dop.} = 53,3 \text{ mm}$$

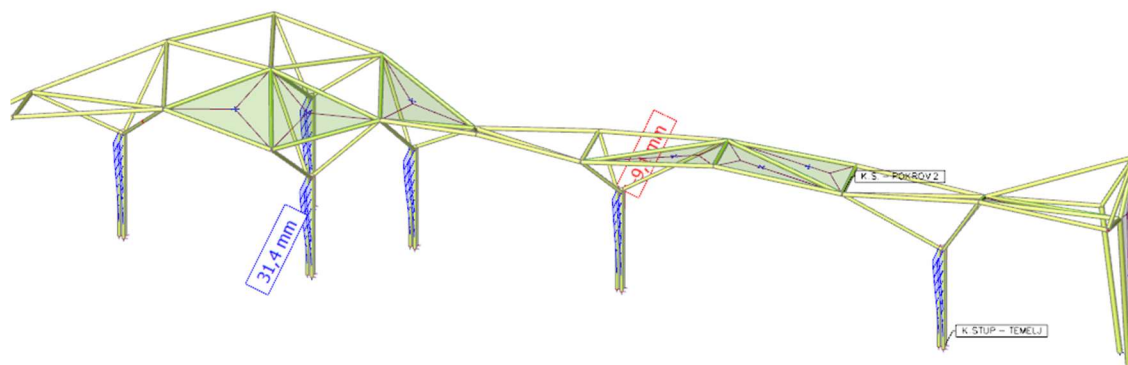


Slika 69: Prikaz pomaka trostrukih stupova „S1“ (mm)

|                                | $u_z$               |
|--------------------------------|---------------------|
| Maksimalni pomak $u =$         | 31,4 mm             |
| Duljina nosača $L =$           | 8,00 m              |
| Dopušteni pomak $f_{p,dop.} =$ | 53,3 mm ( $L/200$ ) |


$$f_{max.} = 31,4 \text{ mm} < f_{p,dop.} = 53,3 \text{ mm}$$

### 4.3. Kosi dio trostrukih stupova „SK“


#### 4.3.1. Rezne sile kosog dijela stupa „S1“

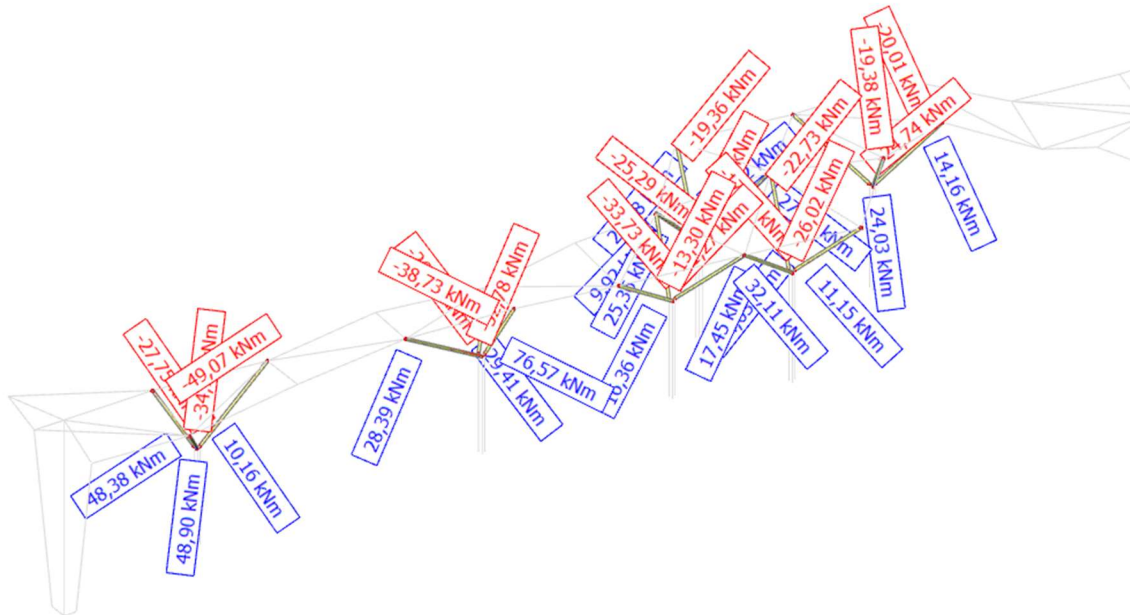


Slika 70: Moment savijanja  $M_y$ (kNm)- kosi dio trostrukog stupa „SK“ od osi N1 do N7

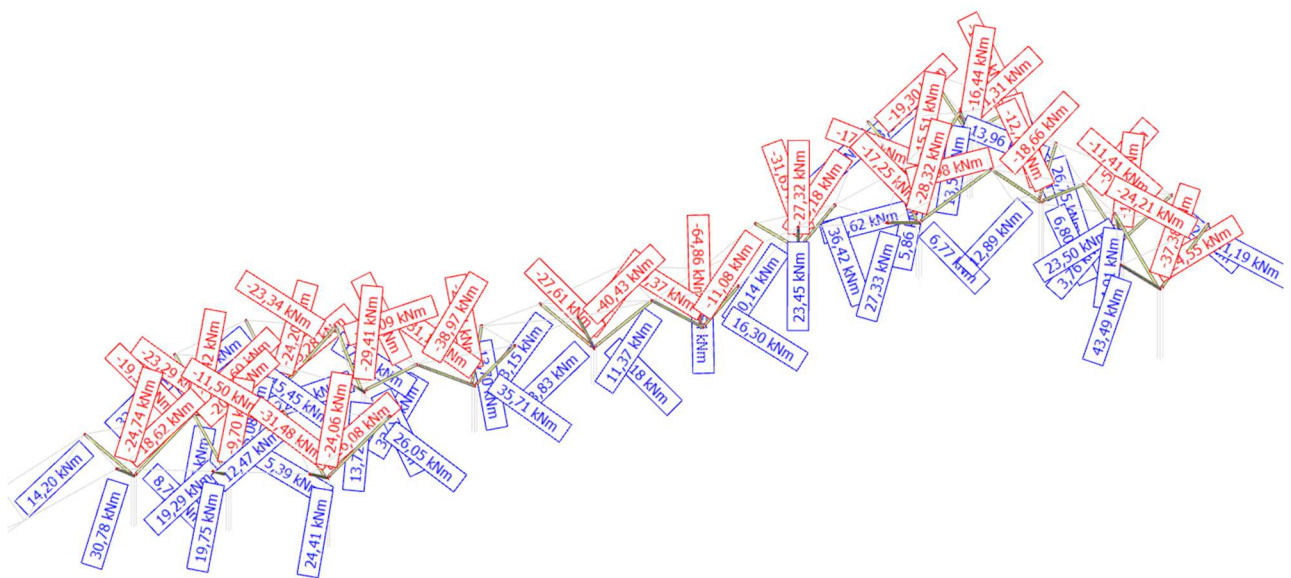

Slika 71: Moment savijanja  $M_y$ (kNm)- kosi dio trostrukog stupa „SK“ od osi N13 do N27

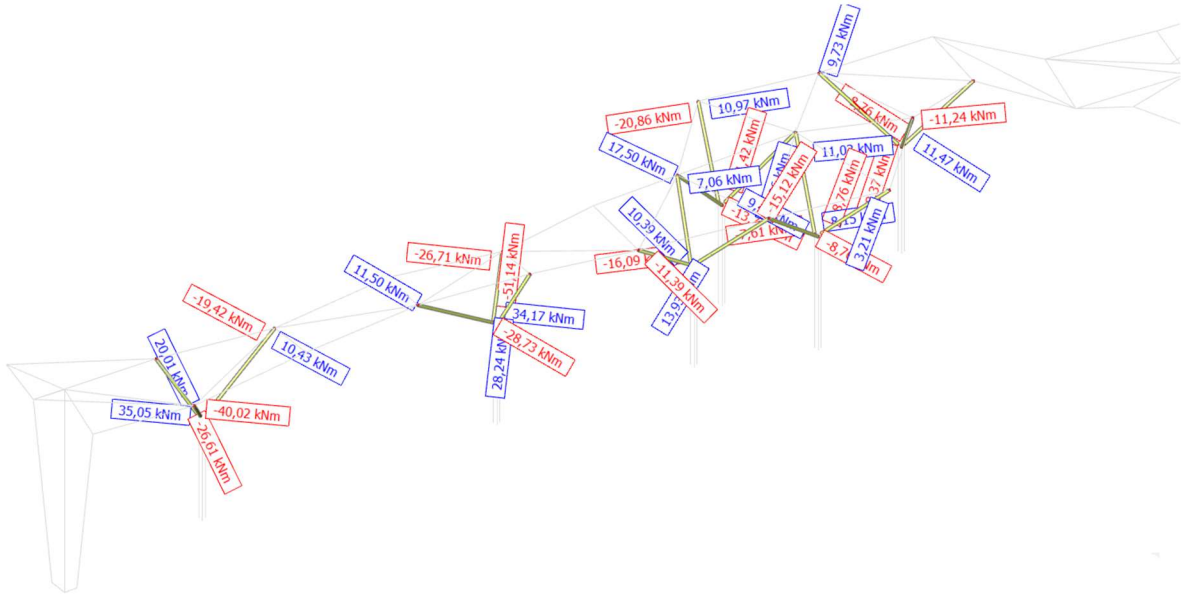


Slika 73: Moment savijanja  $M_z$ (kNm)- kosi dio trostrukog stupa „SK“ od osi N1 do N7

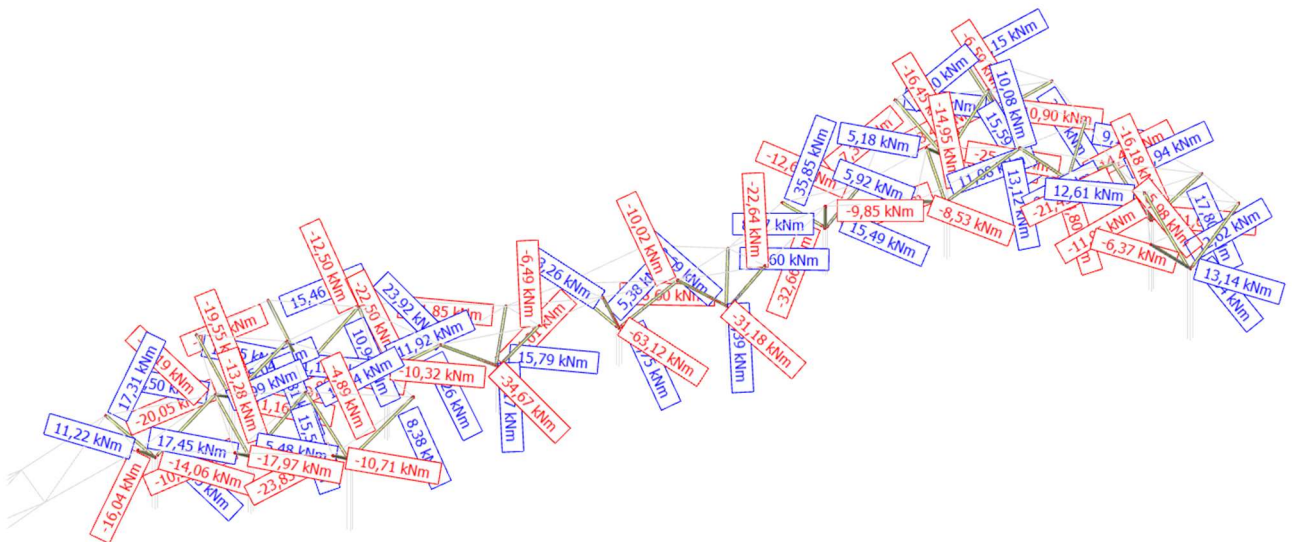


Slika 74: Moment savijanja  $M_z$ (kNm)- kosi dio trostrukog stupa „SK“ od osi N13 do N27




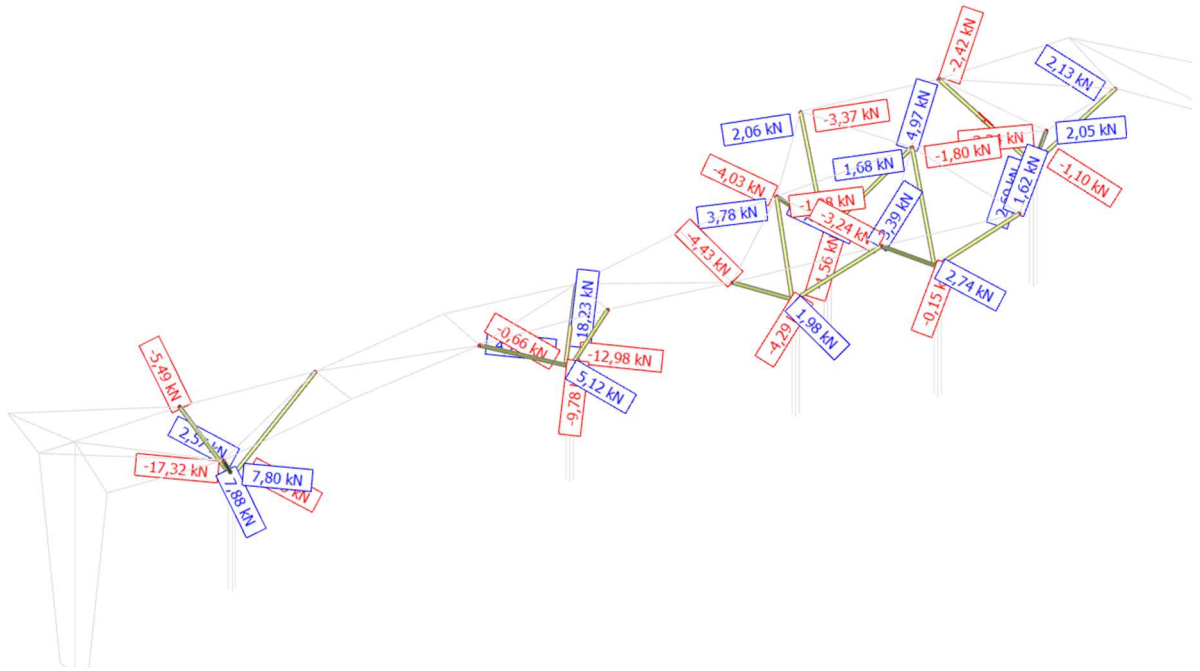


Slika 75: Poprečna sila  $V_y$  (kN)- kosi dio trostrukog stupa „SK“ od osi N1 do osi N7

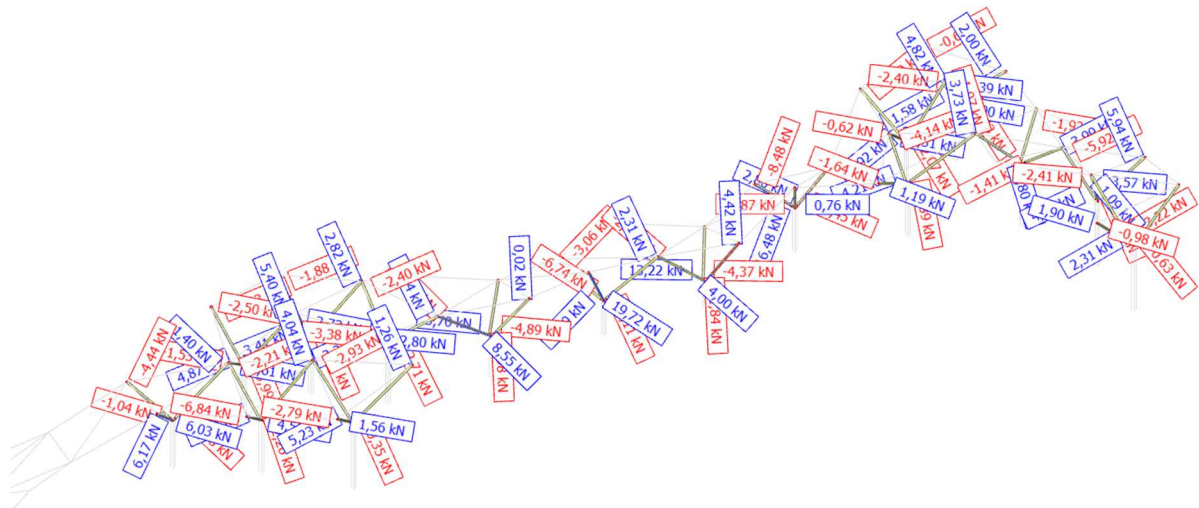


Slika 76: Poprečna sila  $V_y$  (kN)- kosi dio trostrukog stupa „SK“ od osi N13 do N27

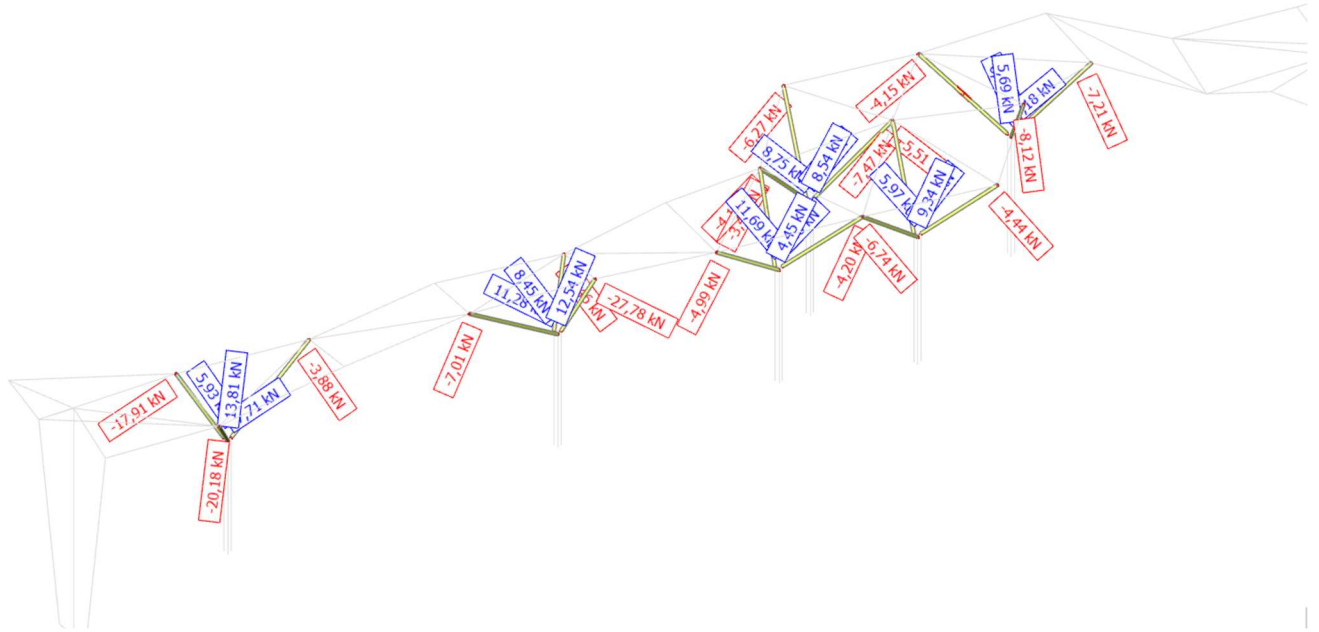


Slika 77: Poprečna sila  $V_z$ (kN)- kosi dio trostrukog stupa „SK“ od osi N1 do osi N7

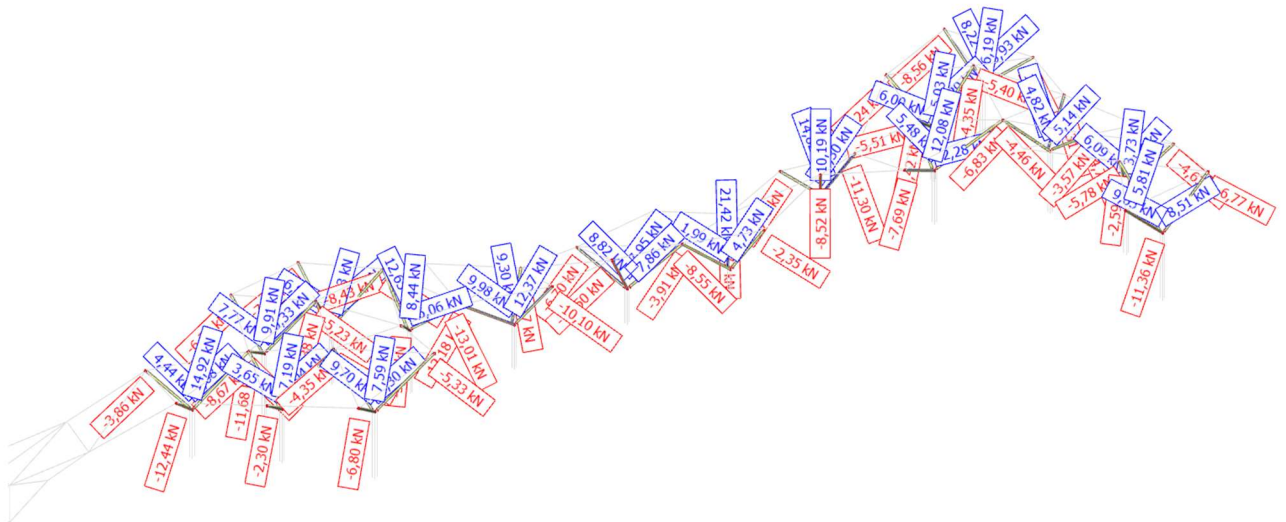

Slika 78: Poprečna sila  $V_z$ (kN)- kosi dio trostrukog stupa „SK“ od osi N13 do N27

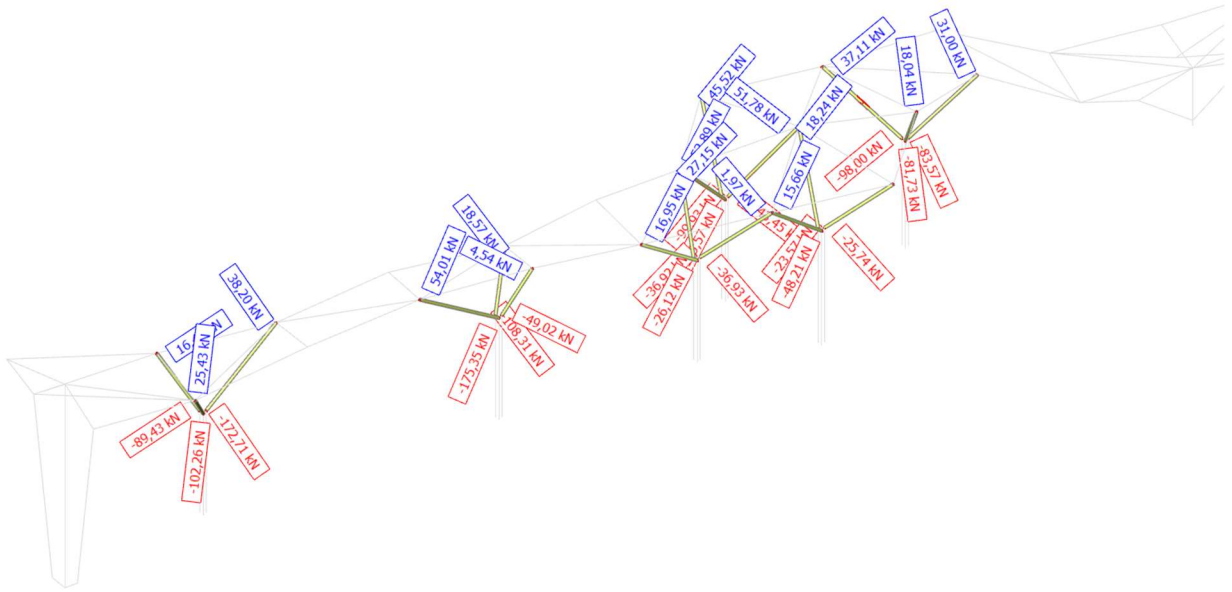


Slika 79: Uzdužna sila N(kN)- kosi dio trostrukog stupa „SK“ od osi N1 do osi N7

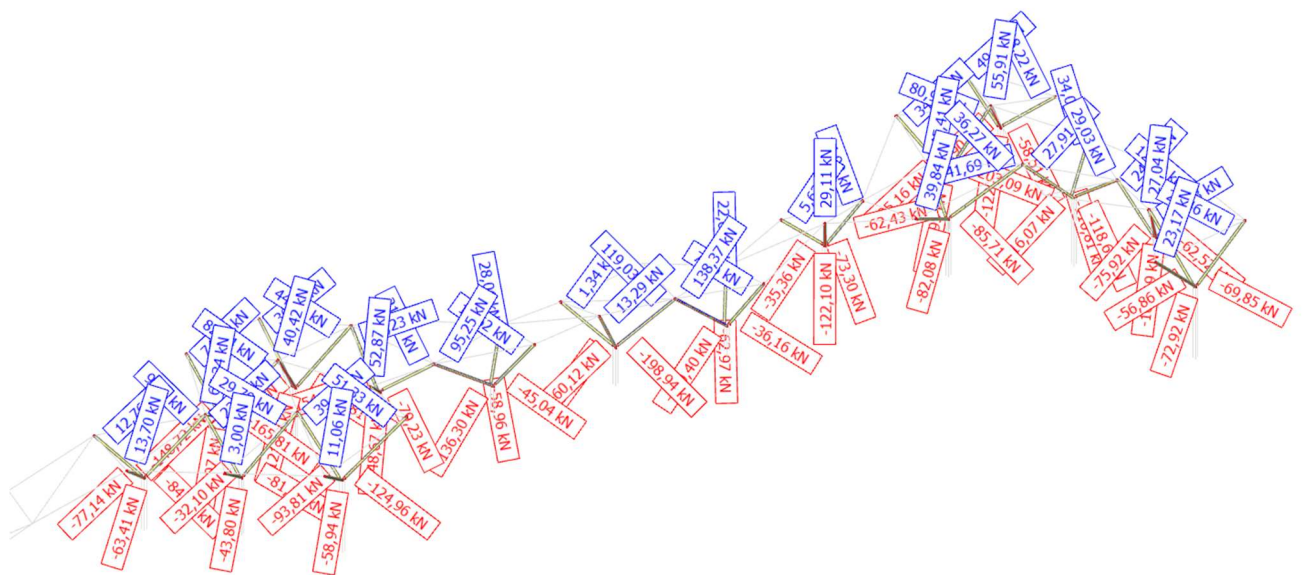


Slika 80: Uzdužna sila N(kN)- kosi dio trostrukog stupa „SK“ od osi N13 do osi N27

### 4.3.2. Dimenzioniranje kosog dijela stupa „S1“

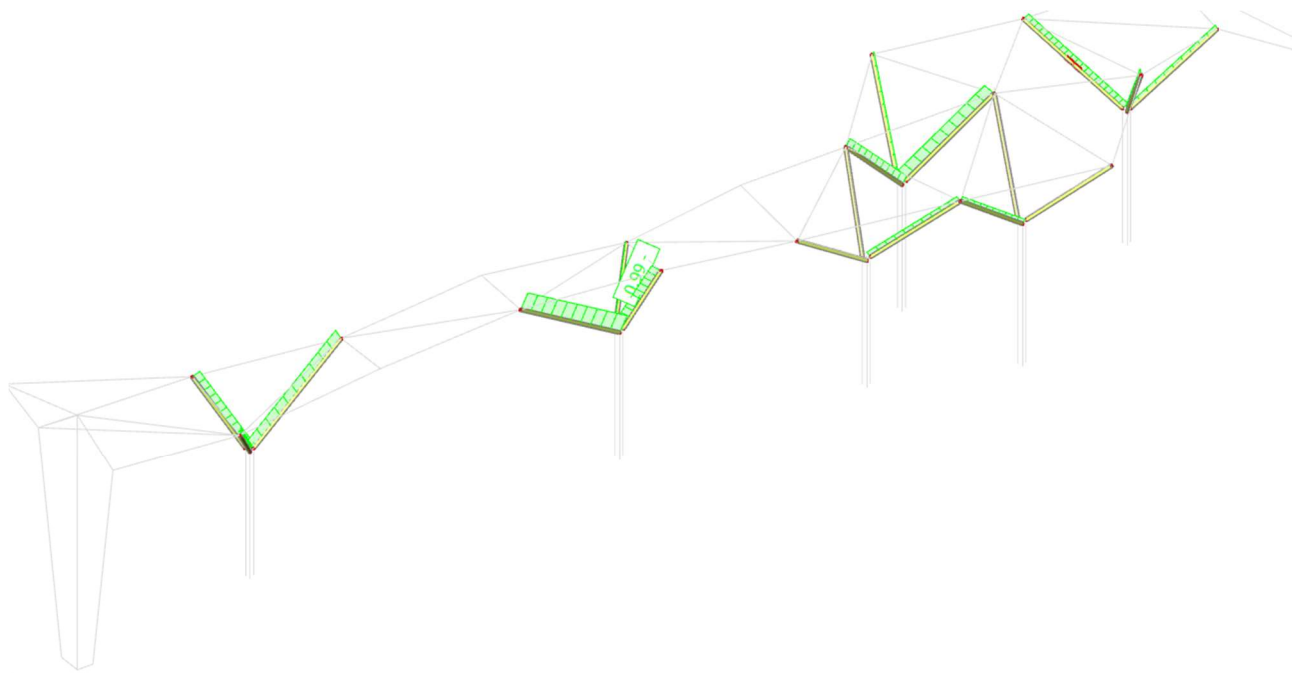

Slika 81: Prikaz iskoristivosti trostrukog stupa „S1“ od osi N1 do osi N7

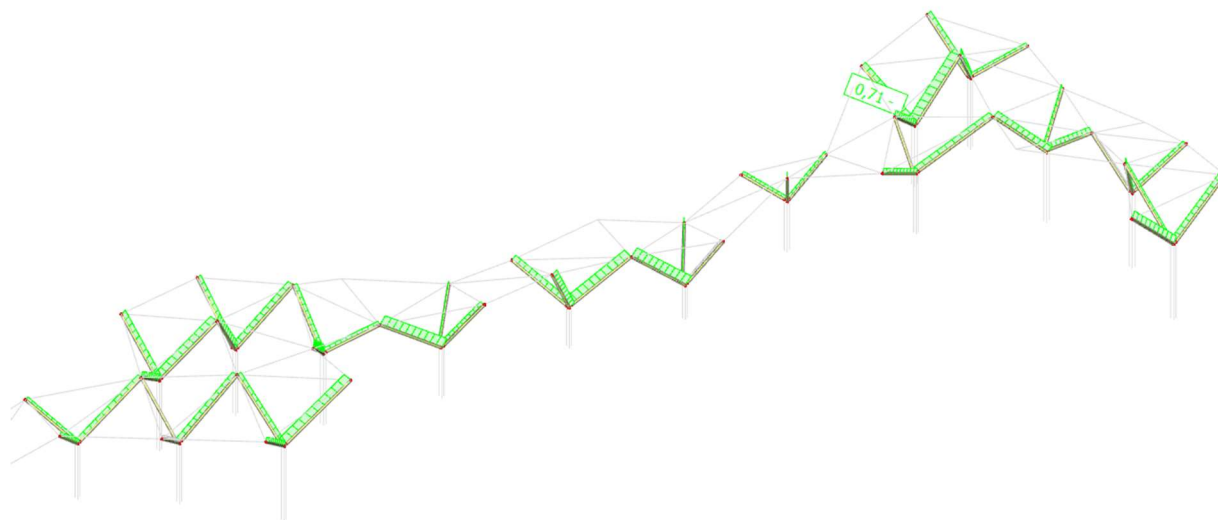

Slika 82: Prikaz iskoristivosti trostrukog stupa „S1“ od osi N13 do osi N27

## EC-EN 1993 Steel check ULS

Linear calculation  
 Combination: ULS-Set B (auto)  
 Coordinate system: Principal  
 Extreme 1D: Global  
 Selection: All

### EN 1993-1-1 Code Check

National annex: Standard EN

|                     |                        |                        |                    |              |                         |               |
|---------------------|------------------------|------------------------|--------------------|--------------|-------------------------|---------------|
| <b>Member B5700</b> | <b>0,000 / 8,489 m</b> | <b>CFCHS219.1X12.5</b> | <b>Cold formed</b> | <b>S 355</b> | <b>ULS-Set B (auto)</b> | <b>0,99 -</b> |
|---------------------|------------------------|------------------------|--------------------|--------------|-------------------------|---------------|

Note: EN 1993-1-3 article 1.1(3) specifies that this part does not apply to cold formed CHS and RHS sections. The default EN 1993-1-1 code check is executed instead of the EN 1993-1-3 code check.

| Combination key   |  |
|---|--|
| ULS-Set B (auto) / 1.35*G + 1.35*dg + 0.75*s + 0.90*w2(y) + 0.90*T- + 1.50*w3(pritisak) |  |

| Partial safety factors       |               |      |
|------------------------------|---------------|------|
| Resistance of cross-sections | $\gamma_{M0}$ | 1,00 |
| Resistance to instability    | $\gamma_{M1}$ | 1,10 |
| Resistance of net sections   | $\gamma_{M2}$ | 1,25 |

| Material          |       |       |     |
|-------------------|-------|-------|-----|
| Yield strength    | $f_y$ | 355,0 | MPa |
| Ultimate strength | $f_u$ | 490,0 | MPa |

....:SECTION CHECK:....

The critical check is on position **0,000 m**

| Internal forces |            | Calculated | Unit |
|-----------------|------------|------------|------|
| Normal force    | $N_{Ed}$   | -172,13    | kN   |
| Shear force     | $V_{y,Ed}$ | 4,58       | kN   |
| Shear force     | $V_{z,Ed}$ | 12,45      | kN   |
| Torsion         | $T_{Ed}$   | -3,94      | kNm  |
| Bending moment  | $M_{y,Ed}$ | -51,76     | kNm  |
| Bending moment  | $M_{z,Ed}$ | -26,69     | kNm  |

### Classification for cross-section design

Classification according to EN 1993-1-1 article 5.5.2  
 Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d [mm] | t [mm] | d/t [-] | Class 1 Limit [-] | Class 2 Limit [-] | Class 3 Limit [-] | Class |
|--------|--------|---------|-------------------|-------------------|-------------------|-------|
| 219    | 13     | 17,5    | 33,1              | 46,3              | 59,6              | 1     |

The cross-section is classified as Class 1

### Compression check

According to EN 1993-1-1 article 6.2.4 and formula (6.9)

|                        |            |            |                |
|------------------------|------------|------------|----------------|
| Cross-section area     | A          | 8,1130e-03 | m <sup>2</sup> |
| Compression resistance | $N_{c,Rd}$ | 2880,11    | kN             |
| Unity check            |            | 0,06       | -              |

$$N_{c,Rd} = \frac{A \times f_y}{\gamma_{M0}} = \frac{8,1130 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,00} = 2880,11 [kN]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{c,Rd}} = \frac{|-172,13 [kN]|}{2880,11 [kN]} = 0,06 \leq 1,00$$

**Bending moment check for  $M_y$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,y}$    | 5,3420e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,y,Rd}$ | 189,64     | kNm            |
| Unity check             |               | 0,27       | -              |

$$M_{pl,y,Rd} = \frac{W_{pl,y} \times f_y}{\gamma_{M0}} = \frac{5,3420 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 189,64 [kNm]$$

$$\text{Unity check} = \frac{|M_{y,Ed}|}{M_{pl,y,Rd}} = \frac{|-51,76 [kNm]|}{189,64 [kNm]} = 0,27 \leq 1,00$$

**Bending moment check for  $M_z$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,z}$    | 5,3420e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,z,Rd}$ | 189,64     | kNm            |
| Unity check             |               | 0,14       | -              |

$$M_{pl,z,Rd} = \frac{W_{pl,z} \times f_y}{\gamma_{M0}} = \frac{5,3420 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 189,64 [kNm]$$

$$\text{Unity check} = \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = \frac{|-26,69 [kNm]|}{189,64 [kNm]} = 0,14 \leq 1,00$$

**Shear check for  $V_y$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,1649e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_y$ | $V_{pl,y,Rd}$ | 1058,59    | kN             |
| Unity check                        |               | 0,00       | -              |

$$V_{pl,y,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,1649 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 1058,59 [kN]$$

$$\text{Unity check} = \frac{|V_{y,Ed}|}{V_{c,y,Rd}} = \frac{|4,58 [kN]|}{1058,59 [kN]} = 0,00 \leq 1,00$$

**Shear check for  $V_z$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,1649e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_z$ | $V_{pl,z,Rd}$ | 1058,59    | kN             |
| Unity check                        |               | 0,01       | -              |

$$V_{pl,z,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,1649 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 1058,59 [kN]$$

$$\text{Unity check} = \frac{|V_{z,Ed}|}{V_{c,z,Rd}} = \frac{|12,45 [kN]|}{1058,59 [kN]} = 0,01 \leq 1,00$$

**Torsion check**

According to EN 1993-1-1 article 6.2.7 and formula (6.23)

|                          |          |       |     |
|--------------------------|----------|-------|-----|
| Index of fibre           | Fibre    | 1     |     |
| Total torsional moment   | $T_{Ed}$ | 4,7   | MPa |
| Elastic shear resistance | $T_{Rd}$ | 205,0 | MPa |
| Unity check              |          | 0,02  | -   |

$$\tau_{Ed} = \left| \frac{T_{Ed}}{T_{Ed,unit}} \times \tau_{Ed,unit} \right| = \left| \frac{-3,94[\text{kNm}]}{1,00[\text{kNm}]} \times 1193,190[\text{kN/m}^2] \right| = 4,7[\text{MPa}]$$

$$\tau_{Rd} = \frac{f_y}{\sqrt{3} \times \gamma_{M0}} = \frac{355,0[\text{MPa}]}{\sqrt{3} \times 1,00} = 205,0[\text{MPa}]$$

$$\text{Unity check} = \frac{\tau_{Ed}}{\tau_{Rd}} = \frac{4,7[\text{MPa}]}{205,0[\text{MPa}]} = \mathbf{0,02} \leq \mathbf{1,00}$$

**Note:** The unity check for torsion is lower than the limit value of 0,05. Therefore torsion is considered as insignificant and is ignored in the combined checks.

### Combined bending, axial force and shear force check

According to EN 1993-1-1 article 6.2.9.1 and formula (6.31)

|  |                 |        |     |
|--|-----------------|--------|-----|
| Resultant bending moment                                 | $M_{resultant}$ | 58,23  | kNm |
| Resultant shear force                                    | $V_{resultant}$ | 13,26  | kN  |
| Design plastic moment resistance reduced due to $N_{Ed}$ | $M_{N,Rd}$      | 188,06 | kNm |
| Unity check  |                 | 0,31   | -   |

$$n = \frac{|N_{Ed}|}{N_{pl,Rd}} = \frac{|-172,13[\text{kN}]|}{2880,11[\text{kN}]} = 0,06$$

$$M_{N,Rd} = M_{pl,Rd} \times (1 - n^{1,7}) = 189,64[\text{kNm}] \times (1 - 0,06^{1,7}) = 188,06[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{resultant}|}{M_{N,Rd}} = \frac{|58,23[\text{kNm}]|}{188,06[\text{kNm}]} = \mathbf{0,31} \leq \mathbf{1,00}$$

**Note:** The resultant internal forces are used for CHS sections.

**Note:** Since the shear forces are less than half the plastic shear resistances their effect on the moment resistances is neglected.

The member satisfies the section check.

### ....:STABILITY CHECK:....

#### Classification for member buckling design

Decisive position for stability classification: 0,000 m

Decisive utilisation factor  $\eta$ : 0,33

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d<br>[mm] | t<br>[mm] | d/t<br>[-] | Class 1 Limit<br>[-] | Class 2 Limit<br>[-] | Class 3 Limit<br>[-] | Class |
|-----------|-----------|------------|----------------------|----------------------|----------------------|-------|
| 219       | 13        | 17,5       | 33,1                 | 46,3                 | 59,6                 | 1     |

The cross-section is classified as Class 1

**Note:** The decisive position for the stability classification is based on the utilisation factor  $\eta$  according to Semi-Comp+.

#### Flexural Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

| Buckling parameters  |                   | yy     | zz       |    |
|----------------------|-------------------|--------|----------|----|
| Sway type            |                   | sway   | non-sway |    |
| System length        | L                 | 8,489  | 8,489    | m  |
| Buckling factor      | k                 | 2,00   | 2,00     |    |
| Buckling length      | $l_{cr}$          | 16,979 | 16,979   | m  |
| Critical Euler load  | $N_{cr}$          | 312,36 | 312,36   | kN |
| Slenderness          | $\lambda$         | 232,02 | 232,02   |    |
| Relative slenderness | $\lambda_{rel}$   | 3,04   | 3,04     |    |
| Limit slenderness    | $\lambda_{rel,0}$ | 0,20   | 0,20     |    |

| Buckling parameters |            | yy     | zz     |    |
|---------------------|------------|--------|--------|----|
| Buckling curve      |            | c      | c      |    |
| Imperfection        | $\alpha$   | 0,49   | 0,49   |    |
| Reduction factor    | $\chi$     | 0,09   | 0,09   |    |
| Buckling resistance | $N_{b,Rd}$ | 243,50 | 243,50 | kN |

| Flexural Buckling verification |            |            |                |
|--------------------------------|------------|------------|----------------|
| Cross-section area             | A          | 8,1130e-03 | m <sup>2</sup> |
| Buckling resistance            | $N_{b,Rd}$ | 243,50     | kN             |
| Unity check                    |            | 0,71       | -              |

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,979[\text{m}]^2} = 312,36[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,979[\text{m}]^2} = 312,36[\text{kN}]$$

$$\lambda_y = \frac{l_{cr,y}}{i_y} = \frac{16,979[\text{m}]}{73[\text{mm}]} = 232,02$$

$$\lambda_z = \frac{l_{cr,z}}{i_z} = \frac{16,979[\text{m}]}{73[\text{mm}]} = 232,02$$

$$\lambda_{rel,y} = \frac{\lambda_y}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{232,02}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 3,04$$

$$\lambda_{rel,z} = \frac{\lambda_z}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{232,02}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 3,04$$

$$\varphi_y = 0,5 \times [1 + \alpha_y \times (\lambda_{rel,y} - \lambda_{rel,y,0}) + \lambda_{rel,y}^2] = 0,5 \times [1 + 0,49 \times (3,04 - 0,20) + 3,04^2] = 5,81$$

$$\varphi_z = 0,5 \times [1 + \alpha_z \times (\lambda_{rel,z} - \lambda_{rel,z,0}) + \lambda_{rel,z}^2] = 0,5 \times [1 + 0,49 \times (3,04 - 0,20) + 3,04^2] = 5,81$$

$$\chi_y = \min\left(\frac{1}{\varphi_y + \sqrt{\varphi_y^2 - \lambda_{rel,y}^2}}, 1\right) = \min\left(\frac{1}{5,81 + \sqrt{5,81^2 - 3,04^2}}, 1\right) = \min(0,09, 1) = 0,09$$

$$\chi_z = \min\left(\frac{1}{\varphi_z + \sqrt{\varphi_z^2 - \lambda_{rel,z}^2}}, 1\right) = \min\left(\frac{1}{5,81 + \sqrt{5,81^2 - 3,04^2}}, 1\right) = \min(0,09, 1) = 0,09$$

$$N_{b,y,Rd} = \frac{\chi_y \times A \times f_y}{\gamma_{M1}} = \frac{0,09 \times 8,1130 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 243,50[\text{kN}]$$

$$N_{b,z,Rd} = \frac{\chi_z \times A \times f_y}{\gamma_{M1}} = \frac{0,09 \times 8,1130 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 243,50[\text{kN}]$$

$$N_{b,Rd} = \min(N_{b,y,Rd}, N_{b,z,Rd}) = \min(243,50[\text{kN}], 243,50[\text{kN}]) = 243,50[\text{kN}]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{b,Rd}} = \frac{|-172,13[\text{kN}]|}{243,50[\text{kN}]} = 0,71 \leq 1,00$$

#### Torsional(-Flexural) Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

**Note:** The cross-section concerns a CHS section which is not susceptible to Torsional(-Flexural) Buckling.

#### Lateral Torsional Buckling check



According to EN 1993-1-1 article 6.3.2.1

**Note:** The cross-section concerns a CHS section which is not susceptible to Lateral Torsional Buckling.

### Bending and axial compression check

According to EN 1993-1-1 article 6.3.3 and formula (6.61),(6.62)

| Bending and axial compression check parameters |                   |                      |                |
|--|-------------------|----------------------|----------------|
| Interaction method                             |                   | alternative method 1 |                |
| Cross-section area                             | A                 | 8,1130e-03           | m <sup>2</sup> |
| Plastic section modulus                        | W <sub>pl,y</sub> | 5,3420e-04           | m <sup>3</sup> |
| Plastic section modulus                        | W <sub>pl,z</sub> | 5,3420e-04           | m <sup>3</sup> |
| Design compression force                       | N <sub>Ed</sub>   | 172,13               | kN             |
| Design bending moment (maximum)                | M <sub>y,Ed</sub> | -51,76               | kNm            |
| Design bending moment (maximum)                | M <sub>z,Ed</sub> | -26,69               | kNm            |
| Characteristic compression resistance          | N <sub>Rk</sub>   | 2880,11              | kN             |
| Characteristic moment resistance               | M <sub>y,Rk</sub> | 189,64               | kNm            |
| Characteristic moment resistance               | M <sub>z,Rk</sub> | 189,64               | kNm            |
| Reduction factor                               | χ <sub>y</sub>    | 0,09                 |                |
| Reduction factor                               | χ <sub>z</sub>    | 0,09                 |                |
| Reduction factor                               | χ <sub>LT</sub>   | 1,00                 |                |
| Interaction factor                             | k <sub>yy</sub>   | 0,65                 |                |
| Interaction factor                             | k <sub>yz</sub>   | 0,58                 |                |
| Interaction factor                             | k <sub>zy</sub>   | 0,45                 |                |
| Interaction factor                             | k <sub>zz</sub>   | 0,80                 |                |

Maximum moment M<sub>y,Ed</sub> is derived from beam B5700 position 0,000 m.

Maximum moment M<sub>z,Ed</sub> is derived from beam B5700 position 0,000 m.

| Interaction method 1 parameters                       |                        |                            |                |
|---|------------------------|----------------------------|----------------|
| Critical Euler load                                   | N <sub>cr,y</sub>      | 312,36                     | kN             |
| Critical Euler load                                   | N <sub>cr,z</sub>      | 312,36                     | kN             |
| Elastic critical load                                 | N <sub>cr,T</sub>      | 655280,77                  | kN             |
| Plastic section modulus                               | W <sub>pl,y</sub>      | 5,3420e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,y</sub>      | 3,9658e-04                 | m <sup>3</sup> |
| Plastic section modulus                               | W <sub>pl,z</sub>      | 5,3420e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,z</sub>      | 3,9658e-04                 | m <sup>3</sup> |
| Second moment of area                                 | I <sub>y</sub>         | 4,3446e-05                 | m <sup>4</sup> |
| Second moment of area                                 | I <sub>z</sub>         | 4,3446e-05                 | m <sup>4</sup> |
| Torsional constant                                    | I <sub>t</sub>         | 8,6892e-05                 | m <sup>4</sup> |
| Method for equivalent moment factor C <sub>my,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>y,Ed</sub>      | -51,76                     | kNm            |
| Maximum relative deflection                           | δ <sub>z</sub>         | 9,8                        | mm             |
| Equivalent moment factor                              | C <sub>my,0</sub>      | 0,58                       |                |
| Method for equivalent moment factor C <sub>mz,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>z,Ed</sub>      | -26,69                     | kNm            |
| Maximum relative deflection                           | δ <sub>y</sub>         | 8,9                        | mm             |
| Equivalent moment factor                              | C <sub>mz,0</sub>      | 0,68                       |                |
| Factor  | μ <sub>y</sub>         | 0,47                       |                |
| Factor  | μ <sub>z</sub>         | 0,47                       |                |
| Factor  | ε <sub>y</sub>         | 6,15                       |                |
| Factor  | a <sub>LT</sub>        | 0,00                       |                |
| Critical moment for uniform bending                   | M <sub>cr,0</sub>      | 2961,22                    | kNm            |
| Relative slenderness                                  | λ <sub>rel,0</sub>     | 0,25                       |                |
| Limit relative slenderness                            | λ <sub>rel,0,lim</sub> | 0,27                       |                |
| Equivalent moment factor                              | C <sub>my</sub>        | 0,58                       |                |
| Equivalent moment factor                              | C <sub>mz</sub>        | 0,68                       |                |
| Equivalent moment factor                              | C <sub>mLT</sub>       | 1,00                       |                |
| Factor  | b <sub>LT</sub>        | 0,00                       |                |
| Factor  | c <sub>LT</sub>        | 0,00                       |                |
| Factor  | d <sub>LT</sub>        | 0,00                       |                |
| Factor  | e <sub>LT</sub>        | 0,00                       |                |

| Interaction method 1 parameters |                     |      |
|---------------------------------|---------------------|------|
| Factor                          | $W_y$               | 1,35 |
| Factor                          | $W_z$               | 1,35 |
| Factor                          | $n_{pl}$            | 0,07 |
| Maximum relative slenderness    | $\lambda_{rel,max}$ | 3,04 |
| Factor                          | $C_{yy}$            | 0,93 |
| Factor                          | $C_{yz}$            | 0,74 |
| Factor                          | $C_{zy}$            | 0,82 |
| Factor                          | $C_{zz}$            | 0,89 |

Unity check (6.61) = 0,71 + 0,20 + 0,09 = 0,99 -

Unity check (6.62) = 0,71 + 0,13 + 0,12 = 0,96 -

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{I_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,979[\text{m}]^2} = 312,36[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{I_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{16,979[\text{m}]^2} = 312,36[\text{kN}]$$

$$N_{cr,T} = \frac{1}{i_0^2} \times \left( G \times I_t + \frac{\pi^2 \times E \times I_w}{I_{cr}^2} \right) = \frac{1}{103[\text{mm}]^2} \times \left( 80769,2[\text{MPa}] \times 8,6892 \cdot 10^{-5}[\text{m}^4] + \frac{\pi^2 \times 210000,0[\text{MPa}] \times 8,8785 \cdot 10^{-40}[\text{m}^6]}{8,489[\text{m}]^2} \right) = 655280,77[\text{kN}]$$

$$C_{m,y,0} = 1 + \left( \frac{\pi^2 \times E \times I_y \times |\delta_z|}{L^2 \times |M_{y,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,y}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4] \times |9,8[\text{mm}]|}{8,489[\text{m}]^2 \times |-51,76[\text{kNm}]|} - 1 \right) \times \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]} = 0,58$$

$$C_{m,z,0} = 1 + \left( \frac{\pi^2 \times E \times I_z \times |\delta_y|}{L^2 \times |M_{z,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,z}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4] \times |8,9[\text{mm}]|}{8,489[\text{m}]^2 \times |-26,69[\text{kNm}]|} - 1 \right) \times \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]} = 0,68$$

$$\mu_y = \frac{1 - \frac{|N_{Ed}|}{N_{cr,y}}}{1 - \frac{\chi_y \times |N_{Ed}|}{N_{cr,y}}} = \frac{1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]}}{1 - \frac{0,09 \times |172,13[\text{kN}]|}{312,36[\text{kN}]}} = 0,47$$

$$\mu_z = \frac{1 - \frac{|N_{Ed}|}{N_{cr,z}}}{1 - \frac{\chi_z \times |N_{Ed}|}{N_{cr,z}}} = \frac{1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]}}{1 - \frac{0,09 \times |172,13[\text{kN}]|}{312,36[\text{kN}]}} = 0,47$$

$$\epsilon_y = \left| \frac{M_{y,Ed}}{N_{Ed}} \right| \times \frac{A}{W_{el,y}} = \left| \frac{-51,76[\text{kNm}]}{172,13[\text{kN}]} \right| \times \frac{8,1130 \cdot 10^{-3}[\text{m}^2]}{3,9658 \cdot 10^{-4}[\text{m}^3]} = 6,15$$

$$a_{LT} = \max \left( 1 - \frac{I_t}{I_y}, 0 \right) = \max \left( 1 - \frac{8,6892 \cdot 10^{-5}[\text{m}^4]}{4,3446 \cdot 10^{-5}[\text{m}^4]}, 0 \right) = \max(-1,00, 0,00) = 0,00$$

$$M_{cr,0} = \frac{C_1 \times \pi^2 \times E \times I_z}{(k \times l_{LT})^2} \times \left[ \sqrt{\frac{\left( \frac{k}{k_w} \right)^2 \times I_w}{I_z} + \frac{(k \times l_{LT})^2 \times G \times I_t}{\pi^2 \times E \times I_z} + (C_2 \times z_g - C_3 \times z_j)^2} - (C_2 \times z_g - C_3 \times z_j) \right] \\ = \frac{1,00 \times \pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]}{(1,00 \times 8,489[\text{m}])^2} \\ \times \left[ \sqrt{\frac{\left( \frac{1,00}{1,00} \right)^2 \times 8,8785 \cdot 10^{-40}[\text{m}^6]}{4,3446 \cdot 10^{-5}[\text{m}^4]} + \frac{(1,00 \times 8,489[\text{m}])^2 \times 80769,2[\text{MPa}] \times 8,6892 \cdot 10^{-5}[\text{m}^4]}{\pi^2 \times 210000,0[\text{MPa}] \times 4,3446 \cdot 10^{-5}[\text{m}^4]} + (0,11 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])^2} - (0,11 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])} \right] \\ = 2961,22[\text{kNm}]$$

$$\lambda_{rel,0} = \sqrt{\frac{W_{pl,y} \times f_y}{M_{cr,0}}} = \sqrt{\frac{5,3420 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{2961,22[\text{kNm}]} = 0,25$$

$$\lambda_{rel,0,lim} = 0,2 \times \sqrt{C_1} \times \sqrt{\left( 1 - \frac{|N_{Ed}|}{N_{cr,z}} \right) \times \left( 1 - \frac{|N_{Ed}|}{N_{cr,T}} \right)} = 0,2 \times \sqrt{2,77} \times \sqrt{\left( 1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]} \right) \times \left( 1 - \frac{|172,13[\text{kN}]|}{655280,77[\text{kN}]} \right)} = 0,27$$

$$C_{my} = C_{my,0} = 0,58$$

$$C_{mz} = C_{mz,0} = 0,68$$

$$C_{mLT} = 1,00$$

$$b_{LT} = 0,5 \times a_{LT} \times \lambda_{rel,0}^2 \times \frac{|M_{y,Ed}|}{\chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = 0,5 \times 0,00 \times 0,25^2 \times \frac{|-51,76[\text{kNm}]|}{1,00 \times 189,64[\text{kNm}]} \times \frac{|-26,69[\text{kNm}]|}{189,64[\text{kNm}]} = 0,00$$

$$c_{LT} = 10 \times a_{LT} \times \frac{\lambda_{rel,0}^2}{5 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 10 \times 0,00 \times \frac{0,25^2}{5 + 3,04^4} \times \frac{|-51,76[\text{kNm}]|}{0,58 \times 1,00 \times 189,64[\text{kNm}]} = 0,00$$

$$d_{LT} = 2 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{C_{mz} \times M_{pl,z,Rd}}$$

$$= 2 \times 0,00 \times \frac{0,25}{0,1 + 3,04^4} \times \frac{|-51,76[\text{kNm}]|}{0,58 \times 1,00 \times 189,64[\text{kNm}]} \times \frac{|-26,69[\text{kNm}]|}{0,68 \times 189,64[\text{kNm}]} = 0,00$$

$$e_{LT} = 1,7 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 1,7 \times 0,00 \times \frac{0,25}{0,1 + 3,04^4} \times \frac{|-51,76[\text{kNm}]|}{0,58 \times 1,00 \times 189,64[\text{kNm}]} = 0,00$$

$$w_y = \min \left( \frac{W_{pl,y}}{W_{el,y}}, 1,5 \right) = \min \left( \frac{5,3420 \cdot 10^{-4}[\text{m}^3]}{3,9658 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,35, 1,50) = 1,35$$

$$w_z = \min \left( \frac{W_{pl,z}}{W_{el,z}}, 1,5 \right) = \min \left( \frac{5,3420 \cdot 10^{-4}[\text{m}^3]}{3,9658 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,35, 1,50) = 1,35$$

$$n_{pl} = \frac{|N_{Ed}|}{\frac{N_{Rk}}{\gamma_{M1}}} = \frac{172,13[\text{kN}]}{\frac{2880,11[\text{kN}]}{1,10}} = 0,07$$

$$\lambda_{rel,max} = \max(\lambda_{rel,y}, \lambda_{rel,z}) = \max(3,04, 3,04) = 3,04$$

$$C_{yy} = \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max} - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max}^2 \right) \times n_{pl} - b_{LT} \right], \frac{W_{el,y}}{W_{pl,y}} \right\}$$

$$= \max \left\{ 1 + (1,35 - 1) \times \left[ \left( 2 - \frac{1,6}{1,35} \times 0,58^2 \times 3,04 - \frac{1,6}{1,35} \times 0,58^2 \times 3,04^2 \right) \times 0,07 - 0,00 \right], \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,93, 0,74\}$$

$$= 0,93$$

$$C_{yz} = \max \left\{ 1 + (w_z - 1) \times \left[ \left( 2 - 14 \times \frac{C_{mz}^2 \times \lambda_{rel,max}^2}{w_z^5} \right) \times n_{pl} - c_{LT} \right], 0,6 \times \sqrt{\frac{w_z}{w_y}} \times \frac{W_{el,z}}{W_{pl,z}} \right\}$$

$$= \max \left\{ 1 + (1,35 - 1) \times \left[ \left( 2 - 14 \times \frac{0,68^2 \times 3,04^2}{1,35^5} \right) \times 0,07 - 0,00 \right], 0,6 \times \sqrt{\frac{1,35}{1,35}} \times \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,74, 0,45\} = 0,74$$

$$C_{zy} = \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - 14 \times \frac{C_{my}^2 \times \lambda_{rel,max}^2}{w_y^5} \right) \times n_{pl} - d_{LT} \right], 0,6 \times \sqrt{\frac{w_y}{w_z}} \times \frac{W_{el,y}}{W_{pl,y}} \right\}$$

$$= \max \left\{ 1 + (1,35 - 1) \times \left[ \left( 2 - 14 \times \frac{0,58^2 \times 3,04^2}{1,35^5} \right) \times 0,07 - 0,00 \right], 0,6 \times \sqrt{\frac{1,35}{1,35}} \times \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,82, 0,45\} = 0,82$$

$$C_{zz} = \max \left[ 1 + (w_z - 1) \times \left( 2 - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max} - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max}^2 - e_{LT} \right) \times n_{pl}, \frac{W_{el,z}}{W_{pl,z}} \right]$$

$$= \max \left[ 1 + (1,35 - 1) \times \left( 2 - \frac{1,6}{1,35} \times 0,68^2 \times 3,04 - \frac{1,6}{1,35} \times 0,68^2 \times 3,04^2 - 0,00 \right) \times 0,07, \frac{3,9658 \cdot 10^{-4}[\text{m}^3]}{5,3420 \cdot 10^{-4}[\text{m}^3]} \right] = \max[0,89, 0,74] = 0,89$$

$$N_{Rk} = A \times f_y = 8,1130 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}] = 2880,11[\text{kN}]$$

$$M_{y,Rk} = W_{pl,y} \times f_y = 5,3420 \cdot 10^{-4} [\text{m}^3] \times 355,0 [\text{MPa}] = 189,64 [\text{kNm}]$$

$$M_{z,Rk} = W_{pl,z} \times f_y = 5,3420 \cdot 10^{-4} [\text{m}^3] \times 355,0 [\text{MPa}] = 189,64 [\text{kNm}]$$

$$k_{yy} = C_{my} \times C_{mLT} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{yy}} = 0,58 \times 1,00 \times \frac{0,47}{1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]}} \times \frac{1}{0,93} = 0,65$$

$$k_{yz} = C_{mz} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{yz}} \times 0,6 \times \sqrt{\frac{w_z}{w_y}} = 0,68 \times \frac{0,47}{1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]}} \times \frac{1}{0,74} \times 0,6 \times \sqrt{\frac{1,35}{1,35}} = 0,58$$

$$k_{zy} = C_{my} \times C_{mLT} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{zy}} \times 0,6 \times \sqrt{\frac{w_y}{w_z}} = 0,58 \times 1,00 \times \frac{0,47}{1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]}} \times \frac{1}{0,82} \times 0,6 \times \sqrt{\frac{1,35}{1,35}} = 0,45$$

$$k_{zz} = C_{mz} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{zz}} = 0,68 \times \frac{0,47}{1 - \frac{|172,13[\text{kN}]|}{312,36[\text{kN}]}} \times \frac{1}{0,89} = 0,80$$

$$\begin{aligned} \text{Unity check (6.61)} &= \frac{|N_{Ed}|}{\chi_y \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{yy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{yz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\ &= \frac{|172,13[\text{kN}]|}{0,09 \times \frac{2880,11[\text{kN}]}{1,10}} + 0,65 \times \frac{|-51,76[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{189,64[\text{kNm}]}{1,10}} + 0,58 \times \frac{|-26,69[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{189,64[\text{kNm}]}{1,10}} = \mathbf{0,99 \leq 1,00} \end{aligned}$$


$$\begin{aligned} \text{Unity check (6.62)} &= \frac{|N_{Ed}|}{\chi_z \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{zy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{zz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\ &= \frac{|172,13[\text{kN}]|}{0,09 \times \frac{2880,11[\text{kN}]}{1,10}} + 0,45 \times \frac{|-51,76[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{189,64[\text{kNm}]}{1,10}} + 0,80 \times \frac{|-26,69[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{189,64[\text{kNm}]}{1,10}} = \mathbf{0,96 \leq 1,00} \end{aligned}$$

$$\text{Unity check} = \max(\text{Unity check (6.61)}, \text{Unity check (6.62)}) = \max(0,99, 0,96) = \mathbf{0,99 \leq 1,00}$$


The member satisfies the stability check.

#### 4.4. Stupovi niskog dijela nadstrešnice „S2“


##### 4.4.1. Rezne sile niskog dijela nadstrešnice „S2“

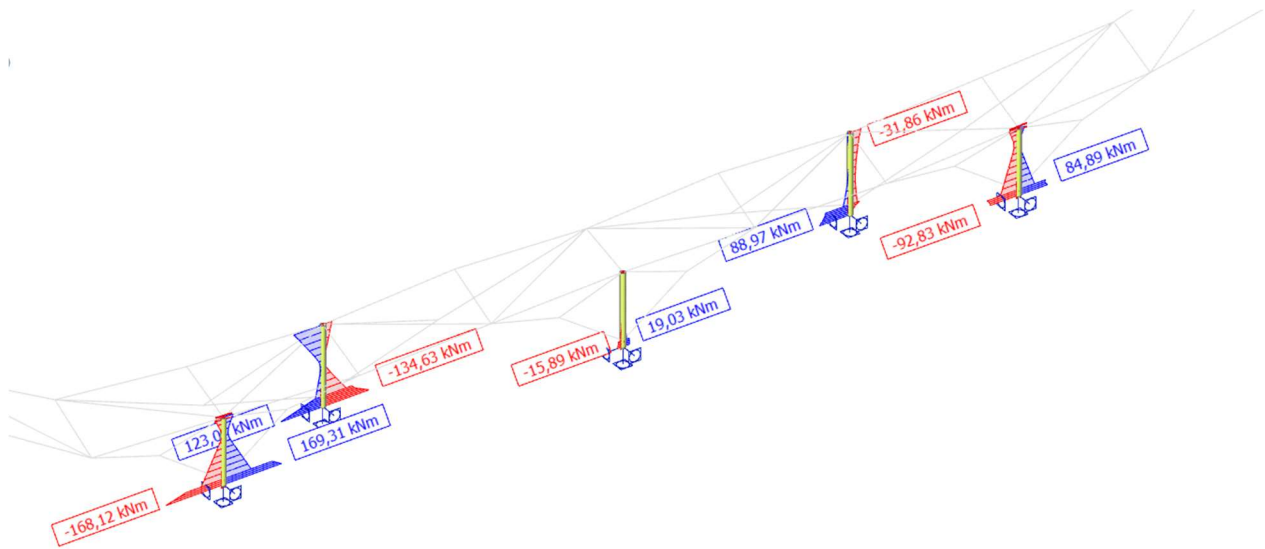


Slika 83: Moment savijanja  $M_y$  (kNm)- stupovi niskog dijela nadstrešnice „S2“ od osi N7 do N13

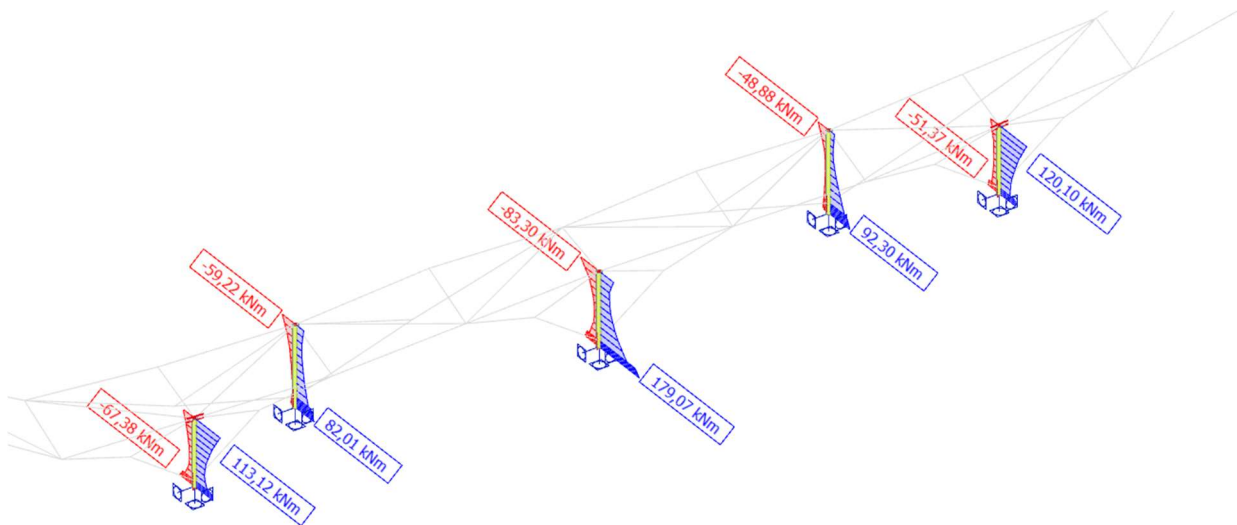


Slika 84: Moment savijanja  $M_z$  (kNm)- stupovi niskog dijela nadstrešnice „S2“ od osi N7 do N13

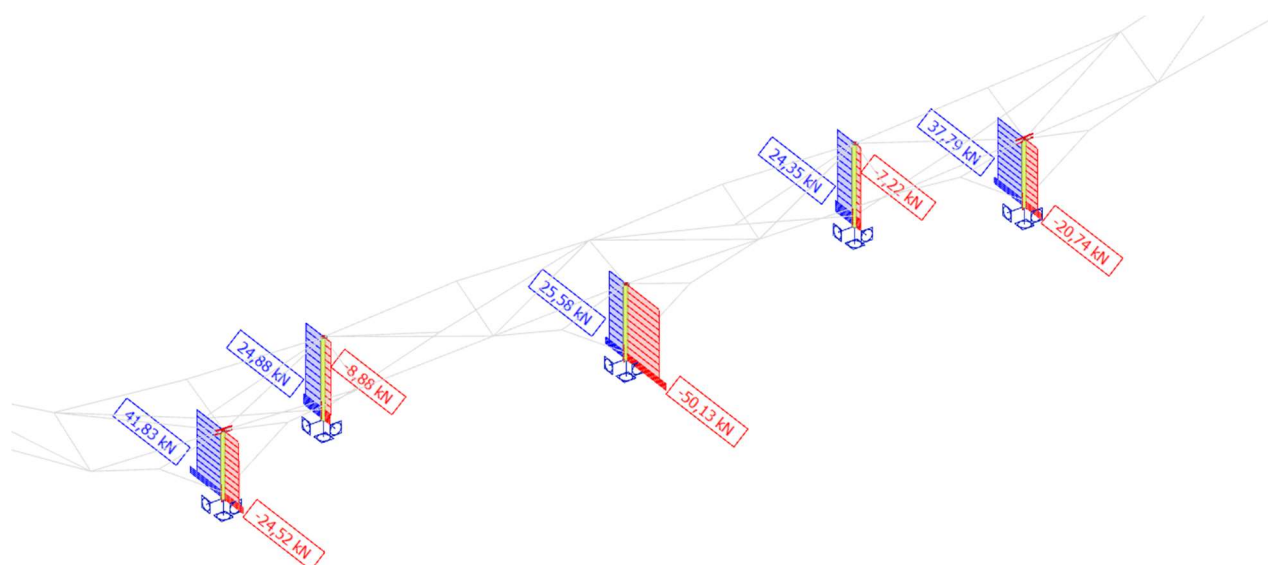

Slika 85: Poprečna sila  $V_y$  (kN)- stupovi niskog dijela nadstrešnice „S2“ od osi N7 do N13

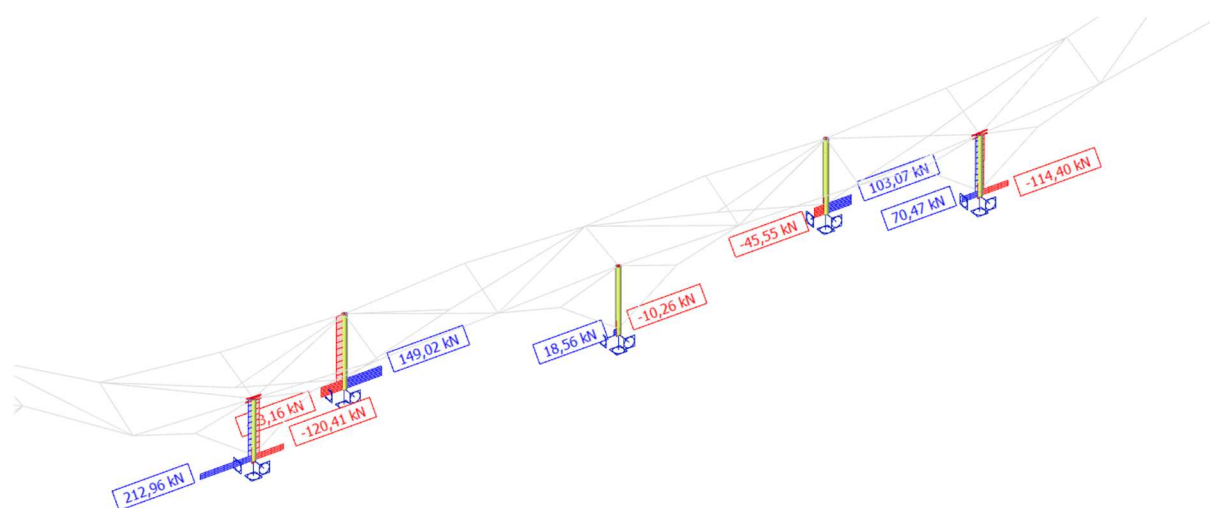


Slika 86: Poprečna sila  $V_z$  (kN)- stupovi niskog dijela nadstrešnice „S2“ od osi N7 do N13

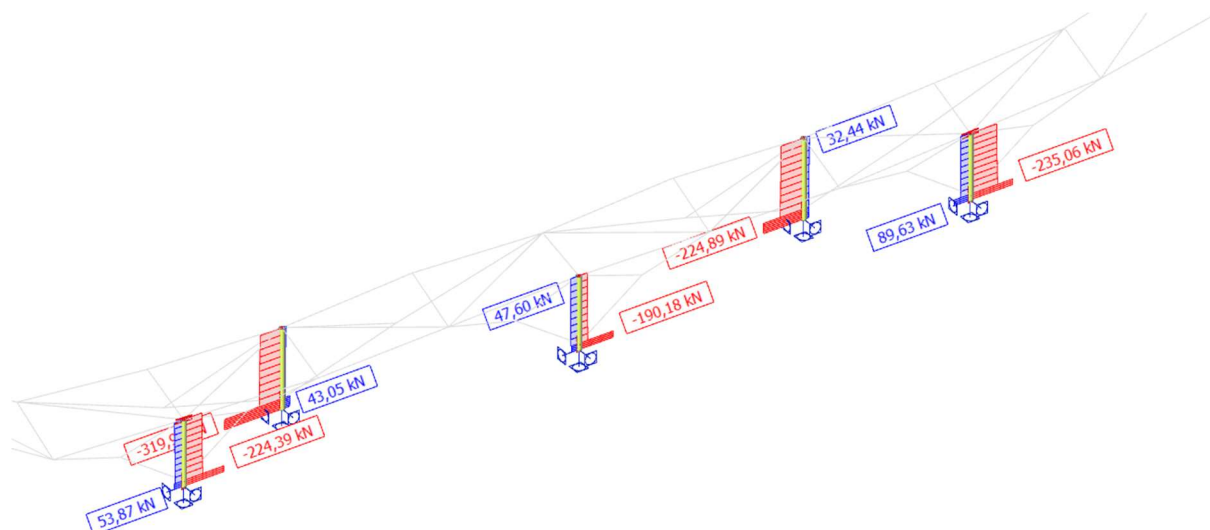

Slika 87: Uzdužna sila  $N$  (kN)- stupovi niskog dijela nadstrešnice „S2“ od osi N7 do N13

#### 4.4.2. Dimenzioniranje rubnog stupa nadstrešnice „S1“

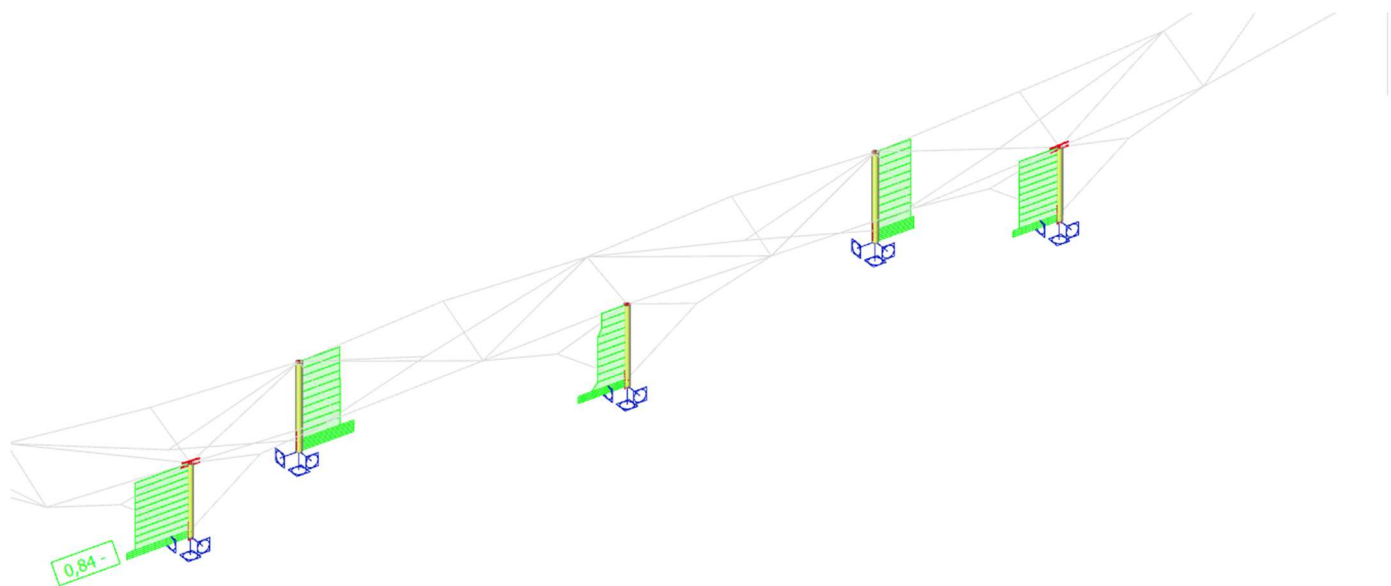

Slika 88: Prikaz iskoristivosti stupova niskog dijela nadstrešnice „S2“ od osi N7 do osi N13



## EC-EN 1993 Steel check ULS

Linear calculation  
 Combination: ULS-Set B (auto)  
 Coordinate system: Principal  
 Extreme 1D: Global  
 Selection: All

### EN 1993-1-1 Code Check

National annex: Standard EN

|                     |                        |                     |                    |              |                         |               |
|---------------------|------------------------|---------------------|--------------------|--------------|-------------------------|---------------|
| <b>Member B6203</b> | <b>0,000 / 4,508 m</b> | <b>CFCHS355.6X8</b> | <b>Cold formed</b> | <b>S 355</b> | <b>ULS-Set B (auto)</b> | <b>0,84 -</b> |
|---------------------|------------------------|---------------------|--------------------|--------------|-------------------------|---------------|

Note: EN 1993-1-3 article 1.1(3) specifies that this part does not apply to cold formed CHS and RHS sections. The default EN 1993-1-1 code check is executed instead of the EN 1993-1-3 code check.

| Combination key  |  |
|--|--|
| ULS-Set B (auto) / 1.35*G + 1.35*dg + 0.75*s + 1.50*T+ + 0.90*w3(pritisak) |  |

| Partial safety factors       |               |      |  |
|------------------------------|---------------|------|--|
| Resistance of cross-sections | $\gamma_{M0}$ | 1,00 |  |
| Resistance to instability    | $\gamma_{M1}$ | 1,10 |  |
| Resistance of net sections   | $\gamma_{M2}$ | 1,25 |  |

| Material          |       |       |     |
|-------------------|-------|-------|-----|
| Yield strength    | $f_y$ | 355,0 | MPa |
| Ultimate strength | $f_u$ | 490,0 | MPa |

....:SECTION CHECK:....

The critical check is on position **0,000 m**

| Internal forces |            | Calculated | Unit |
|-----------------|------------|------------|------|
| Normal force    | $N_{Ed}$   | -190,27    | kN   |
| Shear force     | $V_{y,Ed}$ | 28,08      | kN   |
| Shear force     | $V_{z,Ed}$ | -61,39     | kN   |
| Torsion         | $T_{Ed}$   | 13,23      | kNm  |
| Bending moment  | $M_{y,Ed}$ | 162,63     | kNm  |
| Bending moment  | $M_{z,Ed}$ | 1,50       | kNm  |

### Classification for cross-section design

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d [mm] | t [mm] | d/t [-] | Class 1 Limit [-] | Class 2 Limit [-] | Class 3 Limit [-] | Class |
|--------|--------|---------|-------------------|-------------------|-------------------|-------|
| 356    | 8      | 44,5    | 33,1              | 46,3              | 59,6              | 2     |

The cross-section is classified as Class 2

### Compression check

According to EN 1993-1-1 article 6.2.4 and formula (6.9)

|                        |            |            |                |
|------------------------|------------|------------|----------------|
| Cross-section area     | A          | 8,7360e-03 | m <sup>2</sup> |
| Compression resistance | $N_{c,Rd}$ | 3101,28    | kN             |
| Unity check            |            | 0,06       | -              |

$$N_{c,Rd} = \frac{A \times f_y}{\gamma_{M0}} = \frac{8,7360 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,00} = 3101,28 [kN]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{c,Rd}} = \frac{|-190,27 [kN]|}{3101,28 [kN]} = 0,06 \leq 1,00$$

**Bending moment check for  $M_y$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,y}$    | 9,6680e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,y,Rd}$ | 343,21     | kNm            |
| Unity check             |               | 0,47       | -              |

$$M_{pl,y,Rd} = \frac{W_{pl,y} \times f_y}{\gamma_{M0}} = \frac{9,6680 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 343,21 [kNm]$$

$$\text{Unity check} = \frac{|M_{y,Ed}|}{M_{pl,y,Rd}} = \frac{|162,63 [kNm]|}{343,21 [kNm]} = 0,47 \leq 1,00$$

**Bending moment check for  $M_z$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,z}$    | 9,6680e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,z,Rd}$ | 343,21     | kNm            |
| Unity check             |               | 0,00       | -              |

$$M_{pl,z,Rd} = \frac{W_{pl,z} \times f_y}{\gamma_{M0}} = \frac{9,6680 \cdot 10^{-4} [m^3] \times 355,0 [MPa]}{1,00} = 343,21 [kNm]$$

$$\text{Unity check} = \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = \frac{|1,50 [kNm]|}{343,21 [kNm]} = 0,00 \leq 1,00$$

**Shear check for  $V_y$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,5615e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_y$ | $V_{pl,y,Rd}$ | 1139,88    | kN             |
| Unity check                        |               | 0,02       | -              |

$$V_{pl,y,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,5615 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 1139,88 [kN]$$

$$\text{Unity check} = \frac{|V_{y,Ed}|}{V_{c,y,Rd}} = \frac{|28,08 [kN]|}{1139,88 [kN]} = 0,02 \leq 1,00$$

**Shear check for  $V_z$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,5615e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_z$ | $V_{pl,z,Rd}$ | 1139,88    | kN             |
| Unity check                        |               | 0,05       | -              |

$$V_{pl,z,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,5615 \cdot 10^{-3} [m^2] \times \frac{355,0 [MPa]}{\sqrt{3}}}{1,00} = 1139,88 [kN]$$

$$\text{Unity check} = \frac{|V_{z,Ed}|}{V_{c,z,Rd}} = \frac{|-61,39 [kN]|}{1139,88 [kN]} = 0,05 \leq 1,00$$

**Torsion check**

According to EN 1993-1-1 article 6.2.7 and formula (6.23)

|                          |          |       |     |
|--------------------------|----------|-------|-----|
| Index of fibre           | Fibre    | 1     |     |
| Total torsional moment   | $T_{Ed}$ | 8,7   | MPa |
| Elastic shear resistance | $T_{Rd}$ | 205,0 | MPa |
| Unity check              |          | 0,04  | -   |

$$\tau_{Ed} = \left| \frac{T_{Ed}}{T_{Ed,unit}} \times \tau_{Ed,unit} \right| = \left| \frac{13,23[\text{kNm}]}{1,00[\text{kNm}]} \times 658,613[\text{kN/m}^2] \right| = 8,7[\text{MPa}]$$

$$\tau_{Rd} = \frac{f_y}{\sqrt{3} \times \gamma_{M0}} = \frac{355,0[\text{MPa}]}{\sqrt{3} \times 1,00} = 205,0[\text{MPa}]$$

$$\text{Unity check} = \frac{\tau_{Ed}}{\tau_{Rd}} = \frac{8,7[\text{MPa}]}{205,0[\text{MPa}]} = \mathbf{0,04} \leq \mathbf{1,00}$$

**Note:** The unity check for torsion is lower than the limit value of 0,05. Therefore torsion is considered as insignificant and is ignored in the combined checks.

### Combined bending, axial force and shear force check

According to EN 1993-1-1 article 6.2.9.1 and formula (6.31)

|  |                        |        |     |
|--|------------------------|--------|-----|
| Resultant bending moment                                 | $M_{\text{resultant}}$ | 162,64 | kNm |
| Resultant shear force                                    | $V_{\text{resultant}}$ | 67,51  | kN  |
| Design plastic moment resistance reduced due to $N_{Ed}$ | $M_{N,Rd}$             | 340,23 | kNm |
| Unity check  |                        | 0,48   | -   |

$$n = \frac{|N_{Ed}|}{N_{pl,Rd}} = \frac{|-190,27[\text{kN}]|}{3101,28[\text{kN}]} = 0,06$$

$$M_{N,Rd} = M_{pl,Rd} \times (1 - n^{1,7}) = 343,21[\text{kNm}] \times (1 - 0,06^{1,7}) = 340,23[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{\text{resultant}}|}{M_{N,Rd}} = \frac{162,64[\text{kNm}]}{340,23[\text{kNm}]} = \mathbf{0,48} \leq \mathbf{1,00}$$

**Note:** The resultant internal forces are used for CHS sections.

**Note:** Since the shear forces are less than half the plastic shear resistances their effect on the moment resistances is neglected.

The member satisfies the section check.

### ....:STABILITY CHECK:....

#### Classification for member buckling design

Decisive position for stability classification: 0,000 m

Decisive utilisation factor  $\eta$ : 0,49

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d<br>[mm] | t<br>[mm] | d/t<br>[-] | Class 1 Limit<br>[-] | Class 2 Limit<br>[-] | Class 3 Limit<br>[-] | Class |
|-----------|-----------|------------|----------------------|----------------------|----------------------|-------|
| 356       | 8         | 44,5       | 33,1                 | 46,3                 | 59,6                 | 2     |

The cross-section is classified as Class 2

**Note:** The decisive position for the stability classification is based on the utilisation factor  $\eta$  according to Semi-Comp+.

#### Flexural Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

| Buckling parameters  |                   | yy      | zz       |    |
|----------------------|-------------------|---------|----------|----|
| Sway type            |                   | sway    | non-sway |    |
| System length        | L                 | 4,508   | 4,508    | m  |
| Buckling factor      | k                 | 1,72    | 0,66     |    |
| Buckling length      | $l_{cr}$          | 7,747   | 2,994    | m  |
| Critical Euler load  | $N_{cr}$          | 4559,12 | 30519,41 | kN |
| Slenderness          | $\lambda$         | 63,02   | 24,36    |    |
| Relative slenderness | $\lambda_{rel}$   | 0,82    | 0,32     |    |
| Limit slenderness    | $\lambda_{rel,0}$ | 0,20    | 0,20     |    |

| Buckling parameters |            | yy      | zz      |    |
|---------------------|------------|---------|---------|----|
| Buckling curve      |            | c       | c       |    |
| Imperfection        | $\alpha$   | 0,49    | 0,49    |    |
| Reduction factor    | $\chi$     | 0,65    | 0,94    |    |
| Buckling resistance | $N_{b,Rd}$ | 1823,02 | 2648,91 | kN |

| Flexural Buckling verification |            |            |                |
|--------------------------------|------------|------------|----------------|
| Cross-section area             | A          | 8,7360e-03 | m <sup>2</sup> |
| Buckling resistance            | $N_{b,Rd}$ | 1823,02    | kN             |
| Unity check                    |            | 0,10       | -              |

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{7,747[\text{m}]^2} = 4559,12[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{2,994[\text{m}]^2} = 30519,41[\text{kN}]$$

$$\lambda_y = \frac{l_{cr,y}}{i_y} = \frac{7,747[\text{m}]}{123[\text{mm}]} = 63,02$$

$$\lambda_z = \frac{l_{cr,z}}{i_z} = \frac{2,994[\text{m}]}{123[\text{mm}]} = 24,36$$

$$\lambda_{rel,y} = \frac{\lambda_y}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{63,02}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 0,82$$

$$\lambda_{rel,z} = \frac{\lambda_z}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{24,36}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 0,32$$

$$\varphi_y = 0,5 \times [1 + \alpha_y \times (\lambda_{rel,y} - \lambda_{rel,y,0}) + \lambda_{rel,y}^2] = 0,5 \times [1 + 0,49 \times (0,82 - 0,20) + 0,82^2] = 0,99$$

$$\varphi_z = 0,5 \times [1 + \alpha_z \times (\lambda_{rel,z} - \lambda_{rel,z,0}) + \lambda_{rel,z}^2] = 0,5 \times [1 + 0,49 \times (0,32 - 0,20) + 0,32^2] = 0,58$$

$$\chi_y = \min\left(\frac{1}{\varphi_y + \sqrt{\varphi_y^2 - \lambda_{rel,y}^2}}, 1\right) = \min\left(\frac{1}{0,99 + \sqrt{0,99^2 - 0,82^2}}, 1\right) = \min(0,65, 1) = 0,65$$

$$\chi_z = \min\left(\frac{1}{\varphi_z + \sqrt{\varphi_z^2 - \lambda_{rel,z}^2}}, 1\right) = \min\left(\frac{1}{0,58 + \sqrt{0,58^2 - 0,32^2}}, 1\right) = \min(0,94, 1) = 0,94$$

$$N_{b,y,Rd} = \frac{\chi_y \times A \times f_y}{\gamma_{M1}} = \frac{0,65 \times 8,7360 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 1823,02[\text{kN}]$$

$$N_{b,z,Rd} = \frac{\chi_z \times A \times f_y}{\gamma_{M1}} = \frac{0,94 \times 8,7360 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 2648,91[\text{kN}]$$

$$N_{b,Rd} = \min(N_{b,y,Rd}, N_{b,z,Rd}) = \min(1823,02[\text{kN}], 2648,91[\text{kN}]) = 1823,02[\text{kN}]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{b,Rd}} = \frac{|-190,27[\text{kN}]|}{1823,02[\text{kN}]} = 0,10 \leq 1,00$$

#### Torsional(-Flexural) Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

**Note:** The cross-section concerns a CHS section which is not susceptible to Torsional(-Flexural) Buckling.

#### Lateral Torsional Buckling check

According to EN 1993-1-1 article 6.3.2.1

**Note:** The cross-section concerns a CHS section which is not susceptible to Lateral Torsional Buckling.

### Bending and axial compression check

According to EN 1993-1-1 article 6.3.3 and formula (6.61),(6.62)

| Bending and axial compression check parameters |                   |                      |                |
|--|-------------------|----------------------|----------------|
| Interaction method                             |                   | alternative method 1 |                |
| Cross-section area                             | A                 | 8,7360e-03           | m <sup>2</sup> |
| Plastic section modulus                        | W <sub>pl,y</sub> | 9,6680e-04           | m <sup>3</sup> |
| Plastic section modulus                        | W <sub>pl,z</sub> | 9,6680e-04           | m <sup>3</sup> |
| Design compression force                       | N <sub>Ed</sub>   | 190,27               | kN             |
| Design bending moment (maximum)                | M <sub>y,Ed</sub> | 162,63               | kNm            |
| Design bending moment (maximum)                | M <sub>z,Ed</sub> | 95,35                | kNm            |
| Characteristic compression resistance          | N <sub>Rk</sub>   | 3101,28              | kN             |
| Characteristic moment resistance               | M <sub>y,Rk</sub> | 343,21               | kNm            |
| Characteristic moment resistance               | M <sub>z,Rk</sub> | 343,21               | kNm            |
| Reduction factor                               | χ <sub>y</sub>    | 0,65                 |                |
| Reduction factor                               | χ <sub>z</sub>    | 0,94                 |                |
| Reduction factor                               | χ <sub>LT</sub>   | 1,00                 |                |
| Interaction factor                             | k <sub>yy</sub>   | 1,07                 |                |
| Interaction factor                             | k <sub>yz</sub>   | 0,60                 |                |
| Interaction factor                             | k <sub>zy</sub>   | 0,66                 |                |
| Interaction factor                             | k <sub>zz</sub>   | 1,01                 |                |

Maximum moment M<sub>y,Ed</sub> is derived from beam B6203 position 0,000 m.

Maximum moment M<sub>z,Ed</sub> is derived from beam B6203 position 4,508 m.

| Interaction method 1 parameters                       |                        |                            |                |
|---|------------------------|----------------------------|----------------|
| Critical Euler load                                   | N <sub>cr,y</sub>      | 4559,12                    | kN             |
| Critical Euler load                                   | N <sub>cr,z</sub>      | 30519,41                   | kN             |
| Elastic critical load                                 | N <sub>cr,T</sub>      | 705626,73                  | kN             |
| Plastic section modulus                               | W <sub>pl,y</sub>      | 9,6680e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,y</sub>      | 7,4250e-04                 | m <sup>3</sup> |
| Plastic section modulus                               | W <sub>pl,z</sub>      | 9,6680e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,z</sub>      | 7,4250e-04                 | m <sup>3</sup> |
| Second moment of area                                 | I <sub>y</sub>         | 1,3201e-04                 | m <sup>4</sup> |
| Second moment of area                                 | I <sub>z</sub>         | 1,3201e-04                 | m <sup>4</sup> |
| Torsional constant                                    | I <sub>t</sub>         | 2,6403e-04                 | m <sup>4</sup> |
| Method for equivalent moment factor C <sub>my,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>y,Ed</sub>      | 162,63                     | kNm            |
| Maximum relative deflection                           | δ <sub>z</sub>         | 23,2                       | mm             |
| Equivalent moment factor                              | C <sub>my,0</sub>      | 1,04                       |                |
| Method for equivalent moment factor C <sub>mz,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>z,Ed</sub>      | 95,35                      | kNm            |
| Maximum relative deflection                           | δ <sub>y</sub>         | 10,2                       | mm             |
| Equivalent moment factor                              | C <sub>mz,0</sub>      | 1,00                       |                |
| Factor  | μ <sub>y</sub>         | 0,98                       |                |
| Factor  | μ <sub>z</sub>         | 1,00                       |                |
| Factor  | ε <sub>y</sub>         | 10,06                      |                |
| Factor  | a <sub>LT</sub>        | 0,00                       |                |
| Critical moment for uniform bending                   | M <sub>cr,0</sub>      | 16944,23                   | kNm            |
| Relative slenderness                                  | λ <sub>rel,0</sub>     | 0,14                       |                |
| Limit relative slenderness                            | λ <sub>rel,0,lim</sub> | 0,33                       |                |
| Equivalent moment factor                              | C <sub>my</sub>        | 1,04                       |                |
| Equivalent moment factor                              | C <sub>mz</sub>        | 1,00                       |                |
| Equivalent moment factor                              | C <sub>mLT</sub>       | 1,00                       |                |
| Factor  | b <sub>LT</sub>        | 0,00                       |                |
| Factor  | c <sub>LT</sub>        | 0,00                       |                |
| Factor  | d <sub>LT</sub>        | 0,00                       |                |
| Factor  | e <sub>LT</sub>        | 0,00                       |                |

| Interaction method 1 parameters |                     |      |
|---------------------------------|---------------------|------|
| Factor                          | $W_y$               | 1,30 |
| Factor                          | $W_z$               | 1,30 |
| Factor                          | $n_{pl}$            | 0,07 |
| Maximum relative slenderness    | $\lambda_{rel,max}$ | 0,82 |
| Factor                          | $C_{yy}$            | 1,00 |
| Factor                          | $C_{yz}$            | 0,99 |
| Factor                          | $C_{zy}$            | 0,98 |
| Factor                          | $C_{zz}$            | 1,00 |

Unity check (6.61) = 0,10 + 0,56 + 0,18 = 0,84 -

Unity check (6.62) = 0,07 + 0,34 + 0,31 = 0,72 -

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{I_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{7,747[\text{m}]^2} = 4559,12[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{I_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{2,994[\text{m}]^2} = 30519,41[\text{kN}]$$

$$N_{cr,T} = \frac{1}{i_0^2} \times \left( G \times I_t + \frac{\pi^2 \times E \times I_w}{I_{cr}^2} \right) = \frac{1}{174[\text{mm}]^2} \times \left( 80769,2[\text{MPa}] \times 2,6403 \cdot 10^{-4}[\text{m}^4] + \frac{\pi^2 \times 210000,0[\text{MPa}] \times 7,8644 \cdot 10^{-39}[\text{m}^6]}{4,508[\text{m}]^2} \right) = 705626,73[\text{kN}]$$

$$C_{my,0} = 1 + \left( \frac{\pi^2 \times E \times I_y \times |\delta_z|}{L^2 \times |M_{y,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,y}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4] \times |23,2[\text{mm}]|}{4,508[\text{m}]^2 \times |162,63[\text{kNm}]|} - 1 \right) \times \frac{|190,27[\text{kN}]|}{4559,12[\text{kN}]} = 1,04$$

$$C_{mz,0} = 1 + \left( \frac{\pi^2 \times E \times I_z \times |\delta_y|}{L^2 \times |M_{z,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,z}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4] \times |10,2[\text{mm}]|}{4,508[\text{m}]^2 \times |95,35[\text{kNm}]|} - 1 \right) \times \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]} = 1,00$$

$$\mu_y = \frac{1 - \frac{|N_{Ed}|}{N_{cr,y}}}{1 - \frac{\chi_y \times |N_{Ed}|}{N_{cr,y}}} = \frac{1 - \frac{|190,27[\text{kN}]|}{4559,12[\text{kN}]}}{1 - \frac{0,65 \times |190,27[\text{kN}]|}{4559,12[\text{kN}]}} = 0,98$$

$$\mu_z = \frac{1 - \frac{|N_{Ed}|}{N_{cr,z}}}{1 - \frac{\chi_z \times |N_{Ed}|}{N_{cr,z}}} = \frac{1 - \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]}}{1 - \frac{0,94 \times |190,27[\text{kN}]|}{30519,41[\text{kN}]}} = 1,00$$

$$\varepsilon_y = \frac{|M_{y,Ed}|}{N_{Ed}} \times \frac{A}{W_{el,y}} = \frac{|162,63[\text{kNm}]|}{190,27[\text{kN}]} \times \frac{8,7360 \cdot 10^{-3}[\text{m}^2]}{7,4250 \cdot 10^{-4}[\text{m}^3]} = 10,06$$

$$a_{LT} = \max \left( 1 - \frac{I_t}{I_y}, 0 \right) = \max \left( 1 - \frac{2,6403 \cdot 10^{-4}[\text{m}^4]}{1,3201 \cdot 10^{-4}[\text{m}^4]}, 0 \right) = \max(-1,00, 0,00) = 0,00$$

$$M_{cr,0} = \frac{C_1 \times \pi^2 \times E \times I_z}{(k \times l_{LT})^2} \times \sqrt{\frac{\left( \frac{k}{k_w} \right)^2 \times I_w}{I_z} + \frac{(k \times l_{LT})^2 \times G \times I_t}{\pi^2 \times E \times I_z} + (C_2 \times z_g - C_3 \times z_j)^2 - (C_2 \times z_g - C_3 \times z_j)}$$

$$= \frac{1,00 \times \pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{(1,00 \times 4,508[\text{m}])^2} \times \sqrt{\frac{\left( \frac{1,00}{1,00} \right)^2 \times 7,8644 \cdot 10^{-39}[\text{m}^6]}{1,3201 \cdot 10^{-4}[\text{m}^4]} + \frac{(1,00 \times 4,508[\text{m}])^2 \times 80769,2[\text{MPa}] \times 2,6403 \cdot 10^{-4}[\text{m}^4]}{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]} + (0,26 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])^2 - (0,26 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])}$$

$$= 16944,23[\text{kNm}]$$

$$\lambda_{rel,0} = \sqrt{\frac{W_{pl,y} \times f_y}{M_{cr,0}}} = \sqrt{\frac{9,6680 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{16944,23[\text{kNm}]} = 0,14$$

$$\lambda_{rel,0,lim} = 0,2 \times \sqrt{C_1} \times \sqrt{\left( 1 - \frac{|N_{Ed}|}{N_{cr,z}} \right) \times \left( 1 - \frac{|N_{Ed}|}{N_{cr,T}} \right)} = 0,2 \times \sqrt{2,80} \times \sqrt{\left( 1 - \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]} \right) \times \left( 1 - \frac{|190,27[\text{kN}]|}{705626,73[\text{kN}]} \right)} = 0,33$$

$$C_{my} = C_{my,0} = 1,04$$

$$C_{mz} = C_{mz,0} = 1,00$$

$$C_{mLT} = 1,00$$

$$b_{LT} = 0,5 \times a_{LT} \times \lambda_{rel,0}^2 \times \frac{|M_{y,Ed}|}{\chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = 0,5 \times 0,00 \times 0,14^2 \times \frac{|162,63[\text{kNm}]|}{1,00 \times 343,21[\text{kNm}]} \times \frac{|95,35[\text{kNm}]|}{343,21[\text{kNm}]} = 0,00$$

$$c_{LT} = 10 \times a_{LT} \times \frac{\lambda_{rel,0}^2}{5 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 10 \times 0,00 \times \frac{0,14^2}{5 + 0,32^4} \times \frac{|162,63[\text{kNm}]|}{1,04 \times 1,00 \times 343,21[\text{kNm}]} = 0,00$$

$$d_{LT} = 2 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{C_{mz} \times M_{pl,z,Rd}}$$

$$= 2 \times 0,00 \times \frac{0,14}{0,1 + 0,32^4} \times \frac{|162,63[\text{kNm}]|}{1,04 \times 1,00 \times 343,21[\text{kNm}]} \times \frac{|95,35[\text{kNm}]|}{1,00 \times 343,21[\text{kNm}]} = 0,00$$

$$e_{LT} = 1,7 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 1,7 \times 0,00 \times \frac{0,14}{0,1 + 0,32^4} \times \frac{|162,63[\text{kNm}]|}{1,04 \times 1,00 \times 343,21[\text{kNm}]} = 0,00$$

$$w_y = \min \left( \frac{W_{pl,y}}{W_{el,y}}, 1,5 \right) = \min \left( \frac{9,6680 \cdot 10^{-4}[\text{m}^3]}{7,4250 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,30, 1,50) = 1,30$$

$$w_z = \min \left( \frac{W_{pl,z}}{W_{el,z}}, 1,5 \right) = \min \left( \frac{9,6680 \cdot 10^{-4}[\text{m}^3]}{7,4250 \cdot 10^{-4}[\text{m}^3]}, 1,5 \right) = \min(1,30, 1,50) = 1,30$$

$$n_{pl} = \frac{|N_{Ed}|}{\frac{N_{Rk}}{\gamma_{M1}}} = \frac{|190,27[\text{kN}]|}{\frac{3101,28[\text{kN}]}{1,10}} = 0,07$$

$$\lambda_{rel,max} = \max(\lambda_{rel,y}, \lambda_{rel,z}) = \max(0,82, 0,32) = 0,82$$

$$C_{yy} = \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max} - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max}^2 \right) \times n_{pl} - b_{LT} \right], \frac{W_{el,y}}{W_{pl,y}} \right\}$$

$$= \max \left\{ 1 + (1,30 - 1) \times \left[ \left( 2 - \frac{1,6}{1,30} \times 1,04^2 \times 0,82 - \frac{1,6}{1,30} \times 1,04^2 \times 0,82^2 \right) \times 0,07 - 0,00 \right], \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{1,00, 0,77\}$$

$$= 1,00$$

$$C_{yz} = \max \left\{ 1 + (w_z - 1) \times \left[ \left( 2 - 14 \times \frac{C_{mz}^2 \times \lambda_{rel,max}^2}{w_z^5} \right) \times n_{pl} - c_{LT} \right], 0,6 \times \sqrt{\frac{w_z}{w_y}} \times \frac{W_{el,z}}{W_{pl,z}} \right\}$$

$$= \max \left\{ 1 + (1,30 - 1) \times \left[ \left( 2 - 14 \times \frac{1,00^2 \times 0,82^2}{1,30^5} \right) \times 0,07 - 0,00 \right], 0,6 \times \sqrt{\frac{1,30}{1,30}} \times \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,99, 0,46\} = 0,99$$

$$C_{zy} = \max \left\{ 1 + (w_y - 1) \times \left[ \left( 2 - 14 \times \frac{C_{my}^2 \times \lambda_{rel,max}^2}{w_y^5} \right) \times n_{pl} - d_{LT} \right], 0,6 \times \sqrt{\frac{w_y}{w_z}} \times \frac{W_{el,y}}{W_{pl,y}} \right\}$$

$$= \max \left\{ 1 + (1,30 - 1) \times \left[ \left( 2 - 14 \times \frac{1,04^2 \times 0,82^2}{1,30^5} \right) \times 0,07 - 0,00 \right], 0,6 \times \sqrt{\frac{1,30}{1,30}} \times \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]} \right\} = \max\{0,98, 0,46\} = 0,98$$

$$C_{zz} = \max \left[ 1 + (w_z - 1) \times \left( 2 - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max} - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max}^2 - e_{LT} \right) \times n_{pl}, \frac{W_{el,z}}{W_{pl,z}} \right]$$

$$= \max \left[ 1 + (1,30 - 1) \times \left( 2 - \frac{1,6}{1,30} \times 1,00^2 \times 0,82 - \frac{1,6}{1,30} \times 1,00^2 \times 0,82^2 - 0,00 \right) \times 0,07, \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]} \right] = \max[1,00, 0,77] = 1,00$$

$$N_{Rk} = A \times f_y = 8,7360 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}] = 3101,28[\text{kN}]$$

$$M_{y,Rk} = W_{pl,y} \times f_y = 9,6680 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}] = 343,21[\text{kNm}]$$

$$M_{z,Rk} = W_{pl,z} \times f_y = 9,6680 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}] = 343,21[\text{kNm}]$$

$$k_{yy} = C_{my} \times C_{mLT} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{yy}} = 1,04 \times 1,00 \times \frac{0,98}{1 - \frac{|190,27[\text{kN}]|}{4559,12[\text{kN}]}} \times \frac{1}{1,00} = 1,07$$

$$k_{yz} = C_{mz} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{yz}} \times 0,6 \times \sqrt{\frac{w_z}{w_y}} = 1,00 \times \frac{0,98}{1 - \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]}} \times \frac{1}{0,99} \times 0,6 \times \sqrt{\frac{1,30}{1,30}} = 0,60$$

$$k_{zy} = C_{my} \times C_{mLT} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{zy}} \times 0,6 \times \sqrt{\frac{w_y}{w_z}} = 1,04 \times 1,00 \times \frac{1,00}{1 - \frac{|190,27[\text{kN}]|}{4559,12[\text{kN}]}} \times \frac{1}{0,98} \times 0,6 \times \sqrt{\frac{1,30}{1,30}} = 0,66$$

$$k_{zz} = C_{mz} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{zz}} = 1,00 \times \frac{1,00}{1 - \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]}} \times \frac{1}{1,00} = 1,01$$

$$\begin{aligned} \text{Unity check (6.61)} &= \frac{|N_{Ed}|}{\chi_y \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{yy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{yz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\ &= \frac{|190,27[\text{kN}]|}{0,65 \times \frac{3101,28[\text{kN}]}{1,10}} + 1,07 \times \frac{|162,63[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{343,21[\text{kNm}]}{1,10}} + 0,60 \times \frac{|95,35[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{343,21[\text{kNm}]}{1,10}} = \mathbf{0,84 \leq 1,00} \end{aligned}$$

$$\begin{aligned} \text{Unity check (6.62)} &= \frac{|N_{Ed}|}{\chi_z \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{zy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{zz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}} \\ &= \frac{|190,27[\text{kN}]|}{0,94 \times \frac{3101,28[\text{kN}]}{1,10}} + 0,66 \times \frac{|162,63[\text{kNm}]| + |0,00[\text{kNm}]|}{1,00 \times \frac{343,21[\text{kNm}]}{1,10}} + 1,01 \times \frac{|95,35[\text{kNm}]| + |0,00[\text{kNm}]|}{\frac{343,21[\text{kNm}]}{1,10}} = \mathbf{0,72 \leq 1,00} \end{aligned}$$


$$\text{Unity check} = \max(\text{Unity check (6.61)}, \text{Unity check (6.62)}) = \max(0,84, 0,72) = \mathbf{0,84 \leq 1,00}$$

The member satisfies the stability check.




## 4.5. Rubni stup nadstrešnice „S3“


### 4.5.1. Rezne sile niskog dijela nadstrešnice „S3“

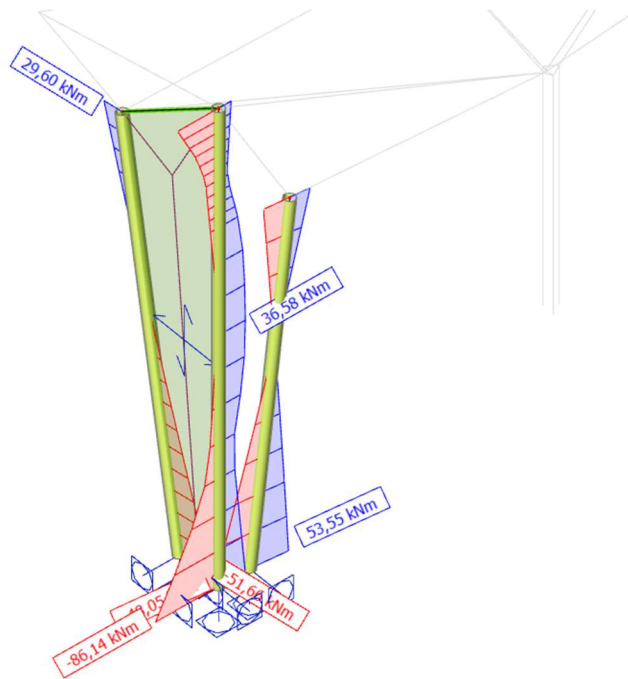


Slika 89: Moment savijanja  $M_y$  (kNm)- rubni stup nadstrešnice „S3“

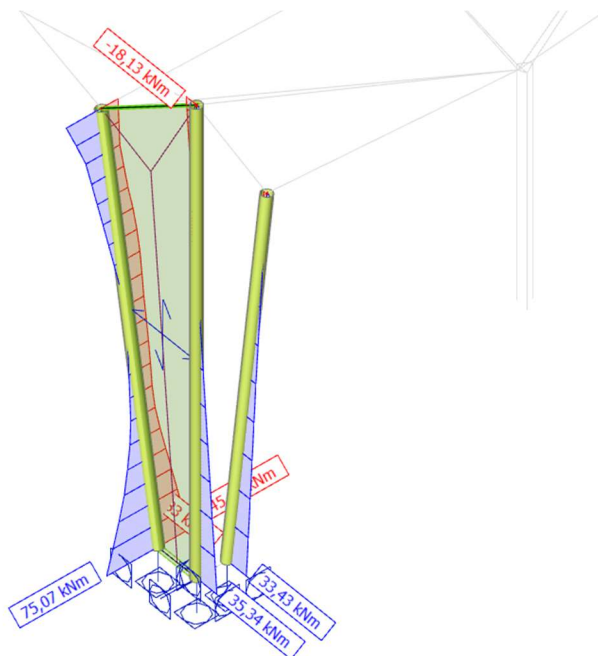


Slika 90: Moment savijanja  $M_z$  (kNm)- rubni stup nadstrešnice „S3“

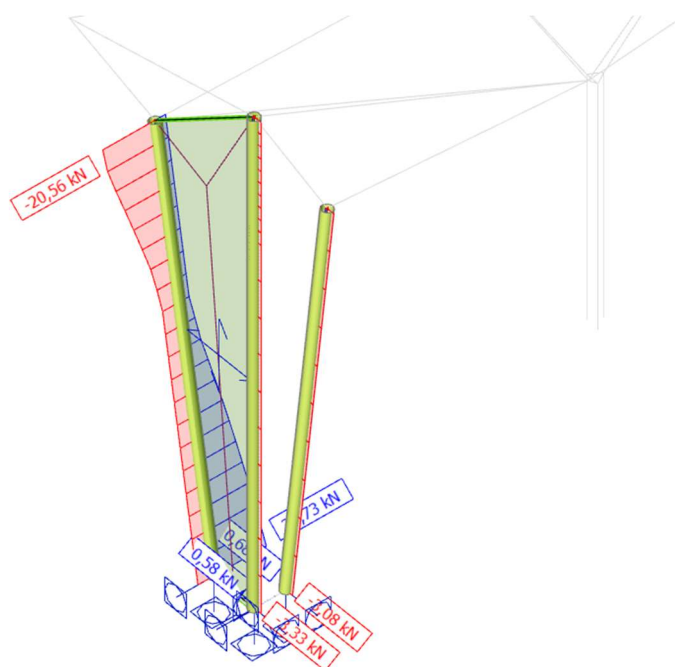

Slika 91: Poprečna sila  $V_y$  (kN)- rubni stup nadstrešnice,,S3“

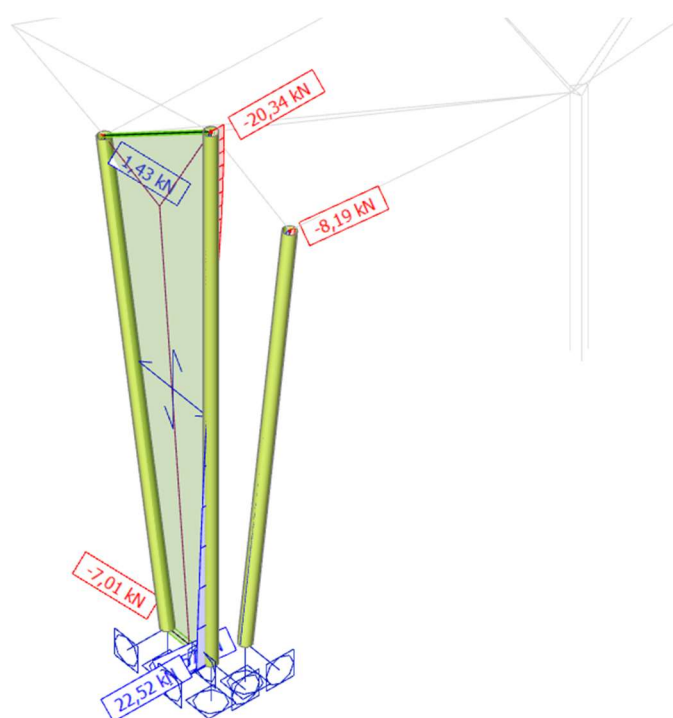


Slika 92: Poprečna sila  $V_z$  (kN)- rubni stup nadstrešnice,,S3“

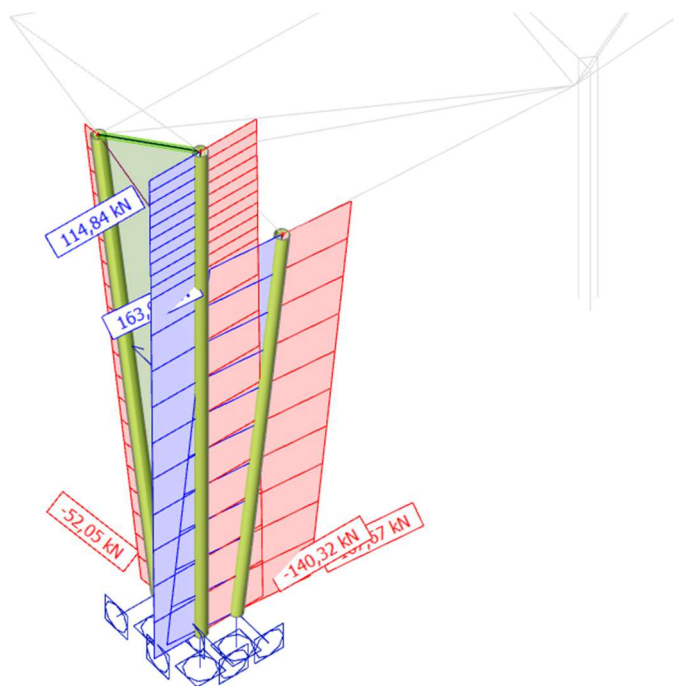

Slika 93: Uzdužna sila  $N(kN)$ - rubni stup nadstrešnice, „S3“

#### 4.5.2. Dimenzioniranje rubnog stupa nadstrešnice „S3“

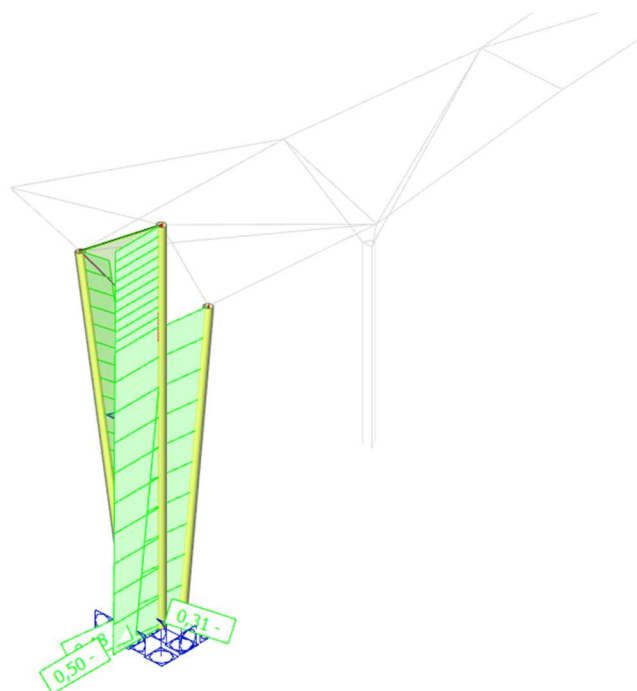

*Slika 94: Prikaz iskoristivosti rubnog stupa nadstrešnice „S3“*

## EC-EN 1993 Steel check ULS

Linear calculation  
 Combination: ULS-Set B (auto)  
 Coordinate system: Principal  
 Extreme 1D: Global  
 Selection: All

### EN 1993-1-1 Code Check

National annex: Standard EN

|                     |                        |                     |                    |              |                         |               |
|---------------------|------------------------|---------------------|--------------------|--------------|-------------------------|---------------|
| <b>Member B6203</b> | <b>0,000 / 4,508 m</b> | <b>CFCHS355.6X8</b> | <b>Cold formed</b> | <b>S 355</b> | <b>ULS-Set B (auto)</b> | <b>0,84 -</b> |
|---------------------|------------------------|---------------------|--------------------|--------------|-------------------------|---------------|

Note: EN 1993-1-3 article 1.1(3) specifies that this part does not apply to cold formed CHS and RHS sections. The default EN 1993-1-1 code check is executed instead of the EN 1993-1-3 code check.

| Combination key    |   |
|--------------------|---|
| ULS-Set B (auto) / | 1.35*G + 1.35*dg + 0.75*s + 1.50*T+ + 0.90*w3(pritisak) |

| Partial safety factors       |               |      |  |
|------------------------------|---------------|------|--|
| Resistance of cross-sections | $\gamma_{M0}$ | 1,00 |  |
| Resistance to instability    | $\gamma_{M1}$ | 1,10 |  |
| Resistance of net sections   | $\gamma_{M2}$ | 1,25 |  |

| Material          |       |       |     |
|-------------------|-------|-------|-----|
| Yield strength    | $f_y$ | 355,0 | MPa |
| Ultimate strength | $f_u$ | 490,0 | MPa |

....:SECTION CHECK:....

The critical check is on position 0,000 m

| Internal forces |            | Calculated | Unit |
|-----------------|------------|------------|------|
| Normal force    | $N_{Ed}$   | -190,27    | kN   |
| Shear force     | $V_{y,Ed}$ | 28,08      | kN   |
| Shear force     | $V_{z,Ed}$ | -61,39     | kN   |
| Torsion         | $T_{Ed}$   | 13,23      | kNm  |
| Bending moment  | $M_{y,Ed}$ | 162,63     | kNm  |
| Bending moment  | $M_{z,Ed}$ | 1,50       | kNm  |

### Classification for cross-section design

Classification according to EN 1993-1-1 article 5.5.2  
 Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d [mm] | t [mm] | d/t [-] | Class 1 Limit [-] | Class 2 Limit [-] | Class 3 Limit [-] | Class |
|--------|--------|---------|-------------------|-------------------|-------------------|-------|
| 356    | 8      | 44,5    | 33,1              | 46,3              | 59,6              | 2     |

The cross-section is classified as Class 2

### Compression check

According to EN 1993-1-1 article 6.2.4 and formula (6.9)

|                        |            |            |                |
|------------------------|------------|------------|----------------|
| Cross-section area     | A          | 8,7360e-03 | m <sup>2</sup> |
| Compression resistance | $N_{c,Rd}$ | 3101,28    | kN             |
| Unity check            |            | 0,06       | -              |

$$N_{c,Rd} = \frac{A \times f_y}{\gamma_{M0}} = \frac{8,7360 \cdot 10^{-3} [m^2] \times 355,0 [MPa]}{1,00} = 3101,28 [kN]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{c,Rd}} = \frac{|-190,27[\text{kN}]|}{3101,28[\text{kN}]} = \mathbf{0,06 \leq 1,00}$$

**Bending moment check for  $M_y$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,y}$    | 9,6680e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,y,Rd}$ | 343,21     | kNm            |
| Unity check             |               | 0,47       | -              |

$$M_{pl,y,Rd} = \frac{W_{pl,y} \times f_y}{\gamma_{M0}} = \frac{9,6680 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{1,00} = 343,21[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{y,Ed}|}{M_{pl,y,Rd}} = \frac{|162,63[\text{kNm}]|}{343,21[\text{kNm}]} = \mathbf{0,47 \leq 1,00}$$

**Bending moment check for  $M_z$** 

According to EN 1993-1-1 article 6.2.5 and formula (6.12),(6.13)

|                         |               |            |                |
|-------------------------|---------------|------------|----------------|
| Plastic section modulus | $W_{pl,z}$    | 9,6680e-04 | m <sup>3</sup> |
| Plastic bending moment  | $M_{pl,z,Rd}$ | 343,21     | kNm            |
| Unity check             |               | 0,00       | -              |

$$M_{pl,z,Rd} = \frac{W_{pl,z} \times f_y}{\gamma_{M0}} = \frac{9,6680 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{1,00} = 343,21[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = \frac{|1,50[\text{kNm}]|}{343,21[\text{kNm}]} = \mathbf{0,00 \leq 1,00}$$

**Shear check for  $V_y$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,5615e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_y$ | $V_{pl,y,Rd}$ | 1139,88    | kN             |
| Unity check                        |               | 0,02       | -              |

$$V_{pl,y,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,5615 \cdot 10^{-3}[\text{m}^2] \times \frac{355,0[\text{MPa}]}{\sqrt{3}}}{1,00} = 1139,88[\text{kN}]$$

$$\text{Unity check} = \frac{|V_{y,Ed}|}{V_{c,y,Rd}} = \frac{|28,08[\text{kN}]|}{1139,88[\text{kN}]} = \mathbf{0,02 \leq 1,00}$$

**Shear check for  $V_z$** 

According to EN 1993-1-1 article 6.2.6 and formula (6.17)

|                                    |               |            |                |
|------------------------------------|---------------|------------|----------------|
| Shear correction factor            | $\eta$        | 1,20       |                |
| Shear area                         | $A_v$         | 5,5615e-03 | m <sup>2</sup> |
| Plastic shear resistance for $V_z$ | $V_{pl,z,Rd}$ | 1139,88    | kN             |
| Unity check                        |               | 0,05       | -              |

$$V_{pl,z,Rd} = \frac{A_v \times \frac{f_y}{\sqrt{3}}}{\gamma_{M0}} = \frac{5,5615 \cdot 10^{-3}[\text{m}^2] \times \frac{355,0[\text{MPa}]}{\sqrt{3}}}{1,00} = 1139,88[\text{kN}]$$

$$\text{Unity check} = \frac{|V_{z,Ed}|}{V_{c,z,Rd}} = \frac{|-61,39[\text{kN}]|}{1139,88[\text{kN}]} = \mathbf{0,05 \leq 1,00}$$

**Torsion check**

According to EN 1993-1-1 article 6.2.7 and formula (6.23)

|                          |          |       |     |
|--------------------------|----------|-------|-----|
| Index of fibre           | Fibre    | 1     |     |
| Total torsional moment   | $T_{Ed}$ | 8,7   | MPa |
| Elastic shear resistance | $T_{Rd}$ | 205,0 | MPa |
| Unity check              |          | 0,04  | -   |

$$\tau_{Ed} = \left| \frac{T_{Ed}}{T_{Ed,unit}} \times \tau_{Ed,unit} \right| = \left| \frac{13,23[\text{kNm}]}{1,00[\text{kNm}]} \times 658,613[\text{kN/m}^2] \right| = 8,7[\text{MPa}]$$

$$\tau_{Rd} = \frac{f_y}{\sqrt{3} \times \gamma_{M0}} = \frac{355,0[\text{MPa}]}{\sqrt{3} \times 1,00} = 205,0[\text{MPa}]$$

$$\text{Unity check} = \frac{\tau_{Ed}}{\tau_{Rd}} = \frac{8,7[\text{MPa}]}{205,0[\text{MPa}]} = \mathbf{0,04} \leq \mathbf{1,00}$$

**Note:** The unity check for torsion is lower than the limit value of 0,05. Therefore torsion is considered as insignificant and is ignored in the combined checks.

### Combined bending, axial force and shear force check

According to EN 1993-1-1 article 6.2.9.1 and formula (6.31)

|  |                 |        |     |
|--|-----------------|--------|-----|
| Resultant bending moment                                 | $M_{resultant}$ | 162,64 | kNm |
| Resultant shear force                                    | $V_{resultant}$ | 67,51  | kN  |
| Design plastic moment resistance reduced due to $N_{Ed}$ | $M_{N,Rd}$      | 340,23 | kNm |
| Unity check  |                 | 0,48   | -   |

$$n = \frac{|N_{Ed}|}{N_{pl,Rd}} = \frac{|-190,27[\text{kN}]|}{3101,28[\text{kN}]} = 0,06$$

$$M_{N,Rd} = M_{pl,Rd} \times (1 - n^{1,7}) = 343,21[\text{kNm}] \times (1 - 0,06^{1,7}) = 340,23[\text{kNm}]$$

$$\text{Unity check} = \frac{|M_{resultant}|}{M_{N,Rd}} = \frac{162,64[\text{kNm}]}{340,23[\text{kNm}]} = \mathbf{0,48} \leq \mathbf{1,00}$$

**Note:** The resultant internal forces are used for CHS sections.

**Note:** Since the shear forces are less than half the plastic shear resistances their effect on the moment resistances is neglected.

The member satisfies the section check.

### ...:STABILITY CHECK:...:

#### Classification for member buckling design

Decisive position for stability classification: 0,000 m

Decisive utilisation factor  $\eta$ : 0,49

Classification according to EN 1993-1-1 article 5.5.2

Classification of Tubular sections according to EN 1993-1-1 Table 5.2 Sheet 3

| d [mm] | t [mm] | d/t [-] | Class 1 Limit [-] | Class 2 Limit [-] | Class 3 Limit [-] | Class |
|--------|--------|---------|-------------------|-------------------|-------------------|-------|
| 356    | 8      | 44,5    | 33,1              | 46,3              | 59,6              | 2     |

The cross-section is classified as Class 2

**Note:** The decisive position for the stability classification is based on the utilisation factor  $\eta$  according to Semi-Comp+.

#### Flexural Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)

| Buckling parameters |          | yy    | zz       |   |
|---------------------|----------|-------|----------|---|
| Sway type           |          | sway  | non-sway |   |
| System length       | L        | 4,508 | 4,508    | m |
| Buckling factor     | k        | 1,72  | 0,66     |   |
| Buckling length     | $l_{cr}$ | 7,747 | 2,994    | m |

| Buckling parameters  |                   | yy      | zz       |    |
|----------------------|-------------------|---------|----------|----|
| Critical Euler load  | $N_{cr}$          | 4559,12 | 30519,41 | kN |
| Slenderness          | $\lambda$         | 63,02   | 24,36    |    |
| Relative slenderness | $\lambda_{rel}$   | 0,82    | 0,32     |    |
| Limit slenderness    | $\lambda_{rel,0}$ | 0,20    | 0,20     |    |
| Buckling curve       |                   | c       | c        |    |
| Imperfection         | $\alpha$          | 0,49    | 0,49     |    |
| Reduction factor     | $\chi$            | 0,65    | 0,94     |    |
| Buckling resistance  | $N_{b,Rd}$        | 1823,02 | 2648,91  | kN |

| Flexural Buckling verification |            |            |                |
|--------------------------------|------------|------------|----------------|
| Cross-section area             | A          | 8,7360e-03 | m <sup>2</sup> |
| Buckling resistance            | $N_{b,Rd}$ | 1823,02    | kN             |
| Unity check                    |            | 0,10       | -              |

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{7,747[\text{m}]^2} = 4559,12[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{2,994[\text{m}]^2} = 30519,41[\text{kN}]$$

$$\lambda_y = \frac{l_{cr,y}}{i_y} = \frac{7,747[\text{m}]}{123[\text{mm}]} = 63,02$$

$$\lambda_z = \frac{l_{cr,z}}{i_z} = \frac{2,994[\text{m}]}{123[\text{mm}]} = 24,36$$

$$\lambda_{rel,y} = \frac{\lambda_y}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{63,02}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 0,82$$

$$\lambda_{rel,z} = \frac{\lambda_z}{\pi \times \sqrt{\frac{E}{f_y}}} = \frac{24,36}{\pi \times \sqrt{\frac{210000,0[\text{MPa}]}{355,0[\text{MPa}]}}} = 0,32$$

$$\varphi_y = 0,5 \times [1 + \alpha_y \times (\lambda_{rel,y} - \lambda_{rel,y,0}) + \lambda_{rel,y}^2] = 0,5 \times [1 + 0,49 \times (0,82 - 0,20) + 0,82^2] = 0,99$$

$$\varphi_z = 0,5 \times [1 + \alpha_z \times (\lambda_{rel,z} - \lambda_{rel,z,0}) + \lambda_{rel,z}^2] = 0,5 \times [1 + 0,49 \times (0,32 - 0,20) + 0,32^2] = 0,58$$

$$\chi_y = \min \left( \frac{1}{\varphi_y + \sqrt{\varphi_y^2 - \lambda_{rel,y}^2}}, 1 \right) = \min \left( \frac{1}{0,99 + \sqrt{0,99^2 - 0,82^2}}, 1 \right) = \min(0,65, 1) = 0,65$$

$$\chi_z = \min \left( \frac{1}{\varphi_z + \sqrt{\varphi_z^2 - \lambda_{rel,z}^2}}, 1 \right) = \min \left( \frac{1}{0,58 + \sqrt{0,58^2 - 0,32^2}}, 1 \right) = \min(0,94, 1) = 0,94$$

$$N_{b,y,Rd} = \frac{\chi_y \times A \times f_y}{\gamma_{M1}} = \frac{0,65 \times 8,7360 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 1823,02[\text{kN}]$$

$$N_{b,z,Rd} = \frac{\chi_z \times A \times f_y}{\gamma_{M1}} = \frac{0,94 \times 8,7360 \cdot 10^{-3}[\text{m}^2] \times 355,0[\text{MPa}]}{1,10} = 2648,91[\text{kN}]$$

$$N_{b,Rd} = \min(N_{b,y,Rd}, N_{b,z,Rd}) = \min(1823,02[\text{kN}], 2648,91[\text{kN}]) = 1823,02[\text{kN}]$$

$$\text{Unity check} = \frac{|N_{Ed}|}{N_{b,Rd}} = \frac{|-190,27[\text{kN}]|}{1823,02[\text{kN}]} = 0,10 \leq 1,00$$

#### Torsional(-Flexural) Buckling check

According to EN 1993-1-1 article 6.3.1.1 and formula (6.46)



**Note:** The cross-section concerns a CHS section which is not susceptible to Torsional(-Flexural) Buckling.

#### Lateral Torsional Buckling check

According to EN 1993-1-1 article 6.3.2.1

**Note:** The cross-section concerns a CHS section which is not susceptible to Lateral Torsional Buckling.

#### Bending and axial compression check

According to EN 1993-1-1 article 6.3.3 and formula (6.61),(6.62)

| Bending and axial compression check parameters |                   |                      |                |
|--|-------------------|----------------------|----------------|
| Interaction method                             |                   | alternative method 1 |                |
| Cross-section area                             | A                 | 8,7360e-03           | m <sup>2</sup> |
| Plastic section modulus                        | W <sub>pl,y</sub> | 9,6680e-04           | m <sup>3</sup> |
| Plastic section modulus                        | W <sub>pl,z</sub> | 9,6680e-04           | m <sup>3</sup> |
| Design compression force                       | N <sub>Ed</sub>   | 190,27               | kN             |
| Design bending moment (maximum)                | M <sub>y,Ed</sub> | 162,63               | kNm            |
| Design bending moment (maximum)                | M <sub>z,Ed</sub> | 95,35                | kNm            |
| Characteristic compression resistance          | N <sub>Rk</sub>   | 3101,28              | kN             |
| Characteristic moment resistance               | M <sub>y,Rk</sub> | 343,21               | kNm            |
| Characteristic moment resistance               | M <sub>z,Rk</sub> | 343,21               | kNm            |
| Reduction factor                               | χ <sub>y</sub>    | 0,65                 |                |
| Reduction factor                               | χ <sub>z</sub>    | 0,94                 |                |
| Reduction factor                               | χ <sub>LT</sub>   | 1,00                 |                |
| Interaction factor                             | k <sub>yy</sub>   | 1,07                 |                |
| Interaction factor                             | k <sub>yz</sub>   | 0,60                 |                |
| Interaction factor                             | k <sub>zy</sub>   | 0,66                 |                |
| Interaction factor                             | k <sub>zz</sub>   | 1,01                 |                |

Maximum moment M<sub>y,Ed</sub> is derived from beam B6203 position 0,000 m.

Maximum moment M<sub>z,Ed</sub> is derived from beam B6203 position 4,508 m.

| Interaction method 1 parameters                       |                        |                            |                |
|---|------------------------|----------------------------|----------------|
| Critical Euler load                                   | N <sub>cr,y</sub>      | 4559,12                    | kN             |
| Critical Euler load                                   | N <sub>cr,z</sub>      | 30519,41                   | kN             |
| Elastic critical load                                 | N <sub>cr,T</sub>      | 705626,73                  | kN             |
| Plastic section modulus                               | W <sub>pl,y</sub>      | 9,6680e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,y</sub>      | 7,4250e-04                 | m <sup>3</sup> |
| Plastic section modulus                               | W <sub>pl,z</sub>      | 9,6680e-04                 | m <sup>3</sup> |
| Elastic section modulus                               | W <sub>el,z</sub>      | 7,4250e-04                 | m <sup>3</sup> |
| Second moment of area                                 | I <sub>y</sub>         | 1,3201e-04                 | m <sup>4</sup> |
| Second moment of area                                 | I <sub>z</sub>         | 1,3201e-04                 | m <sup>4</sup> |
| Torsional constant                                    | I <sub>t</sub>         | 2,6403e-04                 | m <sup>4</sup> |
| Method for equivalent moment factor C <sub>my,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>y,Ed</sub>      | 162,63                     | kNm            |
| Maximum relative deflection                           | δ <sub>z</sub>         | 23,2                       | mm             |
| Equivalent moment factor                              | C <sub>my,0</sub>      | 1,04                       |                |
| Method for equivalent moment factor C <sub>mz,0</sub> |                        | Table A.2 Line 2 (General) |                |
| Design bending moment (maximum)                       | M <sub>z,Ed</sub>      | 95,35                      | kNm            |
| Maximum relative deflection                           | δ <sub>y</sub>         | 10,2                       | mm             |
| Equivalent moment factor                              | C <sub>mz,0</sub>      | 1,00                       |                |
| Factor  | μ <sub>y</sub>         | 0,98                       |                |
| Factor  | μ <sub>z</sub>         | 1,00                       |                |
| Factor  | ε <sub>y</sub>         | 10,06                      |                |
| Factor  | a <sub>LT</sub>        | 0,00                       |                |
| Critical moment for uniform bending                   | M <sub>cr,0</sub>      | 16944,23                   | kNm            |
| Relative slenderness                                  | λ <sub>rel,0</sub>     | 0,14                       |                |
| Limit relative slenderness                            | λ <sub>rel,0,lim</sub> | 0,33                       |                |
| Equivalent moment factor                              | C <sub>my</sub>        | 1,04                       |                |
| Equivalent moment factor                              | C <sub>mz</sub>        | 1,00                       |                |
| Equivalent moment factor                              | C <sub>mLT</sub>       | 1,00                       |                |

| Interaction method 1 parameters |                     |      |
|---------------------------------|---------------------|------|
| Factor                          | $b_{LT}$            | 0,00 |
| Factor                          | $c_{LT}$            | 0,00 |
| Factor                          | $d_{LT}$            | 0,00 |
| Factor                          | $e_{LT}$            | 0,00 |
| Factor                          | $w_y$               | 1,30 |
| Factor                          | $w_z$               | 1,30 |
| Factor                          | $\eta_{pl}$         | 0,07 |
| Maximum relative slenderness    | $\lambda_{rel,max}$ | 0,82 |
| Factor                          | $C_{yy}$            | 1,00 |
| Factor                          | $C_{yz}$            | 0,99 |
| Factor                          | $C_{zy}$            | 0,98 |
| Factor                          | $C_{zz}$            | 1,00 |

$$\text{Unity check (6.61)} = 0,10 + 0,56 + 0,18 = 0,84 -$$

$$\text{Unity check (6.62)} = 0,07 + 0,34 + 0,31 = 0,72 -$$

$$N_{cr,y} = \frac{\pi^2 \times E \times I_y}{l_{cr,y}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{7,747[\text{m}]^2} = 4559,12[\text{kN}]$$

$$N_{cr,z} = \frac{\pi^2 \times E \times I_z}{l_{cr,z}^2} = \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{2,994[\text{m}]^2} = 30519,41[\text{kN}]$$

$$N_{cr,T} = \frac{1}{i_0^2} \times \left( G \times I_t + \frac{\pi^2 \times E \times I_w}{l_{cr}^2} \right) = \frac{1}{174[\text{mm}]^2} \times \left( 80769,2[\text{MPa}] \times 2,6403 \cdot 10^{-4}[\text{m}^4] + \frac{\pi^2 \times 210000,0[\text{MPa}] \times 7,8644 \cdot 10^{-39}[\text{m}^6]}{4,508[\text{m}]^2} \right) = 705626,73[\text{kN}]$$

$$C_{m,y,0} = 1 + \left( \frac{\pi^2 \times E \times I_y \times |\delta_z|}{L^2 \times |M_{y,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,y}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4] \times |23,2[\text{mm}]|}{4,508[\text{m}]^2 \times |162,63[\text{kNm}]|} - 1 \right) \times \frac{|190,27[\text{kN}]|}{4559,12[\text{kN}]} = 1,04$$

$$C_{m,z,0} = 1 + \left( \frac{\pi^2 \times E \times I_z \times |\delta_y|}{L^2 \times |M_{z,Ed}|} - 1 \right) \times \frac{|N_{Ed}|}{N_{cr,z}} = 1 + \left( \frac{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4] \times |10,2[\text{mm}]|}{4,508[\text{m}]^2 \times |95,35[\text{kNm}]|} - 1 \right) \times \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]} = 1,00$$

$$\mu_y = \frac{1 - \frac{|N_{Ed}|}{N_{cr,y}}}{1 - \frac{\chi_y \times |N_{Ed}|}{N_{cr,y}}} = \frac{1 - \frac{|190,27[\text{kN}]|}{4559,12[\text{kN}]}}{1 - \frac{0,65 \times |190,27[\text{kN}]|}{4559,12[\text{kN}]}} = 0,98$$

$$\mu_z = \frac{1 - \frac{|N_{Ed}|}{N_{cr,z}}}{1 - \frac{\chi_z \times |N_{Ed}|}{N_{cr,z}}} = \frac{1 - \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]}}{1 - \frac{0,94 \times |190,27[\text{kN}]|}{30519,41[\text{kN}]}} = 1,00$$

$$\varepsilon_y = \left| \frac{M_{y,Ed}}{N_{Ed}} \right| \times \frac{A}{W_{el,y}} = \left| \frac{162,63[\text{kNm}]}{190,27[\text{kN}]} \right| \times \frac{8,7360 \cdot 10^{-3}[\text{m}^2]}{7,4250 \cdot 10^{-4}[\text{m}^3]} = 10,06$$

$$a_{LT} = \max \left( 1 - \frac{l_t}{l_y}, 0 \right) = \max \left( 1 - \frac{2,6403 \cdot 10^{-4}[\text{m}^4]}{1,3201 \cdot 10^{-4}[\text{m}^4]}, 0 \right) = \max(-1,00, 0,00) = 0,00$$

$$M_{cr,0} = \frac{C_1 \times \pi^2 \times E \times I_z}{(k \times l_{LT})^2} \times \left[ \sqrt{\frac{\left( \frac{k}{k_w} \right)^2 \times I_w}{I_z} + \frac{(k \times l_{LT})^2 \times G \times I_t}{\pi^2 \times E \times I_z} + (C_2 \times z_g - C_3 \times z_j)^2} - (C_2 \times z_g - C_3 \times z_j) \right] \\ = \frac{1,00 \times \pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]}{(1,00 \times 4,508[\text{m}])^2} \\ \times \left[ \sqrt{\frac{\left( \frac{1,00}{1,00} \right)^2 \times 7,8644 \cdot 10^{-39}[\text{m}^6]}{1,3201 \cdot 10^{-4}[\text{m}^4]} + \frac{(1,00 \times 4,508[\text{m}])^2 \times 80769,2[\text{MPa}] \times 2,6403 \cdot 10^{-4}[\text{m}^4]}{\pi^2 \times 210000,0[\text{MPa}] \times 1,3201 \cdot 10^{-4}[\text{m}^4]} + (0,26 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])^2} - (0,26 \times 0[\text{mm}] - 1,00 \times 0[\text{mm}])} \right] \\ = 16944,23[\text{kNm}]$$

$$\lambda_{rel,0} = \sqrt{\frac{W_{pl,y} \times f_y}{M_{cr,0}}} = \sqrt{\frac{9,6680 \cdot 10^{-4}[\text{m}^3] \times 355,0[\text{MPa}]}{16944,23[\text{kNm}]} = 0,14$$

$$\lambda_{rel,0,lim} = 0,2 \times \sqrt{C_1} \times \sqrt[4]{\left(1 - \frac{|N_{Ed}|}{N_{cr,z}}\right) \times \left(1 - \frac{|N_{Ed}|}{N_{cr,T}}\right)} = 0,2 \times \sqrt{2,80} \times \sqrt[4]{\left(1 - \frac{|190,27[\text{kN}]|}{30519,41[\text{kN}]}\right) \times \left(1 - \frac{|190,27[\text{kN}]|}{705626,73[\text{kN}]}\right)} = 0,33$$

$$C_{my} = C_{my,0} = 1,04$$

$$C_{mz} = C_{mz,0} = 1,00$$

$$C_{mLT} = 1,00$$

$$b_{LT} = 0,5 \times a_{LT} \times \lambda_{rel,0}^2 \times \frac{|M_{y,Ed}|}{\chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{M_{pl,z,Rd}} = 0,5 \times 0,00 \times 0,14^2 \times \frac{|162,63[\text{kNm}]|}{1,00 \times 343,21[\text{kNm}]} \times \frac{|95,35[\text{kNm}]|}{343,21[\text{kNm}]} = 0,00$$

$$c_{LT} = 10 \times a_{LT} \times \frac{\lambda_{rel,0}^2}{5 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 10 \times 0,00 \times \frac{0,14^2}{5 + 0,32^4} \times \frac{|162,63[\text{kNm}]|}{1,04 \times 1,00 \times 343,21[\text{kNm}]} = 0,00$$

$$d_{LT} = 2 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} \times \frac{|M_{z,Ed}|}{C_{mz} \times M_{pl,z,Rd}}$$

$$= 2 \times 0,00 \times \frac{0,14}{0,1 + 0,32^4} \times \frac{|162,63[\text{kNm}]|}{1,04 \times 1,00 \times 343,21[\text{kNm}]} \times \frac{|95,35[\text{kNm}]|}{1,00 \times 343,21[\text{kNm}]} = 0,00$$

$$e_{LT} = 1,7 \times a_{LT} \times \frac{\lambda_{rel,0}}{0,1 + \lambda_{rel,z}^4} \times \frac{|M_{y,Ed}|}{C_{my} \times \chi_{LT} \times M_{pl,y,Rd}} = 1,7 \times 0,00 \times \frac{0,14}{0,1 + 0,32^4} \times \frac{|162,63[\text{kNm}]|}{1,04 \times 1,00 \times 343,21[\text{kNm}]} = 0,00$$

$$w_y = \min\left(\frac{W_{pl,y}}{W_{el,y}}, 1,5\right) = \min\left(\frac{9,6680 \cdot 10^{-4}[\text{m}^3]}{7,4250 \cdot 10^{-4}[\text{m}^3]}, 1,5\right) = \min(1,30, 1,50) = 1,30$$

$$w_z = \min\left(\frac{W_{pl,z}}{W_{el,z}}, 1,5\right) = \min\left(\frac{9,6680 \cdot 10^{-4}[\text{m}^3]}{7,4250 \cdot 10^{-4}[\text{m}^3]}, 1,5\right) = \min(1,30, 1,50) = 1,30$$

$$n_{pl} = \frac{|N_{Ed}|}{\frac{N_{Rk}}{\gamma_{M1}}} = \frac{|190,27[\text{kN}]|}{\frac{3101,28[\text{kN}]}{1,10}} = 0,07$$

$$\lambda_{rel,max} = \max(\lambda_{rel,y}, \lambda_{rel,z}) = \max(0,82, 0,32) = 0,82$$

$$C_{yy} = \max\left\{1 + (w_y - 1) \times \left[\left(2 - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max} - \frac{1,6}{w_y} \times C_{my}^2 \times \lambda_{rel,max}^2\right) \times n_{pl} - b_{LT}\right], \frac{W_{el,y}}{W_{pl,y}}\right\}$$

$$= \max\left\{1 + (1,30 - 1) \times \left[\left(2 - \frac{1,6}{1,30} \times 1,04^2 \times 0,82 - \frac{1,6}{1,30} \times 1,04^2 \times 0,82^2\right) \times 0,07 - 0,00\right], \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]}\right\} = \max\{1,00, 0,77\}$$

$$= 1,00$$

$$C_{yz} = \max\left\{1 + (w_z - 1) \times \left[\left(2 - 14 \times \frac{C_{mz}^2 \times \lambda_{rel,max}^2}{w_z^5}\right) \times n_{pl} - c_{LT}\right], 0,6 \times \sqrt{\frac{w_z}{w_y}} \times \frac{W_{el,z}}{W_{pl,z}}\right\}$$

$$= \max\left\{1 + (1,30 - 1) \times \left[\left(2 - 14 \times \frac{1,00^2 \times 0,82^2}{1,30^5}\right) \times 0,07 - 0,00\right], 0,6 \times \sqrt{\frac{1,30}{1,30}} \times \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]}\right\} = \max\{0,99, 0,46\} = 0,99$$

$$C_{zy} = \max\left\{1 + (w_y - 1) \times \left[\left(2 - 14 \times \frac{C_{my}^2 \times \lambda_{rel,max}^2}{w_y^5}\right) \times n_{pl} - d_{LT}\right], 0,6 \times \sqrt{\frac{w_y}{w_z}} \times \frac{W_{el,y}}{W_{pl,y}}\right\}$$

$$= \max\left\{1 + (1,30 - 1) \times \left[\left(2 - 14 \times \frac{1,04^2 \times 0,82^2}{1,30^5}\right) \times 0,07 - 0,00\right], 0,6 \times \sqrt{\frac{1,30}{1,30}} \times \frac{7,4250 \cdot 10^{-4}[\text{m}^3]}{9,6680 \cdot 10^{-4}[\text{m}^3]}\right\} = \max\{0,98, 0,46\} = 0,98$$

$$C_{zz} = \max \left[ 1 + (w_z - 1) \times \left( 2 - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max} - \frac{1,6}{w_z} \times C_{mz}^2 \times \lambda_{rel,max}^2 - e_{LT} \right) \times n_{pl}, \frac{W_{el,z}}{W_{pl,z}} \right]$$

$$= \max \left[ 1 + (1,30 - 1) \times \left( 2 - \frac{1,6}{1,30} \times 1,00^2 \times 0,82 - \frac{1,6}{1,30} \times 1,00^2 \times 0,82^2 - 0,00 \right) \times 0,07, \frac{7,4250 \cdot 10^{-4} [m^3]}{9,6680 \cdot 10^{-4} [m^3]} \right] = \max [1,00, 0,77] = 1,00$$

$$N_{Rk} = A \times f_y = 8,7360 \cdot 10^{-3} [m^2] \times 355,0 [MPa] = 3101,28 [kN]$$

$$M_{y,Rk} = W_{pl,y} \times f_y = 9,6680 \cdot 10^{-4} [m^3] \times 355,0 [MPa] = 343,21 [kNm]$$

$$M_{z,Rk} = W_{pl,z} \times f_y = 9,6680 \cdot 10^{-4} [m^3] \times 355,0 [MPa] = 343,21 [kNm]$$

$$k_{yy} = C_{my} \times C_{mLT} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{yy}} = 1,04 \times 1,00 \times \frac{0,98}{1 - \frac{190,27 [kN]}{4559,12 [kN]}} \times \frac{1}{1,00} = 1,07$$

$$k_{yz} = C_{mz} \times \frac{\mu_y}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{yz}} \times 0,6 \times \sqrt{\frac{w_z}{w_y}} = 1,00 \times \frac{0,98}{1 - \frac{190,27 [kN]}{30519,41 [kN]}} \times \frac{1}{0,99} \times 0,6 \times \sqrt{\frac{1,30}{1,30}} = 0,60$$

$$k_{zy} = C_{my} \times C_{mLT} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,y}}} \times \frac{1}{C_{zy}} \times 0,6 \times \sqrt{\frac{w_y}{w_z}} = 1,04 \times 1,00 \times \frac{1,00}{1 - \frac{190,27 [kN]}{4559,12 [kN]}} \times \frac{1}{0,98} \times 0,6 \times \sqrt{\frac{1,30}{1,30}} = 0,66$$

$$k_{zz} = C_{mz} \times \frac{\mu_z}{1 - \frac{|N_{Ed}|}{N_{cr,z}}} \times \frac{1}{C_{zz}} = 1,00 \times \frac{1,00}{1 - \frac{190,27 [kN]}{30519,41 [kN]}} \times \frac{1}{1,00} = 1,01$$

$$\text{Unity check (6.61)} = \frac{|N_{Ed}|}{\chi_y \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{yy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{yz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}}$$

$$= \frac{190,27 [kN]}{0,65 \times \frac{3101,28 [kN]}{1,10}} + 1,07 \times \frac{162,63 [kNm] + |0,00 [kNm]|}{1,00 \times \frac{343,21 [kNm]}{1,10}} + 0,60 \times \frac{95,35 [kNm] + |0,00 [kNm]|}{\frac{343,21 [kNm]}{1,10}} = \mathbf{0,84 \leq 1,00}$$


$$\text{Unity check (6.62)} = \frac{|N_{Ed}|}{\chi_z \times \frac{N_{Rk}}{\gamma_{M1}}} + k_{zy} \times \frac{|M_{y,Ed}| + |\Delta M_{y,Ed}|}{\chi_{LT} \times \frac{M_{y,Rk}}{\gamma_{M1}}} + k_{zz} \times \frac{|M_{z,Ed}| + |\Delta M_{z,Ed}|}{\frac{M_{z,Rk}}{\gamma_{M1}}}$$

$$= \frac{190,27 [kN]}{0,94 \times \frac{3101,28 [kN]}{1,10}} + 0,66 \times \frac{162,63 [kNm] + |0,00 [kNm]|}{1,00 \times \frac{343,21 [kNm]}{1,10}} + 1,01 \times \frac{95,35 [kNm] + |0,00 [kNm]|}{\frac{343,21 [kNm]}{1,10}} = \mathbf{0,72 \leq 1,00}$$

$$\text{Unity check} = \max(\text{Unity check (6.61)}, \text{Unity check (6.62)}) = \max(0,84, 0,72) = \mathbf{0,84 \leq 1,00}$$

The member satisfies the stability check.


## 4.5.3. Granično stanje uporabljivosti

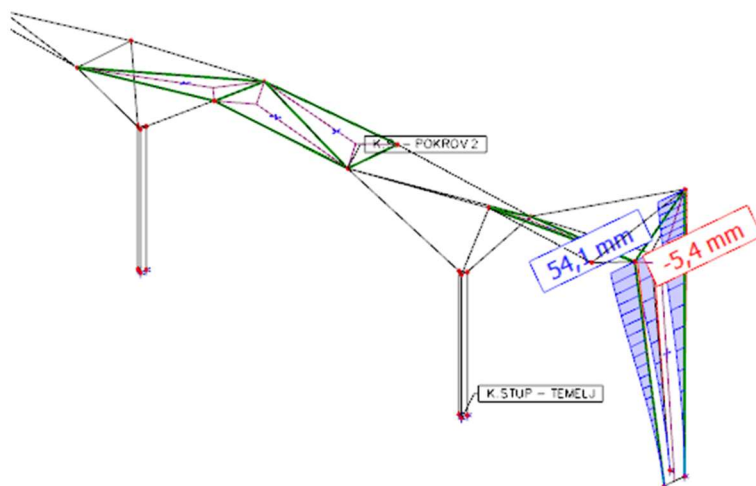

Slika 95: Prikaz pomaka trostrukih stupova „S1“ (mm)

|                                | $u_z$                |
|--------------------------------|----------------------|
| Maksimalni pomak $u =$         | 54,1 mm              |
| Duljina nosača $L =$           | 16,00 m              |
| Dopušteni pomak $f_{p,dop.} =$ | 106,7 mm ( $L/200$ ) |

$$f_{max.} = 54,1 \text{ mm} < f_{p,dop.} = 106,7 \text{ mm}$$

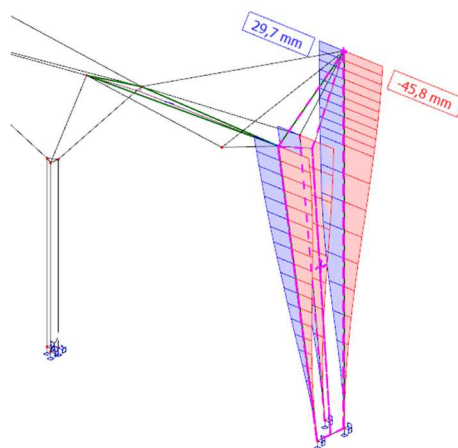

Slika 96: Prikaz pomaka trostrukih stupova „S1“ (mm)

|                                | $u_z$                |
|--------------------------------|----------------------|
| Maksimalni pomak $u =$         | 45,8 mm              |
| Duljina nosača $L =$           | 16,00 m              |
| Dopušteni pomak $f_{p,dop.} =$ | 106,7 mm ( $L/200$ ) |

$$f_{max.} = 45,8 \text{ mm} < f_{p,dop.} = 106,7 \text{ mm}$$

## 5. Dimenzioniranje spojeva


### 5.1. Spoj stupa „S1“ sa temeljem

#### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5781                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

#### Beams and columns

| Name   | Cross-section         | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|--------|-----------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B5640  | 1 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| M12480 | 1 - CHS(cf)219.1/12.5 | 90.0                    | -90.0                | 0.0                     | 0              | 0              | 430            | Position  |
| M12481 | 1 - CHS(cf)219.1/12.5 | 0.0                     | -90.0                | 0.0                     | 0              | -215           | -370           | Position  |

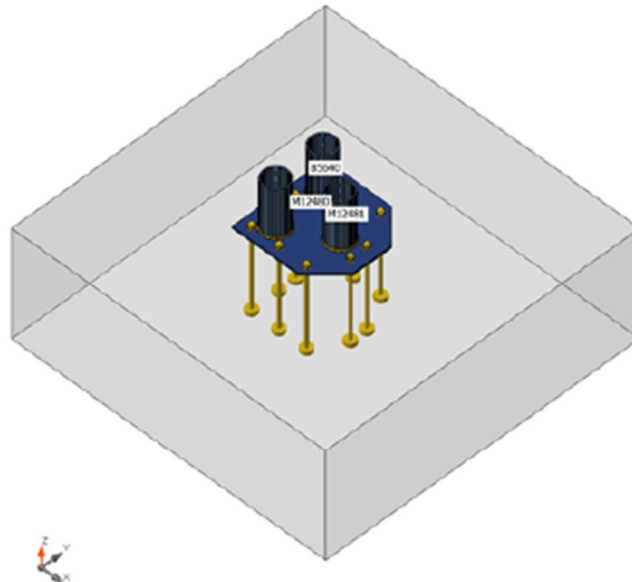

#### Cross-sections

| Name                  | Material |
|-----------------------|----------|
| 1 - CHS(cf)219.1/12.5 | S 355    |

#### Anchors

| Name     | Bolt assembly | Diameter [mm] | $f_u$ [MPa] | Gross area [mm <sup>2</sup> ] |
|----------|---------------|---------------|-------------|-------------------------------|
| M30 10.9 | M30 10.9      | 30            | 1000.0      | 707                           |

## Load effects (forces in equilibrium)

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(2)  | B5640  | -176.6    | 8.0        | 1.8        | 2.4         | -8.0        | 33.4        |
|             | M12480 | -176.6    | 8.0        | 1.8        | 2.4         | -8.0        | 33.4        |
|             | M12481 | -176.6    | 8.0        | 1.8        | 2.4         | -8.0        | 33.4        |
| ULS-Set(6)  | B5640  | -169.0    | 3.9        | 2.1        | 4.5         | -9.2        | 17.2        |
|             | M12480 | -169.0    | 3.9        | 2.1        | 4.5         | -9.2        | 17.2        |
|             | M12481 | -169.0    | 3.9        | 2.1        | 4.5         | -9.2        | 17.2        |
| ULS-Set(7)  | B5640  | -132.4    | 6.9        | 1.5        | 1.2         | -6.7        | 28.6        |
|             | M12480 | -132.4    | 6.9        | 1.5        | 1.2         | -6.7        | 28.6        |
|             | M12481 | -132.4    | 6.9        | 1.5        | 1.2         | -6.7        | 28.6        |
| ULS-Set(10) | B5640  | -150.8    | 3.4        | 0.1        | 4.4         | -0.1        | 15.3        |
|             | M12480 | -150.8    | 3.4        | 0.1        | 4.4         | -0.1        | 15.3        |
|             | M12481 | -150.8    | 3.4        | 0.1        | 4.4         | -0.1        | 15.3        |
| ULS-Set(11) | B5640  | -158.1    | 7.7        | -0.2       | 2.4         | 1.0         | 32.0        |
|             | M12480 | -158.1    | 7.7        | -0.2       | 2.4         | 1.0         | 32.0        |
|             | M12481 | -158.1    | 7.7        | -0.2       | 2.4         | 1.0         | 32.0        |
| ULS-Set(18) | B5640  | -169.3    | 3.7        | 2.1        | 4.5         | -9.2        | 16.7        |
|             | M12480 | -169.3    | 3.7        | 2.1        | 4.5         | -9.2        | 16.7        |
|             | M12481 | -169.3    | 3.7        | 2.1        | 4.5         | -9.2        | 16.7        |
| S18-1.      | B5640  | -273.9    | -8.1       | 29.9       | -0.5        | 71.9        | 19.8        |
|             | M12480 | -273.9    | -8.1       | 29.9       | -0.5        | 71.9        | 19.8        |
|             | M12481 | -273.9    | -8.1       | 29.9       | -0.5        | 71.9        | 19.8        |
| S18-2.      | B5640  | -273.9    | -5.5       | 19.6       | -0.5        | 71.9        | 15.8        |
|             | M12480 | -273.9    | -5.5       | 19.6       | -0.5        | 71.9        | 15.8        |
|             | M12481 | -273.9    | -5.5       | 19.6       | -0.5        | 71.9        | 15.8        |
| S18-3.      | B5640  | 54.0      | 7.0        | -23.5      | -0.5        | 71.9        | -12.2       |
|             | M12480 | 54.0      | 7.0        | -23.5      | -0.5        | 71.9        | -12.2       |
|             | M12481 | 54.0      | 7.0        | -23.5      | -0.5        | 71.9        | -12.2       |
| S18-4.      | B5640  | -272.2    | -5.7       | 27.4       | -0.5        | 71.9        | 14.6        |
|             | M12480 | -272.2    | -5.7       | 27.4       | -0.5        | 71.9        | 14.6        |
|             | M12481 | -272.2    | -5.7       | 27.4       | -0.5        | 71.9        | 14.6        |

## Foundation block

| Item                 | Value       | Unit |
|----------------------|-------------|------|
| <b>CB 1</b>          |             |      |
| Dimensions           | 2850 x 2850 | mm   |
| Depth                | 1000        | mm   |
| Anchor               | M30 10.9    |      |
| Anchoring length     | 700         | mm   |
| Shear force transfer | Friction    |      |

**Check****Summary**

| Name           | Value          | Status |
|----------------|----------------|--------|
| Analysis       | 100.0%         | OK     |
| Plates         | 0.6 < 5.0%     | OK     |
| Anchors        | 69.3 < 100%    | OK     |
| Welds          | 98.4 < 100%    | OK     |
| Concrete block | 63.7 < 100%    | OK     |
| Shear          | 25.7 < 100%    | OK     |
| Buckling       | Not calculated |        |

**Plates**

| Name   | Thickness [mm] | Loads  | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|--------|----------------|--------|---------------------|---------------------|----------------------|--------|
| B5640  | 12.5           | S18-3. | 306.3               | 0.0                 | 0.0                  | OK     |
| M12480 | 12.5           | S18-3. | 294.5               | 0.0                 | 0.0                  | OK     |
| M12481 | 12.5           | S18-3. | 355.5               | 0.3                 | 0.0                  | OK     |
| SP1    | 20.0           | S18-3. | 356.3               | 0.6                 | 0.0                  | OK     |


**Design data**

| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |

**Symbol explanation**

|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |




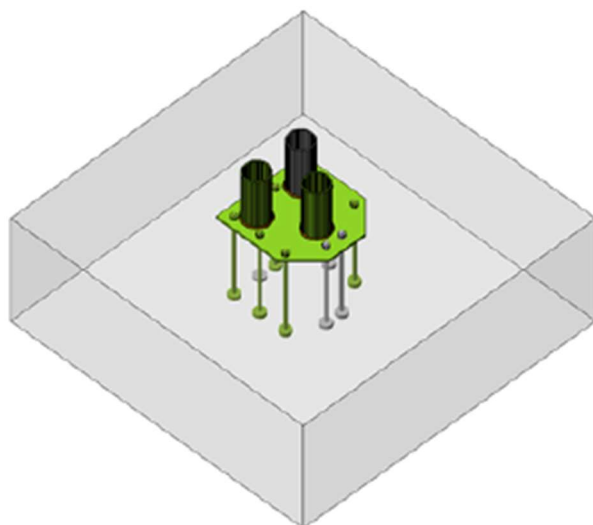


Overall check, S18-3.



Strain check, S18-3.

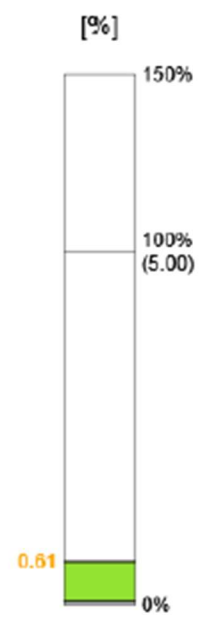

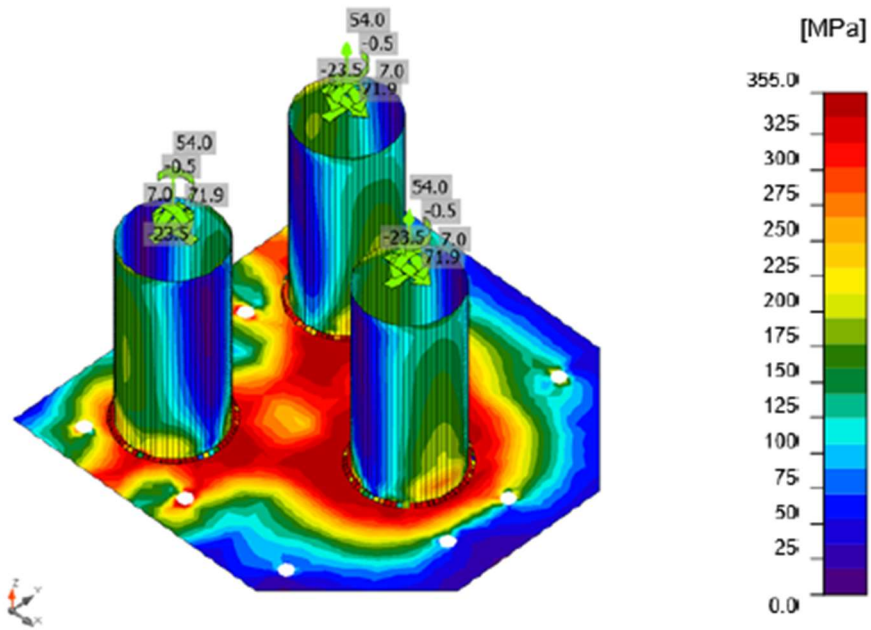

Equivalent stress, S18-3.

### Anchors

| Shape | Item | Loads      | $N_{Ed}$ [kN] | $V_{Ed}$ [kN] | $N_{Rd,c}$ [kN] | $N_{Rd,p}$ [kN] | $N_{Rd,cb}$ [kN] | $V_{Rd,cp}$ [kN] | $U_{t1}$ [%] | $U_{t2}$ [%] | $U_{t3}$ [%] | Status |
|-------|------|------------|---------------|---------------|-----------------|-----------------|------------------|------------------|--------------|--------------|--------------|--------|
|       | A9   | S18-3.     | 234.9         | 0.0           | 1305.6          | 893.4           | -                | 2060.6           | 69.0         | 0.0          | 53.6         | OK     |
|       | A10  | S18-3.     | 50.8          | 0.0           | 1305.6          | 893.4           | -                | 2060.6           | 66.0         | 0.0          | 53.6         | OK     |
|       | A11  | S18-3.     | 158.4         | 0.0           | 1305.6          | 893.4           | -                | 2060.6           | 66.0         | 0.0          | 53.6         | OK     |
|       | A12  | ULS-Set(2) | 1.5           | 0.0           | 1296.3          | 893.4           | -                | 2060.6           | 18.0         | 0.0          | 7.6          | OK     |
|       | A13  | ULS-Set(2) | 12.5          | 0.0           | 1296.3          | 893.4           | -                | 2060.6           | 18.0         | 0.0          | 7.6          | OK     |
|       | A14  | ULS-Set(2) | 56.3          | 0.0           | 1296.3          | 893.4           | -                | 2060.6           | 18.0         | 0.0          | 7.6          | OK     |
|       | A15  | S18-3.     | 236.1         | 0.0           | 1305.6          | 893.4           | -                | 2060.6           | 69.3         | 0.0          | 53.6         | OK     |
|       | A16  | S18-3.     | 24.6          | 0.0           | 1305.6          | 893.4           | -                | 2060.6           | 66.0         | 0.0          | 53.6         | OK     |
|       | A17  | S18-3.     | 156.4         | 0.0           | 1305.6          | 893.4           | -                | 2060.6           | 66.0         | 0.0          | 53.6         | OK     |
|       | A18  | ULS-Set(2) | 1.1           | 0.0           | 1296.3          | 893.4           | -                | 2060.6           | 18.0         | 0.0          | 7.6          | OK     |

### Design data

| Grade        | $N_{Rd,s}$ [kN] | $V_{Rd,s}$ [kN] |
|--------------|-----------------|-----------------|
| M30 10.9 - 1 | 340.6           | 187.0           |

**Symbol explanation**

|             |  |
|-------------|--|
| $N_{Ed}$    | Tension force  |
| $V_{Ed}$    | Resultant of shear forces $V_y, V_z$ in bolt   |
| $N_{Rd,c}$  | Design resistance in case of concrete cone failure under tension load - EN1992-4 - Cl. 7.2.1.4 |
| $N_{Rd,p}$  | Design resistance in case of pull-out failure - EN1992-4 - Cl. 7.2.1.5                         |
| $N_{Rd,cb}$ | Design resistance in case of concrete blow-out failure - EN1992-4 - Cl. 7.2.1.8                |
| $V_{Rd,cp}$ | Design resistance in case of concrete pryout failure - EN1992-4 - Cl. 7.2.2.4                  |
| $U_t$       | Utilization in tension   |
| $U_s$       | Utilization in shear   |
| $U_{ts}$    | Utilization in tension and shear   |
| $N_{Rd,s}$  | Design tensile resistance of a fastener in case of steel failure - EN1992-4 - Cl. 7.2.1.3      |
| $V_{Rd,s}$  | Design shear resistance in case of steel failure - EN1992-4 - Cl.7.2.2.3.1                     |

**Welds (Plastic redistribution)**

| Item | Edge   | Throat th. [mm] | Length [mm] | Loads  | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | $U_t$ [%] | $U_{tc}$ [%] | Status |
|------|--------|-----------------|-------------|--------|-----------------------|---------------------|------------------------|--------------------------|----------------------|-----------|--------------|--------|
| SP1  | B5640  | ▲8.7            | 649         | S18-3. | 428.3                 | 0.8                 | -280.3                 | -33.9                    | 193.4                | 98.3      | 76.6         | OK     |
| SP1  | M12480 | ▲8.7            | 649         | S18-3. | 427.9                 | 0.6                 | 256.0                  | 16.8                     | -197.2               | 98.2      | 71.9         | OK     |
| SP1  | M12481 | ▲8.7            | 649         | S18-1. | 428.6                 | 1.0                 | -248.7                 | 41.7                     | 197.2                | 98.4      | 71.9         | OK     |

**Design data**

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | $0.9 \sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

**Symbol explanation**

|                    |   |
|--------------------|---|
| $\epsilon_{pl}$    | Strain  |
| $\sigma_{w,Ed}$    | Equivalent stress   |
| $\sigma_{w,Rd}$    | Equivalent stress resistance                                    |
| $\sigma_{\perp}$   | Perpendicular stress  |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$       | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$          | Corelation factor EN 1993-1-8 tab. 4.1                          |
| $U_t$              | Utilization   |
| $U_{tc}$           | Weld capacity utilization                                       |

**Concrete block**

| Item | Loads  | $c$ [mm] | $A_{eff}$ [mm <sup>2</sup> ] | $\sigma$ [MPa] | $k_j$ [-] | $F_{jd}$ [MPa] | $U_t$ [%] | Status |
|------|--------|----------|------------------------------|----------------|-----------|----------------|-----------|--------|
| CB 1 | S18-1. | 34       | 59427                        | 25.6           | 3.00      | 40.2           | 63.7      | OK     |

**Symbol explanation**

|           |   |
|-----------|---|
| c         | Bearing width                                       |
| $A_{eff}$ | Effective area                                      |
| $\sigma$  | Average stress in concrete                          |
| $k_j$     | Concentration factor                                |
| $F_{jd}$  | The ultimate bearing strength of the concrete block |
| Ut        | Utilization   |

**Shear in contact plane**

| Name | Loads  | $V_y$<br>[kN] | $V_z$<br>[kN] | $V_{Rd,y}$<br>[kN] | $V_{Rd,z}$<br>[kN] | $V_{c,Rd}$<br>[kN] | Ut<br>[%] | Status |
|------|--------|---------------|---------------|--------------------|--------------------|--------------------|-----------|--------|
| SP1  | S18-3. | 40.0          | 37.4          | 213.1              | 213.1              | 0.0                | 25.7      | OK     |

**Symbol explanation**

|            |                                 |
|------------|---------------------------------|
| $V_y$      | Shear force in base plate $V_y$ |
| $V_z$      | Shear force in base plate $V_z$ |
| $V_{Rd,y}$ | Shear resistance                |
| $V_{Rd,z}$ | Shear resistance                |
| $V_{c,Rd}$ | Concrete bearing resistance     |
| Ut         | Utilization                     |

**Buckling**

Buckling analysis was not calculated.

**Code settings**

| Item                                    | Value                  | Unit | Reference                      |
|---|------------------------|------|--------------------------------|
| YM0                                     | 1.00                   | -    | EN 1993-1-1: 6.1               |
| YM1                                     | 1.00                   | -    | EN 1993-1-1: 6.1               |
| YM2                                     | 1.25                   | -    | EN 1993-1-1: 6.1               |
| YM3                                     | 1.25                   | -    | EN 1993-1-8: 2.2               |
| YC                                      | 1.50                   | -    | EN 1992-1-1: 2.4.2.4           |
| Yinst                                   | 1.20                   | -    | EN 1992-4: Table 4.1           |
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5             |
| Effective area - influence of mesh size | 0.10                   | -    |                                |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8                    |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7            |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5                    |
| Weld stress evaluation                  | Plastic redistribution |      |                                |
| Detailing                               | No                     |      |                                |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3           |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3           |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5 |
| Use calculated ab in bearing check.     | Yes                    |      | EN 1993-1-8: tab 3.4           |
| Cracked concrete                        | Yes                    |      | EN 1992-4                      |

| Item                            | Value | Unit | Reference  |
|---------------------------------|-------|------|--|
| Local deformation check         | No    |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit         | 0.03  | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA) | Yes   |      | Analysis with large deformations for hollow section joints |
| Braoed system                   | No    |      | EN 1993-1-8: 5.2.2.5                                       |


## 5.2. Spoj stupa „S2“ sa temeljem

### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5908                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

### Beams and columns

| Name  | Cross-section                     | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B5570 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | -75            | 0              | 200            | Position  |
| B5581 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 75             | 0              | 200            | Position  |
| B6084 | 2 - CHS(cf)355,6/8,0              | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |

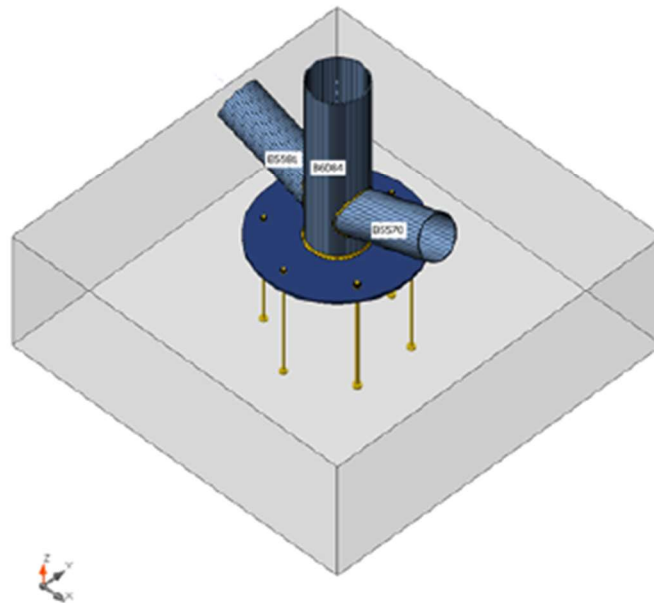

### Cross-sections

| Name                              | Material |
|-----------------------------------|----------|
| 1 - Massive O<br>Hollow(CHS273,8) | S 355    |
| 2 - CHS(cf)355,6/8,0              | S 355    |

**Anchors**

| Name     | Bolt assembly | Diameter [mm] | fu [MPa] | Gross area [mm <sup>2</sup> ] |
|----------|---------------|---------------|----------|-------------------------------|
| M20 10.9 | M20 10.9      | 20            | 1000.0   | 314                           |

**Load effects (forces in equilibrium)**

| Name        | Member | N [kN] | Vy [kN] | Vz [kN] | Mx [kNm] | My [kNm] | Mz [kNm] |
|-------------|--------|--------|---------|---------|----------|----------|----------|
| ULS-Set(2)  | B5570  | 332.3  | -1.8    | 2.1     | 2.7      | 20.6     | 11.5     |
|             | B5581  | -355.5 | 0.8     | -4.2    | 4.7      | 17.9     | 1.4      |
|             | B6084  | 68.3   | 7.4     | -34.1   | -8.7     | -98.0    | -48.7    |
| ULS-Set(3)  | B5570  | 262.0  | -2.1    | 1.1     | 2.1      | 16.1     | 11.7     |
|             | B5581  | -317.4 | -0.2    | -3.9    | 3.9      | 15.2     | -3.1     |
|             | B6084  | 54.0   | 9.2     | -27.3   | -5.8     | -79.1    | -51.4    |
| ULS-Set(5)  | B5570  | 318.3  | -1.5    | 2.3     | 1.6      | 22.7     | 9.7      |
|             | B5581  | -298.1 | 0.6     | -4.2    | 4.1      | 17.9     | -1.0     |
|             | B6084  | 43.6   | 1.5     | -31.9   | -5.5     | -96.5    | -35.2    |
| ULS-Set(6)  | B5570  | 294.9  | -1.4    | 2.8     | 1.3      | 22.7     | 9.0      |
|             | B5581  | -267.9 | 0.5     | -3.4    | 3.9      | 16.0     | -1.3     |
|             | B6084  | 33.5   | 0.6     | -30.2   | -4.9     | -91.9    | -31.8    |
| ULS-Set(16) | B5570  | 331.4  | -1.7    | 2.0     | 2.7      | 20.2     | 11.2     |
|             | B5581  | -336.4 | 0.8     | -4.2    | 4.6      | 17.7     | 0.9      |
|             | B6084  | 66.4   | 7.1     | -31.7   | -8.1     | -92.8    | -48.3    |
| ULS-Set(22) | B5570  | 308.9  | -1.7    | 2.6     | 2.5      | 20.6     | 10.8     |
|             | B5581  | -325.3 | 0.8     | -3.3    | 4.4      | 16.0     | 1.1      |
|             | B6084  | 58.2   | 6.5     | -32.5   | -8.0     | -93.4    | -45.2    |

**Foundation block**

| Item                 | Value       | Unit |
|----------------------|-------------|------|
| <b>CB 1</b>          |             |      |
| Dimensions           | 2400 x 2400 | mm   |
| Depth                | 800         | mm   |
| Anchor               | M20 10.9    |      |
| Anchoring length     | 700         | mm   |
| Shear force transfer | Anchors     |      |

## Check

### Summary

| Name           | Value          | Status |
|----------------|----------------|--------|
| Analysis       | 100.0%         | OK     |
| Plates         | 0.4 < 5.0%     | OK     |
| Anchors        | 93.4 < 100%    | OK     |
| Welds          | 98.1 < 100%    | OK     |
| Concrete block | 98.6 < 100%    | OK     |
| Buckling       | Not calculated |        |

### Plates

| Name   | Thickness [mm] | Loads      | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|--------|----------------|------------|---------------------|---------------------|----------------------|--------|
| B5570  | 8.0            | ULS-Set(2) | 342.3               | 0.0                 | 0.0                  | OK     |
| B5581  | 8.0            | ULS-Set(2) | 263.0               | 0.0                 | 0.0                  | OK     |
| B6084  | 8.0            | ULS-Set(2) | 355.7               | 0.4                 | 0.0                  | OK     |
| BP1    | 20.0           | ULS-Set(5) | 355.6               | 0.3                 | 0.0                  | OK     |
| STIFF1 | 12.0           | ULS-Set(2) | 215.0               | 0.0                 | 0.0                  | OK     |


### Design data

| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |


### Symbol explanation

|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |




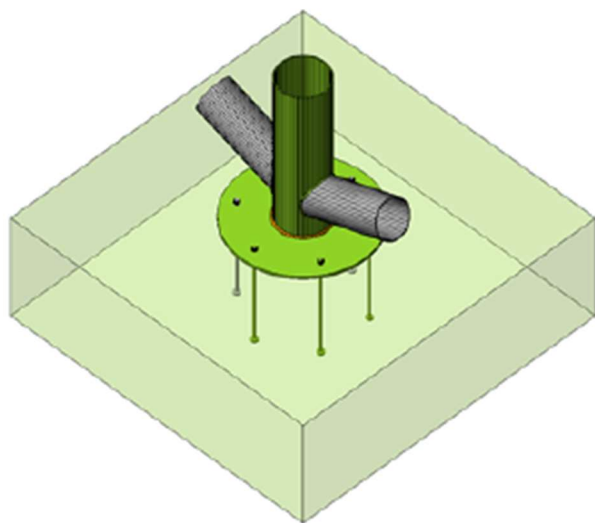


Overall check, ULS-Set(2)

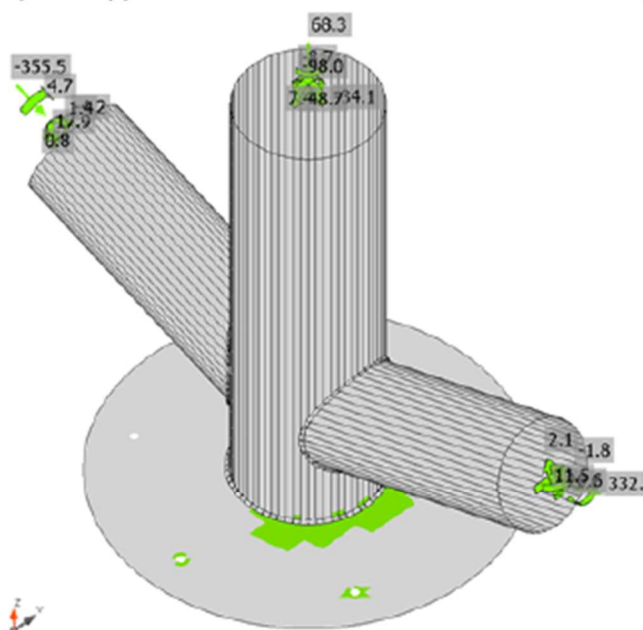

Strain check, ULS-Set(2)

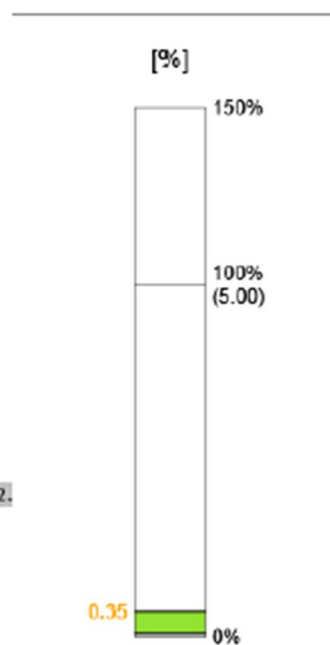



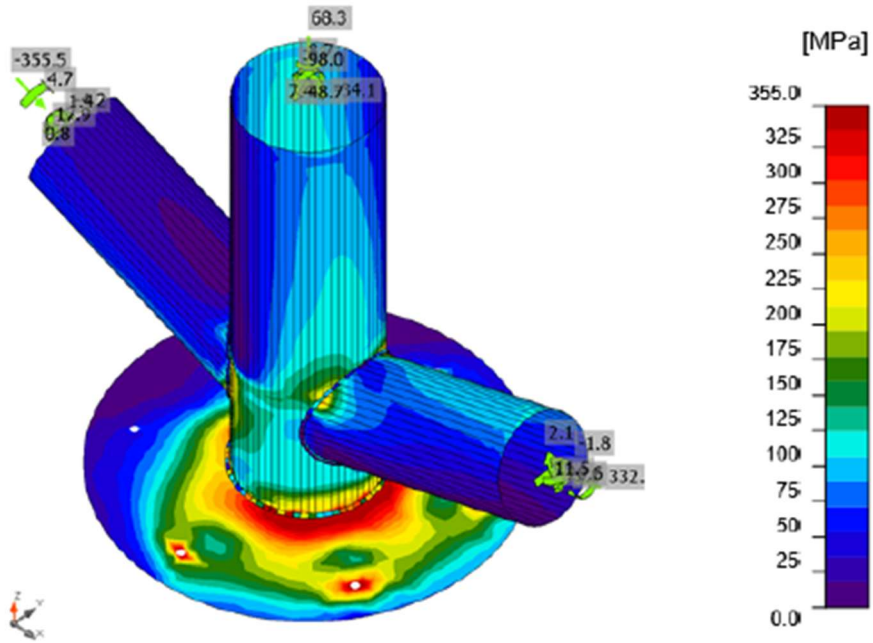

Equivalent stress, ULS-Set(2)

**Anchors**

| Shape | Item | Loads      | $N_{Ed}$ [kN] | $V_{Ed}$ [kN] | $N_{Rd,c}$ [kN] | $N_{Rd,p}$ [kN] | $N_{Rd,cb}$ [kN] | $V_{Rd,c}$ [kN] | $V_{Rd,cp}$ [kN] | $U_{tt}$ [%] | $U_{ts}$ [%] | $U_{ts}$ [%] | Status |
|-------|------|------------|---------------|---------------|-----------------|-----------------|------------------|-----------------|------------------|--------------|--------------|--------------|--------|
|       | A1   | ULS-Set(5) | 34.9          | 14.3          | 661.9           | 343.6           | -                | 417.7           | 2130.8           | 64.3         | 17.5         | 55.9         | OK     |
|       | A2   | ULS-Set(5) | 136.3         | 13.4          | 661.9           | 343.6           | -                | 237.2           | 2130.8           | 91.6         | 21.9         | 86.6         | OK     |
|       | A3   | ULS-Set(5) | 138.9         | 8.9           | 661.9           | 343.6           | -                | 237.2           | 2130.8           | 93.4         | 21.9         | 88.4         | OK     |
|       | A4   | ULS-Set(5) | 102.9         | 2.0           | 661.9           | 343.6           | -                | -               | 2130.8           | 69.2         | 2.5          | 52.0         | OK     |
|       | A5   | ULS-Set(5) | 3.3           | 7.1           | 661.9           | 343.6           | -                | -               | 2130.8           | 64.3         | 8.7          | 52.0         | OK     |
|       | A6   | ULS-Set(5) | 9.4           | 12.5          | 661.9           | 343.6           | -                | 417.7           | 2130.8           | 64.3         | 15.4         | 55.9         | OK     |

**Design data**

| Grade        | $N_{Rd,s}$ [kN] | $V_{Rd,s}$ [kN] |
|--------------|-----------------|-----------------|
| M20 10.9 - 1 | 148.8           | 81.7            |

**Symbol explanation**

|             |  |
|-------------|--|
| $N_{Ed}$    | Tension force  |
| $V_{Ed}$    | Resultant of shear forces $V_y$ , $V_z$ in bolt  |
| $N_{Rd,c}$  | Design resistance in case of concrete cone failure under tension load - EN1992-4 - Cl. 7.2.1.4 |
| $N_{Rd,p}$  | Design resistance in case of pull-out failure - EN1992-4 - Cl. 7.2.1.5                         |
| $N_{Rd,cb}$ | Design resistance in case of concrete blow-out failure - EN1992-4 - Cl. 7.2.1.8                |
| $V_{Rd,c}$  | Design resistance in case of concrete cone failure under shear load - EN1992-4 - Cl. 7.2.2.5   |
| $V_{Rd,cp}$ | Design resistance in case of concrete pryout failure - EN1992-4 - Cl. 7.2.2.4                  |
| $U_t$       | Utilization in tension   |
| $U_s$       | Utilization in shear   |
| $U_{ts}$    | Utilization in tension and shear   |
| $N_{Rd,s}$  | Design tensile resistance of a fastener in case of steel failure - EN1992-4 - Cl. 7.2.1.3      |
| $V_{Rd,s}$  | Design shear resistance in case of steel failure - EN1992-4 - Cl. 7.2.2.3.1                    |

## Welds (Plastic redistribution)

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6084-arc 9  | B5570  | ▲7.0▲           | 891         | ULS-Set(2) | 334.4                 | 0.0                 | -102.5                 | 19.8                     | -182.7               | 76.8   | 14.9                | OK     |
| B6084-arc 56 | B5581  | ▲7.0▲           | 889         | ULS-Set(2) | 190.0                 | 0.0                 | 43.8                   | 10.0                     | -106.3               | 43.6   | 13.3                | OK     |
| BP1          | B6084  | ▲10.0▲          | 1092        | ULS-Set(5) | 427.3                 | 0.3                 | -225.4                 | -23.1                    | 208.3                | 98.1   | 53.1                | OK     |
|              |        | ▲7.0▲           | 891         | ULS-Set(2) | 192.0                 | 0.0                 | -118.3                 | -16.6                    | 85.7                 | 44.1   | 10.7                | OK     |
|              |        | ▲7.0▲           | 889         | ULS-Set(2) | 144.9                 | 0.0                 | -70.6                  | 0.0                      | 73.1                 | 33.3   | 13.3                | OK     |
| B6084-arc 1  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 88.7                  | 0.0                 | 45.9                   | -21.6                    | 38.1                 | 20.4   | 20.4                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 63.1                  | 0.0                 | 7.6                    | 33.1                     | -14.6                | 14.5   | 14.5                | OK     |
| B6084-arc 2  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 77.0                  | 0.0                 | 41.2                   | -7.3                     | 36.8                 | 17.7   | 17.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 54.5                  | 0.0                 | 11.6                   | 26.7                     | -15.3                | 12.5   | 12.5                | OK     |
| B6084-arc 3  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 67.9                  | 0.0                 | 37.3                   | 7.1                      | 32.0                 | 15.6   | 15.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 47.7                  | 0.0                 | 12.4                   | 20.6                     | -16.8                | 10.9   | 10.9                | OK     |
| B6084-arc 4  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 70.6                  | 0.0                 | 31.5                   | 24.1                     | 27.4                 | 16.2   | 16.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 32.4                  | 0.0                 | 12.9                   | 1.4                      | -17.1                | 7.4    | 7.4                 | OK     |
| B6084-arc 5  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 72.1                  | 0.0                 | 12.7                   | 39.1                     | 12.3                 | 16.6   | 16.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 61.2                  | 0.0                 | 30.1                   | -3.3                     | -30.6                | 14.0   | 14.0                | OK     |
| B6084-arc 6  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 92.1                  | 0.0                 | 7.1                    | 52.5                     | 7.0                  | 21.1   | 21.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 58.1                  | 0.0                 | 23.8                   | -19.2                    | -23.8                | 13.3   | 13.3                | OK     |
| B6084-arc 7  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 118.6                 | 0.0                 | -25.5                  | 66.0                     | -11.1                | 27.2   | 27.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 92.1                  | 0.0                 | 42.4                   | -38.0                    | -28.0                | 21.2   | 21.2                | OK     |
| B6084-arc 8  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 175.6                 | 0.0                 | -75.4                  | 78.5                     | -47.0                | 40.3   | 40.3                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 144.4                 | 0.0                 | 32.9                   | -81.1                    | -4.5                 | 33.2   | 33.2                | OK     |
| B6084-arc 9  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 426.9                 | 0.0                 | -187.0                 | 164.9                    | -147.9               | 98.0   | 98.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 426.4                 | 0.0                 | -75.5                  | -210.7                   | 119.6                | 97.9   | 97.9                | OK     |
| B6084-arc 10 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 417.5                 | 0.0                 | -205.3                 | 23.0                     | -208.6               | 95.9   | 95.9                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 411.7                 | 0.0                 | -195.9                 | -81.5                    | 192.5                | 94.5   | 94.5                | OK     |
| B6084-arc 11 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 199.3                 | 0.0                 | -64.9                  | -46.9                    | -98.2                | 45.8   | 45.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 266.0                 | 0.0                 | -157.2                 | 1.4                      | 123.9                | 61.1   | 61.1                | OK     |
| B6084-arc 12 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 28.1                  | 0.0                 | -0.5                   | -4.0                     | -15.7                | 6.5    | 6.5                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 122.8                 | 0.0                 | -70.9                  | -17.1                    | 55.3                 | 28.2   | 28.2                | OK     |
| B6084-arc 13 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 11.2                  | 0.0                 | 0.3                    | -3.3                     | -5.5                 | 2.6    | 2.6                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 80.6                  | 0.0                 | -44.6                  | 1.4                      | 38.7                 | 18.5   | 18.5                | OK     |
| B6084-arc 14 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 24.4                  | 0.0                 | -9.5                   | -5.8                     | -11.6                | 5.6    | 5.6                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 52.2                  | 0.0                 | -27.7                  | 3.4                      | 25.3                 | 12.0   | 12.0                | OK     |
| B6084-arc 15 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 5.7                   | 0.0                 | -1.1                   | 3.2                      | -0.6                 | 1.3    | 1.3                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 55.2                  | 0.0                 | -27.2                  | 1.8                      | 27.7                 | 12.7   | 12.7                | OK     |
| B6084-arc 16 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 14.7                  | 0.0                 | -6.0                   | -5.9                     | -5.1                 | 3.4    | 3.4                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 42.1                  | 0.0                 | -19.8                  | 5.4                      | 20.7                 | 9.7    | 9.7                 | OK     |
| B6084-arc 17 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 16.1                  | 0.0                 | -6.2                   | -7.3                     | -4.5                 | 3.7    | 3.7                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 47.6                  | 0.0                 | -21.7                  | 7.3                      | 23.3                 | 10.9   | 10.9                | OK     |

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6084-arc 18 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 17.9                  | 0.0                 | -5.6                   | -8.8                     | -4.3                 | 4.1    | 4.1                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 48.9                  | 0.0                 | -22.8                  | 6.6                      | 24.0                 | 11.2   | 11.2                | OK     |
| B6084-arc 19 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 20.5                  | 0.0                 | -4.6                   | -7.2                     | -9.0                 | 4.7    | 4.7                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 50.8                  | 0.0                 | -27.6                  | 8.4                      | 23.1                 | 11.7   | 11.7                | OK     |
| B6084-arc 20 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 20.8                  | 0.0                 | -2.4                   | -10.5                    | -5.8                 | 4.8    | 4.8                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 70.6                  | 0.0                 | -36.1                  | 12.4                     | 32.7                 | 16.2   | 16.2                | OK     |
| B6084-arc 21 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 25.9                  | 0.0                 | 0.7                    | -5.0                     | -14.1                | 6.0    | 6.0                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 106.7                 | 0.0                 | -58.9                  | 26.3                     | 44.1                 | 24.5   | 24.5                | OK     |
| B6084-arc 22 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 152.8                 | 0.0                 | -63.5                  | 19.8                     | -77.8                | 35.1   | 35.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 203.6                 | 0.0                 | -112.0                 | 15.0                     | 97.0                 | 46.8   | 46.8                | OK     |
| B6084-arc 23 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 288.1                 | 0.0                 | -140.3                 | -44.0                    | -138.5               | 66.2   | 66.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 296.9                 | 0.0                 | -134.1                 | 72.8                     | 134.5                | 68.2   | 68.2                | OK     |
| B6084-arc 24 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 282.6                 | 0.0                 | -111.0                 | -116.4                   | -94.7                | 64.9   | 64.9                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 270.4                 | 0.0                 | -52.7                  | 136.7                    | 69.0                 | 62.1   | 62.1                | OK     |
| B6084-arc 25 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 112.2                 | 0.0                 | -41.4                  | -55.7                    | -22.8                | 25.7   | 25.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 104.1                 | 0.0                 | 17.0                   | 59.3                     | 1.6                  | 23.9   | 23.9                | OK     |
| B6084-arc 26 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 77.6                  | 0.0                 | -14.1                  | -43.6                    | -6.0                 | 17.8   | 17.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 64.6                  | 0.0                 | 22.0                   | 32.2                     | -13.9                | 14.8   | 14.8                | OK     |
| B6084-arc 27 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 54.5                  | 0.0                 | -3.8                   | -31.4                    | -1.9                 | 12.5   | 12.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 48.8                  | 0.0                 | 19.2                   | 19.3                     | -17.2                | 11.2   | 11.2                | OK     |
| B6084-arc 28 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 47.0                  | 0.0                 | 5.5                    | -26.4                    | 5.3                  | 10.8   | 10.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 36.7                  | 0.0                 | 16.4                   | 9.2                      | -16.6                | 8.4    | 8.4                 | OK     |
| B6084-arc 29 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 36.9                  | 0.0                 | 9.2                    | -17.9                    | 10.3                 | 8.5    | 8.5                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 23.1                  | 0.0                 | 11.8                   | -4.2                     | -10.6                | 5.3    | 5.3                 | OK     |
| B6084-arc 30 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 33.2                  | 0.0                 | 14.9                   | -8.9                     | 14.6                 | 7.6    | 7.6                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(6) | 29.3                  | 0.0                 | 9.0                    | -13.2                    | -9.3                 | 6.7    | 6.7                 | OK     |
| B6084-arc 31 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 35.9                  | 0.0                 | 20.3                   | 0.8                      | 17.1                 | 8.2    | 8.2                 | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 38.7                  | 0.0                 | 6.2                    | -20.1                    | -9.2                 | 8.9    | 8.9                 | OK     |
| B6084-arc 32 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 48.5                  | 0.0                 | 21.8                   | 16.4                     | 18.8                 | 11.1   | 11.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 50.8                  | 0.0                 | 4.5                    | -28.2                    | -7.5                 | 11.7   | 11.7                | OK     |
| B6084-arc 33 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 68.9                  | 0.0                 | 28.2                   | 27.8                     | 23.4                 | 15.8   | 15.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 61.9                  | 0.0                 | -0.1                   | -35.5                    | -4.6                 | 14.2   | 14.2                | OK     |
| B6084-arc 34 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 81.9                  | 0.0                 | 25.9                   | 39.8                     | 20.8                 | 18.8   | 18.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 70.9                  | 0.0                 | 0.5                    | -40.6                    | -5.6                 | 16.3   | 16.3                | OK     |
| B6084-arc 35 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 104.1                 | 0.0                 | 35.0                   | 48.9                     | 28.5                 | 23.9   | 23.9                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 82.4                  | 0.0                 | -5.3                   | -47.5                    | -0.3                 | 18.9   | 18.9                | OK     |
| B6084-arc 36 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 116.2                 | 0.0                 | 28.3                   | 61.3                     | 21.9                 | 26.7   | 26.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 85.9                  | 0.0                 | -0.8                   | -49.3                    | -4.9                 | 19.7   | 19.7                | OK     |
| B6084-arc 37 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 129.2                 | 0.0                 | 16.5                   | 72.9                     | 12.8                 | 29.7   | 29.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 87.7                  | 0.0                 | -0.7                   | -50.6                    | -2.6                 | 20.1   | 20.1                | OK     |
| B6084-arc 38 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 139.8                 | 0.0                 | 13.1                   | 79.7                     | 10.1                 | 32.1   | 32.1                | OK     |



| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
|              |        | 44.0            | 17          | ULS-Set(5) | 91.4                  | 0.0                 | -2.4                   | -52.8                    | -0.3                 | 21.0   | 21.0                | OK     |
| B6084-arc 39 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 140.6                 | 0.0                 | -10.4                  | 80.6                     | -7.0                 | 32.3   | 32.3                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 97.8                  | 0.0                 | 7.9                    | -56.1                    | -4.5                 | 22.5   | 22.5                | OK     |
| B6084-arc 40 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 148.5                 | 0.0                 | -26.8                  | 82.1                     | -19.2                | 34.1   | 34.1                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 112.0                 | 0.0                 | 4.0                    | -64.5                    | 3.7                  | 25.7   | 25.7                | OK     |
| B6084-arc 41 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 214.3                 | 0.0                 | -70.9                  | 102.0                    | -56.9                | 49.2   | 49.2                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 179.9                 | 0.0                 | -23.4                  | -95.9                    | 37.6                 | 41.3   | 41.3                | OK     |
| B6084-arc 42 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 184.5                 | 0.0                 | -81.6                  | 55.7                     | -77.6                | 42.4   | 42.4                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 153.3                 | 0.0                 | -57.9                  | -53.7                    | 62.0                 | 35.2   | 35.2                | OK     |
| B6084-arc 43 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 96.1                  | 0.0                 | -41.8                  | 17.9                     | -46.6                | 22.1   | 22.1                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 89.7                  | 0.0                 | -43.9                  | -22.7                    | 39.0                 | 20.6   | 20.6                | OK     |
| B6084-arc 44 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 67.4                  | 0.0                 | -13.4                  | 35.3                     | -14.4                | 15.5   | 15.5                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 60.7                  | 0.0                 | -13.5                  | -32.6                    | 10.1                 | 13.9   | 13.9                | OK     |
| B6084-arc 45 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 57.1                  | 0.0                 | -12.7                  | 29.6                     | -12.6                | 13.1   | 13.1                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 43.4                  | 0.0                 | -6.6                   | -24.1                    | 5.8                  | 10.0   | 10.0                | OK     |
| B6084-arc 46 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 52.9                  | 0.0                 | -17.0                  | 24.4                     | -15.6                | 12.2   | 12.2                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 34.5                  | 0.0                 | -5.0                   | -18.9                    | 5.6                  | 7.9    | 7.9                 | OK     |
| B6084-arc 47 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 47.4                  | 0.0                 | -17.1                  | 19.4                     | -16.6                | 10.9   | 10.9                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 30.2                  | 0.0                 | -3.8                   | -16.8                    | 4.0                  | 6.9    | 6.9                 | OK     |
| B6084-arc 48 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 39.0                  | 0.0                 | -18.1                  | 10.9                     | -16.6                | 8.9    | 8.9                 | OK     |
|              |        | 44.0            | 17          | ULS-Set(3) | 18.9                  | 0.0                 | -2.4                   | -10.4                    | 3.1                  | 4.3    | 4.3                 | OK     |
| B6084-arc 49 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 37.3                  | 0.0                 | -20.2                  | 2.6                      | -17.9                | 8.6    | 8.6                 | OK     |
|              |        | 44.0            | 17          | ULS-Set(3) | 13.0                  | 0.0                 | -2.9                   | -5.8                     | 4.5                  | 3.0    | 3.0                 | OK     |
| B6084-arc 50 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 37.0                  | 0.0                 | -18.8                  | -5.7                     | -17.5                | 8.5    | 8.5                 | OK     |
|              |        | 44.0            | 17          | ULS-Set(5) | 9.2                   | 0.0                 | -0.6                   | 4.9                      | 1.9                  | 2.1    | 2.1                 | OK     |
| B6084-arc 51 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 41.6                  | 0.0                 | -17.9                  | -14.5                    | -16.1                | 9.5    | 9.5                 | OK     |
|              |        | 44.0            | 17          | ULS-Set(5) | 20.6                  | 0.0                 | -1.8                   | 11.2                     | 3.7                  | 4.7    | 4.7                 | OK     |
| B6084-arc 52 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 50.8                  | 0.0                 | -16.2                  | -22.9                    | -15.8                | 11.7   | 11.7                | OK     |
|              |        | 44.0            | 17          | ULS-Set(5) | 33.7                  | 0.0                 | -3.2                   | 19.1                     | 3.5                  | 7.7    | 7.7                 | OK     |
| B6084-arc 53 | STIFF1 | 44.0            | 17          | ULS-Set(5) | 60.8                  | 0.0                 | -14.2                  | -30.0                    | -16.2                | 14.0   | 14.0                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 50.4                  | 0.0                 | -8.5                   | 28.1                     | 5.8                  | 11.6   | 11.6                | OK     |
| B6084-arc 54 | STIFF1 | 44.0            | 17          | ULS-Set(3) | 93.5                  | 0.0                 | -43.2                  | -4.1                     | -47.7                | 21.5   | 21.5                | OK     |
|              |        | 44.0            | 17          | ULS-Set(3) | 90.6                  | 0.0                 | -48.1                  | 8.9                      | 43.4                 | 20.8   | 20.8                | OK     |
| B6084-arc 55 | STIFF1 | 44.0            | 17          | ULS-Set(3) | 190.3                 | 0.0                 | -85.8                  | -48.6                    | -85.2                | 43.7   | 43.7                | OK     |
|              |        | 44.0            | 17          | ULS-Set(3) | 159.8                 | 0.0                 | -67.0                  | 49.4                     | 67.6                 | 36.7   | 36.7                | OK     |
| B6084-arc 56 | STIFF1 | 44.0            | 17          | ULS-Set(3) | 196.1                 | 0.0                 | -72.4                  | -86.3                    | -60.2                | 45.0   | 45.0                | OK     |
|              |        | 44.0            | 17          | ULS-Set(3) | 168.6                 | 0.0                 | -23.5                  | 89.5                     | 35.8                 | 38.7   | 38.7                | OK     |
| B6084-arc 57 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 149.9                 | 0.0                 | -29.0                  | -82.9                    | -18.2                | 34.4   | 34.4                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 116.1                 | 0.0                 | 10.9                   | 66.7                     | 0.0                  | 26.7   | 26.7                | OK     |
| B6084-arc 58 | STIFF1 | 44.0            | 17          | ULS-Set(2) | 150.5                 | 0.0                 | -7.3                   | -86.7                    | -2.5                 | 34.5   | 34.5                | OK     |
|              |        | 44.0            | 17          | ULS-Set(2) | 103.5                 | 0.0                 | 11.1                   | 59.1                     | -6.2                 | 23.8   | 23.8                | OK     |

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6084-arc 59 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 143.2                 | 0.0                 | 8.1                    | -82.1                    | 8.3                  | 32.9   | 32.9                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 101.1                 | 0.0                 | 7.8                    | 57.7                     | -8.1                 | 23.2   | 23.2                | OK     |
| B6084-arc 60 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 149.1                 | 0.0                 | 21.3                   | -83.5                    | 16.9                 | 34.2   | 34.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 99.9                  | 0.0                 | 7.8                    | 56.2                     | -12.4                | 22.9   | 22.9                | OK     |
| B6084-arc 61 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 141.6                 | 0.0                 | 30.0                   | -75.6                    | 25.8                 | 32.5   | 32.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 96.7                  | 0.0                 | 4.1                    | 55.1                     | -8.5                 | 22.2   | 22.2                | OK     |
| B6084-arc 62 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 129.1                 | 0.0                 | 37.5                   | -63.4                    | 32.7                 | 29.6   | 29.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 89.6                  | 0.0                 | 2.9                    | 51.1                     | -7.6                 | 20.6   | 20.6                | OK     |
| B6084-arc 63 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 118.1                 | 0.0                 | 44.5                   | -51.3                    | 36.8                 | 27.1   | 27.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 82.9                  | 0.0                 | 3.5                    | 46.6                     | -10.8                | 19.0   | 19.0                | OK     |
| B6084-arc 64 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 100.4                 | 0.0                 | 44.1                   | -36.9                    | 36.7                 | 23.1   | 23.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 73.3                  | 0.0                 | 5.8                    | 40.2                     | -12.7                | 16.8   | 16.8                | OK     |

## Design data

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | 0.9 $\sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

## Symbol explanation

|                    |  |
|--------------------|--|
| $\epsilon_{pl}$    | Strain                                       |
| $\sigma_{w,Ed}$    | Equivalent stress                            |
| $\sigma_{w,Rd}$    | Equivalent stress resistance                 |
| $\sigma_{\perp}$   | Perpendicular stress                         |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis           |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis      |
| 0.9 $\sigma$       | Perpendicular stress resistance - 0.9*fu/γM2 |
| $\beta_w$          | Corelation factor EN 1993-1-8 tab. 4.1       |
| Ut                 | Utilization                                  |
| Ut <sub>c</sub>    | Weld capacity utilization                    |

## Concrete block

| Item | Loads      | c [mm] | A <sub>eff</sub> [mm <sup>2</sup> ] | $\sigma$ [MPa] | k <sub>j</sub> [-] | F <sub>jd</sub> [MPa] | Ut [%] | Status |
|------|------------|--------|-------------------------------------|----------------|--------------------|-----------------------|--------|--------|
| CB 1 | ULS-Set(5) | 27     | 13963                               | 66.0           | 3.00               | 67.0                  | 98.6   | OK     |

## Symbol explanation

|                  |   |
|------------------|---|
| c                | Bearing width                                       |
| A <sub>eff</sub> | Effective area                                      |
| $\sigma$         | Average stress in concrete                          |
| k <sub>j</sub>   | Concentration factor                                |
| F <sub>jd</sub>  | The ultimate bearing strength of the concrete block |
| Ut               | Utilization   |

**Buckling**

Buckling analysis was not calculated.

**Code settings**

| Item                                    | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| YM0                                     | 1.00                   | -    | EN 1993-1-1: 6.1   |
| YM1                                     | 1.00                   | -    | EN 1993-1-1: 6.1   |
| YM2                                     | 1.25                   | -    | EN 1993-1-1: 6.1   |
| YM3                                     | 1.25                   | -    | EN 1993-1-8: 2.2   |
| YC                                      | 1.50                   | -    | EN 1992-1-1: 2.4.2.4                                       |
| YInst                                   | 1.20                   | -    | EN 1992-4: Table 4.1                                       |
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size | 0.10                   | -    |  |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                  | Plastic redistribution |      |  |
| Detailing                               | No                     |      |  |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated $a_b$ in bearing check.  | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                        | Yes                    |      | EN 1992-4  |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)         | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                           | No                     |      | EN 1993-1-8: 5.2.2.5                                       |


### 5.3. Spoj kosog dijela stupa „S1“

#### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5748                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

#### Beams and columns

| Name  | Cross-section         | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B5633 | 1 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 135            | 0              | 0              | Position  |
| B5699 | 2 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 100            | 0              | 125            | Position  |
| B6109 | 2 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B6110 | 2 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |

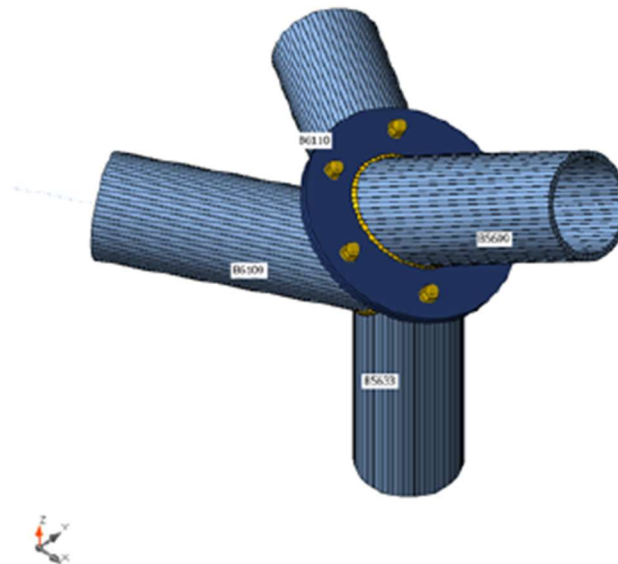

#### Cross-sections

| Name                  | Material |
|-----------------------|----------|
| 1 - CHS(cf)219.1/12.5 | S 355    |
| 2 - CHS(cf)219.1/12.5 | S 355    |

#### Bolts

| Name    | Bolt assembly | Diameter [mm] | $f_u$ [MPa] | Gross area [mm <sup>2</sup> ] |
|---------|---------------|---------------|-------------|-------------------------------|
| M20 8.8 | M20 8.8       | 20            | 800.0       | 314                           |



## Load effects (forces in equilibrium)

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(2)  | B5633  | 172.9     | -1.1       | -1.5       | -2.2        | -7.5        | 6.2         |
|             | B5699  | -136.9    | -0.5       | -3.0       | 7.7         | 10.6        | -8.1        |
|             | B6109  | -92.2     | -11.2      | -27.9      | -4.0        | 1.8         | 3.3         |
|             | B6110  | 48.8      | -9.8       | -71.5      | -3.3        | -8.1        | 1.8         |
| ULS-Set(3)  | B5633  | -33.6     | 2.3        | -12.2      | -0.7        | -47.0       | -9.7        |
|             | B5699  | -119.1    | 3.2        | -4.8       | 6.5         | 24.0        | 8.2         |
|             | B6109  | -52.1     | -22.3      | 53.3       | 4.0         | -17.5       | -4.1        |
|             | B6110  | 61.2      | -2.5       | 46.2       | -0.1        | 11.4        | -5.5        |
| ULS-Set(6)  | B5633  | 21.9      | 2.0        | -13.0      | -1.6        | -50.7       | -8.0        |
|             | B5699  | -165.5    | 3.2        | -5.3       | 9.3         | 27.1        | 6.1         |
|             | B6109  | -83.0     | -27.0      | 44.7       | 2.7         | -17.8       | -3.2        |
|             | B6110  | 78.9      | -6.0       | 23.7       | -1.5        | 9.5         | -5.2        |
| ULS-Set(8)  | B5633  | 149.4     | -0.1       | -5.7       | -2.4        | -23.3       | 2.1         |
|             | B5699  | -167.2    | 0.6        | -3.7       | 9.4         | 17.1        | -4.8        |
|             | B6109  | -103.8    | -18.4      | -7.2       | -2.5        | -5.3        | 1.8         |
|             | B6110  | 66.3      | -10.7      | -52.5      | -3.5        | -3.4        | -0.1        |
| ULS-Set(9)  | B5633  | -25.3     | 2.3        | -12.9      | -0.8        | -49.7       | -9.5        |
|             | B5699  | -134.0    | 3.4        | -5.8       | 7.2         | 26.6        | 8.3         |
|             | B6109  | -60.0     | -23.9      | 53.6       | 4.0         | -17.5       | -4.2        |
|             | B6110  | 67.4      | -2.6       | 46.1       | 0.0         | 11.6        | -5.8        |
| ULS-Set(10) | B5633  | -31.8     | -0.1       | -12.8      | -0.8        | -49.2       | -1.1        |
|             | B5699  | -138.7    | 4.0        | -5.3       | 7.1         | 25.0        | 10.2        |
|             | B6109  | -63.2     | -24.6      | 33.1       | 3.3         | -10.8       | -5.0        |
|             | B6110  | 68.9      | -1.3       | 75.1       | 1.1         | 20.0        | -6.6        |
| ULS-Set(11) | B5633  | -40.1     | -0.1       | -12.2      | -0.7        | -46.5       | -1.3        |
|             | B5699  | -123.8    | 3.9        | -4.3       | 6.4         | 22.4        | 10.1        |
|             | B6109  | -55.3     | -22.9      | 32.8       | 3.2         | -10.8       | -4.8        |
|             | B6110  | 62.6      | -1.2       | 75.2       | 1.0         | 19.8        | -6.3        |
| ULS-Set(12) | B5633  | 115.8     | -2.6       | 7.5        | -0.2        | 28.5        | 11.1        |
|             | B5699  | 2.4       | -2.6       | -1.4       | -0.7        | -6.6        | -10.0       |
|             | B6109  | -14.7     | 10.5       | -52.5      | -4.4        | 16.3        | 4.5         |
|             | B6110  | -15.1     | -1.3       | -63.4      | -0.3        | -12.7       | 4.6         |
| ULS-Set(13) | B5633  | 124.2     | -2.6       | 6.8        | -0.3        | 25.8        | 11.3        |
|             | B5699  | -12.5     | -2.4       | -2.4       | 0.1         | -4.0        | -9.9        |
|             | B6109  | -22.6     | 8.9        | -52.2      | -4.3        | 16.3        | 4.4         |
|             | B6110  | -8.8      | -1.4       | -63.5      | -0.2        | -12.5       | 4.3         |
| ULS-Set(15) | B5633  | 14.8      | 2.1        | -12.2      | -1.5        | -47.7       | -8.2        |
|             | B5699  | -151.3    | 3.0        | -4.6       | 8.5         | 25.2        | 5.6         |
|             | B6109  | -75.6     | -24.8      | 45.1       | 2.6         | -17.5       | -3.0        |
|             | B6110  | 72.3      | -5.7       | 22.4       | -1.4        | 8.7         | -4.7        |
| ULS-Set(16) | B5633  | 36.3      | 1.8        | -11.1      | -1.5        | -42.7       | -6.6        |

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B5699  | -151.1    | 2.2        | -4.7       | 8.2         | 24.0        | 3.0         |
|             | B6109  | -79.4     | -22.6      | 37.6       | 1.8         | -15.1       | -1.8        |
|             | B6110  | 68.6      | -6.6       | 8.4        | -1.5        | 5.9         | -3.5        |
| ULS-Set(17) | B5633  | 164.6     | -1.1       | -0.9       | -2.1        | -4.8        | 6.0         |
|             | B5699  | -122.0    | -0.7       | -2.0       | 7.0         | 8.1         | -8.2        |
|             | B6109  | -84.3     | -9.5       | -28.2      | -4.1        | 1.8         | 3.5         |
|             | B6110  | 42.6      | -9.7       | -71.5      | -3.3        | -8.2        | 2.1         |
| ULS-Set(18) | B5633  | -0.8      | -2.4       | -10.7      | -1.1        | -41.5       | 7.4         |
|             | B5699  | -142.4    | 3.8        | -4.4       | 7.2         | 20.9        | 8.6         |
|             | B6109  | -71.1     | -22.9      | 4.6        | 1.3         | -3.0        | -4.2        |
|             | B6110  | 66.9      | -1.7       | 73.7       | 1.3         | 22.2        | -5.8        |
| ULS-Set(20) | B5633  | 150.7     | -0.1       | -5.6       | -2.4        | -23.0       | 2.1         |
|             | B5699  | -167.9    | 0.5        | -4.0       | 9.4         | 17.7        | -5.2        |
|             | B6109  | -104.3    | -17.9      | -6.5       | -2.5        | -5.0        | 1.9         |
|             | B6110  | 65.9      | -10.5      | -53.8      | -3.3        | -4.1        | 0.1         |
| ULS-Set(21) | B5633  | 122.7     | -2.2       | -6.7       | -2.4        | -27.5       | 9.0         |
|             | B5699  | -172.7    | 1.9        | -3.4       | 9.7         | 17.3        | -0.8        |
|             | B6109  | -103.7    | -20.8      | -19.5      | -2.4        | -0.7        | 0.0         |
|             | B6110  | 71.0      | -8.3       | -10.8      | -2.0        | 7.1         | -1.9        |
| ULS-Set(22) | B5633  | 15.4      | -0.4       | -12.9      | -1.6        | -50.2       | 0.5         |
|             | B5699  | -170.2    | 3.9        | -4.8       | 9.2         | 25.5        | 7.9         |
|             | B6109  | -86.2     | -27.6      | 24.2       | 1.9         | -11.1       | -4.0        |
|             | B6110  | 80.4      | -4.7       | 52.7       | -0.3        | 17.9        | -6.0        |
| ULS-Set(25) | B5633  | 23.2      | 2.1        | -12.9      | -1.6        | -50.4       | -8.0        |
|             | B5699  | -166.2    | 3.1        | -5.6       | 9.3         | 27.8        | 5.7         |
|             | B6109  | -83.5     | -26.4      | 45.4       | 2.7         | -17.5       | -3.1        |
|             | B6110  | 78.5      | -5.8       | 22.4       | -1.3        | 8.9         | -5.0        |
| ULS-Set(29) | B5633  | 144.9     | -3.2       | -2.6       | -2.2        | -12.0       | 13.1        |
|             | B5699  | -141.7    | 0.8        | -2.4       | 8.0         | 10.2        | -3.8        |
|             | B6109  | -91.6     | -14.1      | -40.9      | -3.9        | 6.1         | 1.4         |
|             | B6110  | 53.9      | -7.6       | -28.5      | -1.9        | 3.1         | -0.1        |
| ULS-Set(30) | B5633  | 105.2     | -4.2       | -4.6       | -1.9        | -19.1       | 15.9        |
|             | B5699  | -144.3    | 1.9        | -2.6       | 7.8         | 12.1        | 0.2         |
|             | B6109  | -88.1     | -16.6      | -39.8      | -3.0        | 7.2         | -0.3        |
|             | B6110  | 57.9      | -5.5       | 11.5       | -0.6        | 12.1        | -2.0        |
| ULS-Set(32) | B5633  | -3.8      | 2.0        | -11.8      | -0.8        | -44.8       | -8.0        |
|             | B5699  | -133.8    | 2.7        | -5.9       | 6.8         | 25.4        | 5.8         |
|             | B6109  | -63.9     | -21.7      | 46.1       | 3.2         | -15.1       | -3.0        |
|             | B6110  | 63.8      | -3.6       | 32.2       | -0.2        | 8.8         | -4.6        |
| ULS-Set(33) | B5633  | 127.9     | 0.2        | -6.8       | -2.4        | -28.3       | 0.5         |
|             | B5699  | -167.4    | 1.3        | -3.6       | 9.8         | 18.3        | -2.2        |
|             | B6109  | -100.0    | -20.6      | 0.3        | -1.6        | -7.7        | 0.6         |
|             | B6110  | 69.9      | -9.8       | -38.5      | -3.3        | -0.6        | -1.3        |

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(36) | B5633  | 7.1       | -0.3       | -12.2      | -1.5        | -47.5       | 0.3         |
|             | B5699  | -155.3    | 3.7        | -3.8       | 8.5         | 23.0        | 7.8         |
|             | B6109  | -78.3     | -26.0      | 23.9       | 1.8         | -11.1       | -3.9        |
|             | B6110  | 74.2      | -4.6       | 52.8       | -0.4        | 17.7        | -5.7        |
| ULS-Set(37) | B5633  | 113.1     | -2.2       | -6.1       | -2.3        | -25.1       | 8.7         |
|             | B5699  | -157.2    | 1.8        | -2.1       | 9.0         | 14.1        | -0.5        |
|             | B6109  | -95.3     | -19.7      | -20.5      | -2.5        | -1.0        | 0.0         |
|             | B6110  | 65.2      | -8.3       | -9.4       | -2.2        | 7.6         | -1.8        |
| ULS-Set(38) | B5633  | 121.4     | -2.2       | -6.7       | -2.4        | -27.8       | 8.9         |
|             | B5699  | -172.1    | 2.0        | -3.1       | 9.7         | 16.7        | -0.4        |
|             | B6109  | -103.2    | -21.3      | -20.2      | -2.4        | -1.0        | -0.2        |
|             | B6110  | 71.4      | -8.5       | -9.5       | -2.1        | 7.8         | -2.1        |
| ULS-Set(46) | B5633  | 16.7      | -0.4       | -12.8      | -1.6        | -49.9       | 0.5         |
|             | B5699  | -170.9    | 3.8        | -5.1       | 9.2         | 26.1        | 7.5         |
|             | B6109  | -86.7     | -27.1      | 24.9       | 1.9         | -10.8       | -3.8        |
|             | B6110  | 80.0      | -4.5       | 51.3       | -0.1        | 17.2        | -5.8        |
| ULS-Set(47) | B5633  | 136.6     | -3.2       | -1.9       | -2.1        | -9.3        | 12.9        |
|             | B5699  | -126.8    | 0.7        | -1.4       | 7.2         | 7.7         | -3.9        |
|             | B6109  | -83.7     | -12.4      | -41.2      | -4.0        | 6.1         | 1.5         |
|             | B6110  | 47.7      | -7.4       | -28.5      | -2.0        | 3.0         | 0.1         |
| ULS-Set(49) | B5633  | 13.6      | 2.1        | -12.3      | -1.5        | -48.0       | -8.2        |
|             | B5699  | -150.6    | 3.1        | -4.3       | 8.5         | 24.6        | 6.0         |
|             | B6109  | -75.1     | -25.3      | 44.4       | 2.6         | -17.8       | -3.1        |
|             | B6110  | 72.7      | -5.9       | 23.8       | -1.5        | 9.3         | -4.9        |
| ULS-Set(50) | B5633  | 141.1     | -0.1       | -5.0       | -2.4        | -20.6       | 1.9         |
|             | B5699  | -152.3    | 0.4        | -2.7       | 8.7         | 14.6        | -4.9        |
|             | B6109  | -95.9     | -16.8      | -7.5       | -2.5        | -5.3        | 1.9         |
|             | B6110  | 60.0      | -10.5      | -52.4      | -3.5        | -3.6        | 0.2         |
| ULS-Set(52) | B5633  | 119.6     | 0.2        | -6.1       | -2.4        | -25.6       | 0.3         |
|             | B5699  | -152.5    | 1.1        | -2.6       | 9.1         | 15.7        | -2.4        |
|             | B6109  | -92.1     | -19.0      | 0.0        | -1.7        | -7.7        | 0.7         |
|             | B6110  | 63.7      | -9.6       | -38.4      | -3.4        | -0.8        | -1.0        |

## Check

### Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.0 < 5.0%     | OK     |
| Bolts    | 45.0 < 100%    | OK     |
| Welds    | 99.7 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

## Plates


| Name  | Thickness [mm] | Loads       | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|-------|----------------|-------------|---------------------|---------------------|----------------------|--------|
| B5633 | 12.5           | ULS-Set(13) | 161.4               | 0.0                 | 0.0                  | OK     |
| B5699 | 12.5           | ULS-Set(25) | 163.8               | 0.0                 | 0.0                  | OK     |
| B6109 | 12.5           | ULS-Set(13) | 110.3               | 0.0                 | 0.0                  | OK     |
| B6110 | 12.5           | ULS-Set(2)  | 124.5               | 0.0                 | 0.0                  | OK     |
| PP1a  | 12.0           | ULS-Set(9)  | 320.4               | 0.0                 | 32.6                 | OK     |
| PP1b  | 12.0           | ULS-Set(9)  | 299.4               | 0.0                 | 32.6                 | OK     |

## Design data


| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |

## Symbol explanation


|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |

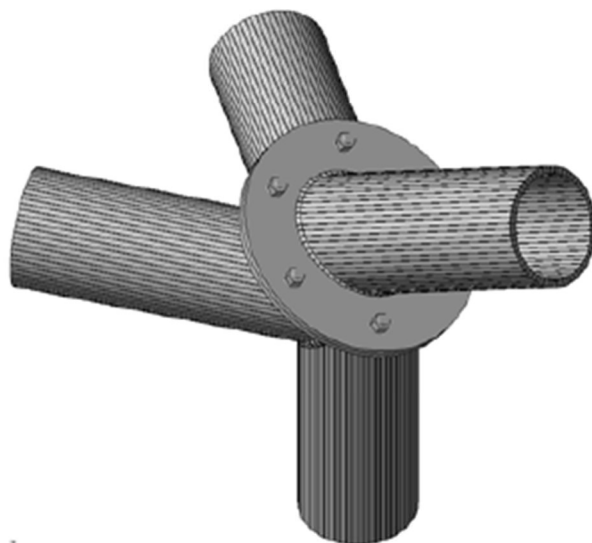

Overall check, ULS-Set(13)

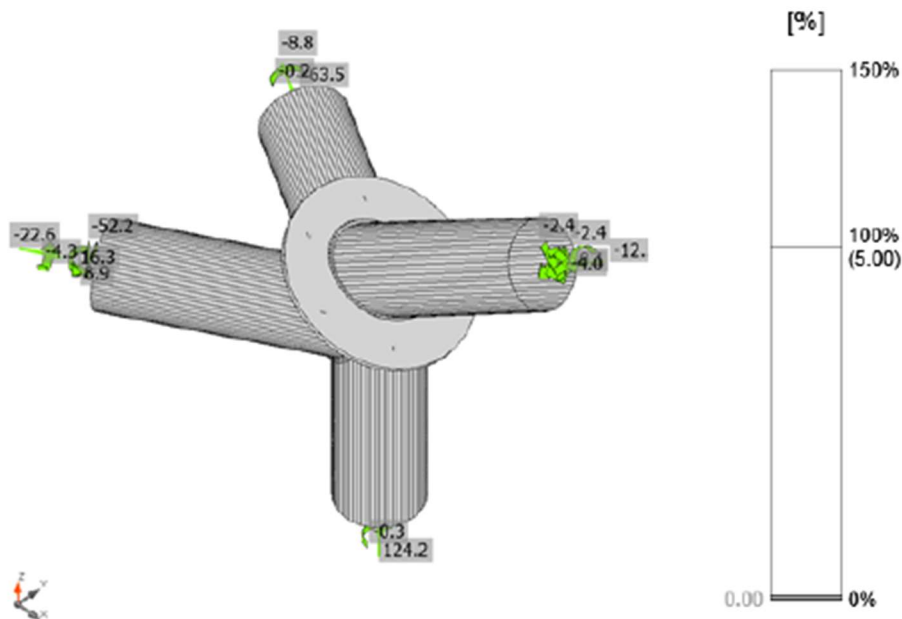


Strain check, ULS-Set(13)

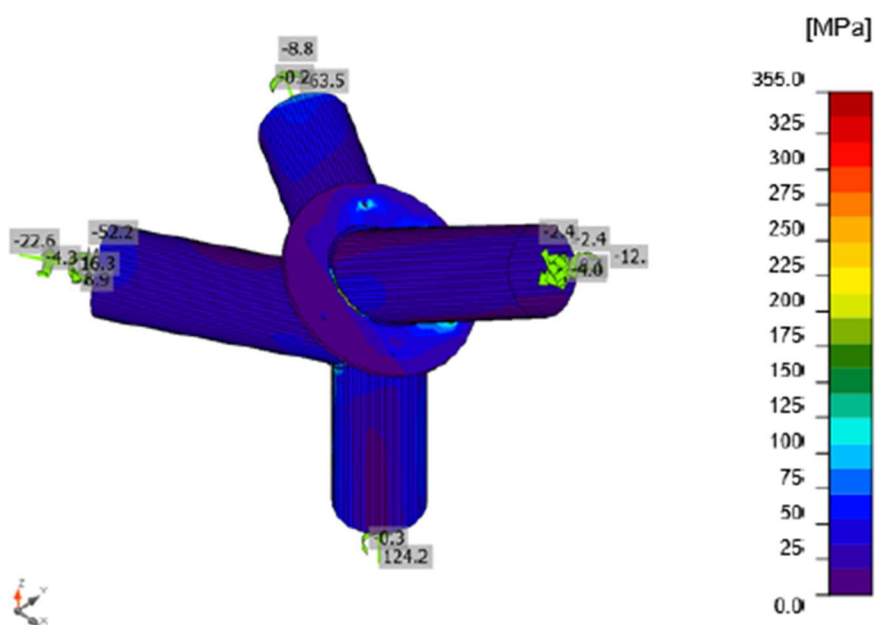

Equivalent stress, ULS-Set(13)

## Bolts

|   | Name | Loads       | $F_{t,Ed}$<br>[kN] | V<br>[kN] | $U_{t_t}$<br>[%] | $F_{b,Rd}$<br>[kN] | $U_{t_s}$<br>[%] | $U_{t_{ts}}$<br>[%] | Status |
|---|------|-------------|--------------------|-----------|------------------|--------------------|------------------|---------------------|--------|
|  | B1   | ULS-Set(25) | 7.5                | 23.1      | 5.3              | 235.2              | 24.6             | 28.4                | OK     |
|   | B2   | ULS-Set(25) | 41.2               | 21.8      | 29.2             | 235.2              | 23.2             | 44.0                | OK     |
|   | B3   | ULS-Set(9)  | 63.4               | 12.1      | 45.0             | 235.2              | 12.8             | 44.9                | OK     |
|   | B4   | ULS-Set(9)  | 27.0               | 2.6       | 19.1             | 235.2              | 2.8              | 16.4                | OK     |
|   | B5   | ULS-Set(12) | 15.4               | 5.4       | 10.9             | 235.2              | 5.8              | 13.6                | OK     |
|   | B6   | ULS-Set(12) | 47.2               | 5.8       | 33.5             | 235.2              | 6.2              | 30.1                | OK     |

## Design data

| Name        | $F_{t,Rd}$<br>[kN] | $B_{p,Rd}$<br>[kN] | $F_{v,Rd}$<br>[kN] |
|-------------|--------------------|--------------------|--------------------|
| M20 8.8 - 1 | 141.1              | 279.3              | 94.1               |

## Symbol explanation

|            |   |
|------------|---|
| $F_{t,Rd}$ | Bolt tension resistance EN 1993-1-8 tab. 3.4    |
| $F_{t,Ed}$ | Tension force                                   |
| $B_{p,Rd}$ | Punching shear resistance                       |
| V          | Resultant of shear forces $V_y$ , $V_z$ in bolt |
| $F_{v,Rd}$ | Bolt shear resistance EN_1993-1-8 table 3.4     |
| $F_{d,Rd}$ | Plate bearing resistance EN 1993-1-8 tab. 3.4   |
| $U_{t_t}$  | Utilization in tension                          |
| $U_{t_s}$  | Utilization in shear                            |



**Detailed result for B3****Tension resistance check (EN 1993-1-8 tab 3.4)**

$$F_{t,Rd} = \frac{k_2 f_{ub} A_s}{\gamma_{M2}} = 141.1 \text{ kN} \geq F_t = 63.4 \text{ kN}$$

where:

$$k_2 = 0.90 \quad - \text{Factor}$$

$$f_{ub} = 800.0 \text{ MPa} \quad - \text{Ultimate tensile strength of the bolt}$$

$$A_s = 245 \text{ mm}^2 \quad - \text{Tensile stress area of the bolt}$$

$$\gamma_{M2} = 1.25 \quad - \text{Safety factor}$$

**Punching resistance check (EN 1993-1-8 tab 3.4)**

$$B_{p,Rd} = \frac{0.6 \pi d_m t_p f_u}{\gamma_{M2}} = 279.3 \text{ kN} \geq F_t = 63.4 \text{ kN}$$

where:

$$d_m = 32 \text{ mm} \quad - \text{The mean of the across points and across flats dimensions of the bolt head or the nut, whichever is smaller}$$

$$t_p = 12 \text{ mm} \quad - \text{Thickness}$$

$$f_u = 490.0 \text{ MPa} \quad - \text{Ultimate strength}$$

$$\gamma_{M2} = 1.25 \quad - \text{Safety factor}$$

**Shear resistance check (EN 1993-1-8 tab 3.4)**

$$F_{v,Rd} = \frac{\beta_p \alpha_v f_{ub} A}{\gamma_{M2}} = 94.1 \text{ kN} \geq V = 12.1 \text{ kN}$$

where:

$$\beta_p = 1.00 \quad - \text{Reducing factor}$$

$$\alpha_v = 0.60 \quad - \text{Reducing factor}$$

$$f_{ub} = 800.0 \text{ MPa} \quad - \text{Ultimate tensile strength of the bolt}$$

$$A = 245 \text{ mm}^2 \quad - \text{Tensile stress area of the bolt}$$

$$\gamma_{M2} = 1.25 \quad - \text{Safety factor}$$

**Bearing resistance check (EN 1993-1-8 tab 3.4)**

$$F_{b,Rd} = \frac{k_1 \alpha_b f_u d t}{\gamma_{M2}} = 235.2 \text{ kN} \geq V = 12.1 \text{ kN}$$

where:

|   |   |
|---|---|
| $k_1 = \min(2.8 \frac{e_2}{d_0} - 1.7, 1.4 \frac{p_2}{d_0} - 1.7, 2.5) = 2.50$                    | - Factor for edge distance and bolt spacing perpendicular to the direction of load transfer |
| $e_2 = \infty \text{ mm}$   | - Distance to the plate edge perpendicular to the shear force                               |
| $p_2 = 180 \text{ mm}$  | - Distance between bolts perpendicular to the shear force                                   |
| $d_0 = 22 \text{ mm}$   | - Bolt hole diameter  |
| $\alpha_b = \min(\frac{e_1}{3d_0}, \frac{p_1}{3d_0} - \frac{1}{4}, \frac{f_{ub}}{f_u}, 1) = 1.00$ | - Factor for end distance and bolt spacing in direction of load transfer                    |
| $e_1 = \infty \text{ mm}$   | - Distance to the plate edge in the direction of the shear force                            |
| $p_1 = \infty \text{ mm}$   | - Distance between bolts in the direction of the shear force                                |
| $f_{ub} = 800.0 \text{ MPa}$  | - Ultimate tensile strength of the bolt   |
| $f_u = 490.0 \text{ MPa}$   | - Ultimate strength   |
| $d = 20 \text{ mm}$   | - Nominal diameter of the fastener  |
| $t = 12 \text{ mm}$   | - Thickness of the plate  |
| $\gamma_{M2} = 1.25$  | - Safety factor   |

**Interaction of tension and shear (EN 1993-1-8 tab 3.4)**

$$U_{tts} = \frac{F_{t,Rd}}{F_{t,Rd}} + \frac{F_{s,Rd}}{1.4F_{t,Rd}} = 44.9 \%$$

**Utilization in tension**

$$U_{tt} = \frac{F_{t,Rd}}{\min(F_{t,Rd}; B_{t,Rd})} = 45.0 \%$$

**Utilization in shear**

$$U_{ts} = \frac{V_{Ed}}{\min(F_{v,Rd}; F_{t,Rd})} = 12.8 \%$$

**Welds (Plastic redistribution)**

| Item         | Edge  | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|-------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B5633-arc 34 | B6109 | ▲6.3▲           | 652         | ULS-Set(20) | 132.6                 | 0.0                 | 6.2                    | -4.9                     | -76.3                | 30.4   | 5.6                 | OK     |
| B6109-arc 42 | B6110 | ▲6.3▲           | 263         | ULS-Set(30) | 90.5                  | 0.0                 | 19.5                   | -45.1                    | 23.9                 | 20.8   | 4.4                 | OK     |
| B5633-arc 63 | B6110 | ▲6.3▲           | 429         | ULS-Set(10) | 155.0                 | 0.0                 | 3.4                    | -4.8                     | -89.3                | 35.6   | 9.6                 | OK     |
| PP1a         | B5633 | ▲4.0            | 698         | ULS-Set(25) | 427.7                 | 0.5                 | -132.2                 | 22.5                     | 233.8                | 98.2   | 41.1                | OK     |
| PP1b         | B5699 | ▲4.0            | 698         | ULS-Set(25) | 434.2                 | 4.2                 | -195.9                 | 24.3                     | 222.4                | 99.7   | 40.4                | OK     |
|              |       | ▲6.3▲           | 652         | ULS-Set(18) | 82.0                  | 0.0                 | 4.1                    | -45.0                    | -14.6                | 18.8   | 5.1                 | OK     |
|              |       | ▲6.3▲           | 263         | ULS-Set(18) | 60.7                  | 0.0                 | 2.7                    | 34.8                     | -3.3                 | 13.9   | 6.9                 | OK     |
|              |       | ▲6.3▲           | 429         | ULS-Set(22) | 84.4                  | 0.0                 | -33.3                  | 33.6                     | 29.6                 | 19.4   | 9.7                 | OK     |



## Design data

|       | $\beta_w$<br>[-] | $\sigma_{w,Rd}$<br>[MPa] | $0.9 \sigma$<br>[MPa] |
|-------|------------------|--------------------------|-----------------------|
| S 355 | 0.90             | 435.6                    | 352.8                 |

## Symbol explanation

|                  |   |
|------------------|---|
| $\epsilon_{pl}$  | Strain  |
| $\sigma_{w,Ed}$  | Equivalent stress   |
| $\sigma_{w,Rd}$  | Equivalent stress resistance                                    |
| $\sigma_{\perp}$ | Perpendicular stress  |
| $\tau_{  }$      | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$   | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$     | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$        | Corelation factor EN 1993-1-8 tab. 4.1                          |
| $U_t$            | Utilization   |
| $U_{tc}$         | Weld capacity utilization                                       |

## Detailed result for PP1b B5699

Weld resistance check (EN 1993-1-8 4.5.3.2)

$$\sigma_{w,Rd} = f_u / (\beta_w \gamma_{M2}) = 435.6 \text{ MPa} \geq \sigma_{w,Ed} = [\sigma_{\perp}^2 + 3(\tau_{\perp}^2 + \tau_{||}^2)]^{0.5} = 434.2 \text{ MPa}$$

$$\sigma_{\perp,Rd} = 0.9 f_u / \gamma_{M2} = 352.8 \text{ MPa} \geq |\sigma_{\perp}| = 195.9 \text{ MPa}$$

where:

 $f_u = 490.0 \text{ MPa}$  – Ultimate strength $\beta_w = 0.90$  – appropriate correlation factor taken from Table 4.1 $\gamma_{M2} = 1.25$  – Safety factor

## Stress utilization

$$U_t = \max\left(\frac{\sigma_{w,Ed}}{\sigma_{w,Rd}}, \frac{|\sigma_{\perp}|}{\sigma_{\perp,Rd}}\right) = 99.7 \%$$

## Buckling

Buckling analysis was not calculated.

## Code settings

| Item  | Value | Unit | Reference            |
|-------|-------|------|----------------------|
| YM0   | 1.00  | -    | EN 1993-1-1: 6.1     |
| YM1   | 1.00  | -    | EN 1993-1-1: 6.1     |
| YM2   | 1.25  | -    | EN 1993-1-1: 6.1     |
| YM3   | 1.25  | -    | EN 1993-1-8: 2.2     |
| YC    | 1.50  | -    | EN 1992-1-1: 2.4.2.4 |
| Yinst | 1.20  | -    | EN 1992-4: Table 4.1 |

| Item                                    | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size | 0.10                   | -    |  |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                  | Plastic redistribution |      |  |
| Detailing                               | No                     |      |  |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated $a_b$ in bearing check.  | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                        | Yes                    |      | EN 1992-4  |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)         | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                           | No                     |      | EN 1993-1-8: 5.2.2.5                                       |


## 5.4. Karakteristični spoj sjecišta više štapova

### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5898                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

### Beams and columns

| Name  | Cross-section                  | $\beta$ - Direction [°] | $\gamma$ - Pitch [°]   | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|--------------------------------|-------------------------|--|-------------------------|----------------|----------------|----------------|-----------|
| B5537 | 1 - Massive O Hollow(CHS273,8) | 0.0                     | 0.0  | 0.0                     | 0              | 0              | -15            | Position  |
| B5538 | 1 - Massive O Hollow(CHS273,8) | 0.0                     | 0.0  | 0.0                     | 0              | 0              | 0              | Position  |
| B5539 | 1 - Massive O Hollow(CHS273,8) | 0.0                     | 0.0  | 0.0                     | 0              | 0              | 0              | Position  |
| B5540 | 1 - Massive O Hollow(CHS273,8) | 0.0                     | 0.0  | 0.0                     | 0              | 0              | 0              | Position  |
| B5541 | 1 - Massive O Hollow(CHS273,8) | 0.0                     | 0.0  | 0.0                     | 0              | 0              | 0              | Position  |
| B5542 | 1 - Massive O Hollow(CHS273,8) | 0.0                     | 0.0 </td <td>0.0</td> <td>0</td> <td>0</td> <td>0</td> <td>Position</td> | 0.0                     | 0              | 0              | 0              | Position  |
| B5717 | 2 - CHS(cf)219.1/12.5          | 0.0                     | 0.0  | 0.0                     | -200           | 0              | -60            | Position  |
| B5721 | 2 - CHS(cf)219.1/12.5          | 0.0                     | 0.0  | 0.0                     | -200           | 0              | -100           | Position  |
| B6255 | 4 - CHS840,10                  | 0.0                     | 0.0  | 0.0                     | -700           | 0              | 0              | Position  |

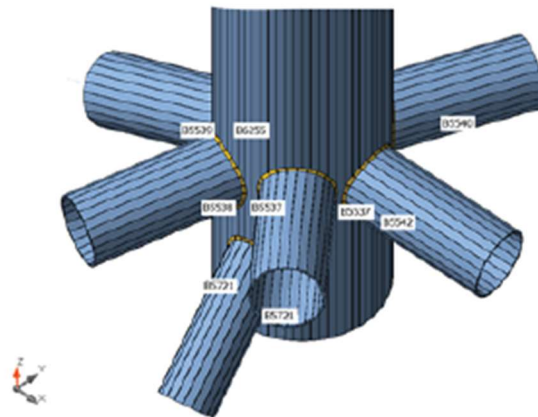

### Cross-sections

| Name                           | Material |
|--------------------------------|----------|
| 1 - Massive O Hollow(CHS273,8) | S 355    |
| 2 - CHS(cf)219.1/12.5          | S 355    |
| 4 - CHS840,10                  | S 355    |

## Load effects (forces in equilibrium)

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(2)  | B5537  | -73.4     | 0.1        | -26.2      | -2.2        | 51.2        | 1.1         |
|             | B5538  | 110.5     | -0.6       | -6.0       | -2.4        | -8.5        | 2.5         |
|             | B5539  | -92.8     | -0.3       | -23.7      | 1.2         | 61.2        | 1.0         |
|             | B5540  | 308.0     | -1.0       | -15.4      | 5.2         | -14.2       | 5.2         |
|             | B5541  | 83.6      | 0.7        | -17.9      | -5.2        | 32.2        | 2.6         |
|             | B5542  | -59.0     | -0.8       | -39.4      | -1.4        | -64.4       | 4.5         |
|             | B5717  | 76.6      | 3.2        | -2.0       | 3.3         | -9.0        | -13.9       |
|             | B5721  | 87.9      | 5.0        | 1.7        | -3.8        | 11.5        | -10.9       |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(3)  | B5537  | -11.4     | 0.0        | 5.0        | 0.6         | -15.2       | -0.3        |
|             | B5538  | 8.2       | -0.2       | -2.5       | -1.0        | -3.2        | 0.7         |
|             | B5539  | -19.6     | -0.1       | 4.4        | -1.3        | -10.6       | 0.0         |
|             | B5540  | 162.9     | 0.7        | 0.3        | -2.3        | -6.2        | -3.0        |
|             | B5541  | 138.8     | 0.7        | 4.9        | 0.6         | -15.0       | 3.4         |
|             | B5542  | -124.5    | 0.1        | 7.4        | 2.0         | 10.5        | -1.6        |
|             | B5717  | 17.6      | 1.6        | -0.2       | 0.2         | 3.1         | -5.3        |
|             | B5721  | 12.0      | -1.2       | -0.5       | 0.3         | 3.1         | 4.3         |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(12) | B5537  | -72.3     | 0.1        | -24.6      | -2.1        | 48.3        | 1.1         |
|             | B5538  | 108.5     | -0.6       | -5.0       | -2.3        | -7.1        | 2.4         |
|             | B5539  | -91.0     | -0.3       | -22.4      | 1.1         | 58.5        | 0.8         |
|             | B5540  | 300.8     | -1.0       | -14.3      | 5.0         | -12.7       | 5.0         |
|             | B5541  | 82.2      | 0.6        | -16.8      | -5.1        | 30.5        | 2.4         |
|             | B5542  | -59.8     | -0.8       | -37.8      | -1.5        | -62.0       | 4.4         |
|             | B5717  | 71.4      | 3.1        | -1.5       | 3.2         | -8.2        | -13.5       |
|             | B5721  | 82.2      | 4.8        | 2.0        | -3.8        | 11.2        | -10.2       |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(13) | B5537  | -89.5     | 0.0        | -18.5      | -1.6        | 34.0        | 0.8         |
|             | B5538  | 99.8      | -0.6       | -4.7       | -2.5        | -6.5        | 2.4         |
|             | B5539  | -89.4     | -0.4       | -17.0      | 0.3         | 45.5        | 0.6         |
|             | B5540  | 339.3     | -0.5       | -11.8      | 3.3         | -12.9       | 2.9         |
|             | B5541  | 136.3     | 0.9        | -11.9      | -4.3        | 19.1        | 3.6         |
|             | B5542  | -111.9    | -0.7       | -29.2      | -0.5        | -49.0       | 3.2         |
|             | B5717  | 67.4      | 3.4        | -0.9       | 3.0         | -5.2        | -14.3       |
|             | B5721  | 74.4      | 3.5        | 2.0        | -3.2        | 11.4        | -6.6        |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(14) | B5537  | -34.9     | 0.8        | -9.7       | -0.7        | 16.5        | 1.5         |
|             | B5538  | 56.8      | -1.3       | -4.2       | -1.6        | -5.7        | 2.9         |
|             | B5539  | -52.8     | -0.1       | -8.9       | -0.2        | 22.4        | 0.4         |
|             | B5540  | 215.9     | 0.7        | -6.9       | 1.3         | -9.8        | -0.5        |
|             | B5541  | 101.6     | 0.0        | -5.8       | -1.9        | 7.0         | 1.7         |

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B5542  | -77.2     | -0.1       | -14.4      | 0.4         | -24.4       | 0.6         |
|             | B5717  | 39.8      | 2.6        | -1.3       | 1.4         | -2.7        | -9.4        |
|             | B5721  | 46.7      | 0.9        | 0.9        | -1.2        | 7.5         | -1.6        |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(17) | B5537  | 49.3      | 0.1        | 2.6        | 0.9         | -3.7        | -0.1        |
|             | B5538  | -67.3     | 0.3        | -3.4       | 1.8         | -5.4        | -1.4        |
|             | B5539  | 62.7      | 0.5        | 3.2        | 0.6         | -14.8       | 0.9         |
|             | B5540  | -251.7    | 0.0        | 1.6        | -0.7        | 0.3         | -0.4        |
|             | B5541  | -127.5    | -0.6       | 0.8        | 2.6         | 0.3         | -2.2        |
|             | B5542  | 120.1     | 0.6        | 9.9        | 0.8         | 18.9        | -2.2        |
|             | B5717  | -19.5     | -2.0       | -2.6       | -2.0        | -1.7        | 9.5         |
|             | B5721  | -20.6     | -0.8       | -3.7       | 2.4         | -7.4        | -0.2        |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(28) | B5537  | -59.7     | 0.0        | -19.1      | -1.7        | 37.0        | 0.8         |
|             | B5538  | 89.3      | -0.5       | -3.7       | -1.9        | -4.9        | 2.0         |
|             | B5539  | -76.4     | -0.3       | -17.5      | 0.8         | 45.6        | 0.6         |
|             | B5540  | 262.0     | -0.7       | -11.4      | 3.7         | -10.4       | 3.7         |
|             | B5541  | 82.8      | 0.6        | -12.9      | -4.1        | 22.6        | 2.3         |
|             | B5542  | -62.6     | -0.7       | -29.2      | -1.1        | -48.0       | 3.5         |
|             | B5717  | 58.8      | 2.6        | -1.4       | 2.7         | -6.4        | -11.3       |
|             | B5721  | 66.3      | 3.8        | 1.4        | -3.0        | 8.9         | -8.1        |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(29) | B5537  | 50.4      | 0.1        | 4.1        | 0.9         | -6.5        | -0.1        |
|             | B5538  | -69.2     | 0.3        | -2.4       | 1.9         | -3.9        | -1.5        |
|             | B5539  | 64.5      | 0.5        | 4.5        | 0.5         | -17.5       | 0.7         |
|             | B5540  | -259.0    | 0.0        | 2.7        | -0.9        | 1.8         | -0.6        |
|             | B5541  | -128.9    | -0.6       | 1.9        | 2.7         | -1.4        | -2.4        |
|             | B5542  | 119.3     | 0.6        | 11.5       | 0.7         | 21.3        | -2.2        |
|             | B5717  | -24.8     | -2.2       | -2.1       | -2.1        | -1.0        | 9.9         |
|             | B5721  | -26.2     | -1.1       | -3.4       | 2.4         | -7.7        | 0.5         |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(30) | B5537  | -70.6     | 0.0        | -20.0      | -1.7        | 36.8        | 0.8         |
|             | B5538  | 101.8     | -0.6       | -5.7       | -2.6        | -8.0        | 2.5         |
|             | B5539  | -91.2     | -0.4       | -18.3      | 0.4         | 48.1        | 0.8         |
|             | B5540  | 346.6     | -0.6       | -12.8      | 3.5         | -14.4       | 3.1         |
|             | B5541  | 137.8     | 0.9        | -13.0      | -4.4        | 20.8        | 3.7         |
|             | B5542  | -111.1    | -0.7       | -30.8      | -0.4        | -51.4       | 3.3         |
|             | B5717  | 72.7      | 3.5        | -1.4       | 3.0         | -6.0        | -14.6       |
|             | B5721  | 80.0      | 3.8        | 1.7        | -3.3        | 11.6        | -7.3        |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(40) | B5537  | -56.9     | 0.0        | -13.0      | -1.2        | 22.6        | 0.5         |
|             | B5538  | 80.6      | -0.5       | -3.4       | -2.1        | -4.4        | 2.0         |
|             | B5539  | -74.8     | -0.4       | -12.0      | 0.0         | 32.6        | 0.3         |

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B5540  | 300.5     | -0.2       | -8.8       | 2.0         | -10.5       | 1.7         |
|             | B5541  | 137.0     | 0.8        | -8.0       | -3.3        | 11.2        | 3.4         |
|             | B5542  | -114.7    | -0.6       | -20.7      | -0.1        | -35.0       | 2.4         |
|             | B5717  | 54.8      | 2.9        | -0.8       | 2.4         | -3.4        | -12.0       |
|             | B5721  | 58.5      | 2.5        | 1.4        | -2.5        | 9.1         | -4.4        |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(43) | B5537  | -25.1     | 0.0        | -2.1       | 0.1         | -1.1        | 0.0         |
|             | B5538  | 29.3      | -0.3       | -4.8       | -1.5        | -6.8        | 1.2         |
|             | B5539  | -36.0     | -0.2       | -1.9       | -0.9        | 5.0         | 0.4         |
|             | B5540  | 209.0     | 0.4        | -3.7       | -0.8        | -10.0       | -1.6        |
|             | B5541  | 139.6     | 0.8        | 0.0        | -0.5        | -5.4        | 3.7         |
|             | B5542  | -120.9    | -0.1       | -2.7       | 1.7         | -5.9        | -0.7        |
|             | B5717  | 35.5      | 2.2        | -0.8       | 0.9         | 0.5         | -7.9        |
|             | B5721  | 33.6      | 0.0        | -0.2       | -0.4        | 5.7         | 1.4         |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(44) | B5537  | -34.5     | 0.4        | -4.0       | -0.3        | 3.5         | 0.8         |
|             | B5538  | 49.6      | -0.9       | -2.9       | -1.7        | -3.6        | 2.3         |
|             | B5539  | -51.9     | -0.2       | -3.9       | -0.8        | 10.9        | 0.0         |
|             | B5540  | 249.6     | 0.7        | -4.4       | -0.2        | -8.8        | -1.6        |
|             | B5541  | 148.6     | 0.4        | -1.4       | -1.3        | -2.9        | 3.0         |
|             | B5542  | -125.1    | -0.2       | -6.6       | 1.0         | -12.4       | 0.1         |
|             | B5717  | 35.9      | 2.6        | -0.6       | 1.3         | -0.1        | -9.6        |
|             | B5721  | 37.1      | 0.2        | 0.7        | -1.0        | 6.9         | 0.8         |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(45) | B5537  | -48.2     | 0.5        | -11.1      | -0.8        | 17.7        | 1.1         |
|             | B5538  | 70.8      | -1.0       | -5.3       | -2.1        | -7.1        | 2.8         |
|             | B5539  | -68.3     | -0.3       | -10.2      | -0.4        | 26.5        | 0.5         |
|             | B5540  | 295.7     | 0.4        | -8.4       | 1.3         | -12.7       | -0.1        |
|             | B5541  | 149.4     | 0.5        | -6.3       | -2.4        | 6.7         | 3.3         |
|             | B5542  | -121.5    | -0.3       | -16.8      | 0.7         | -28.8       | 1.0         |
|             | B5717  | 53.7      | 3.2        | -1.3       | 1.9         | -2.7        | -12.2       |
|             | B5721  | 58.7      | 1.4        | 1.0        | -1.7        | 9.4         | -2.1        |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(49) | B5537  | -35.6     | 0.4        | -5.6       | -0.4        | 6.3         | 0.9         |
|             | B5538  | 51.6      | -0.9       | -3.9       | -1.7        | -5.0        | 2.3         |
|             | B5539  | -53.7     | -0.2       | -5.2       | -0.7        | 13.6        | 0.2         |
|             | B5540  | 256.9     | 0.7        | -5.4       | 0.0         | -10.3       | -1.4        |
|             | B5541  | 150.0     | 0.4        | -2.4       | -1.4        | -1.2        | 3.2         |
|             | B5542  | -124.3    | -0.2       | -8.2       | 1.1         | -14.8       | 0.1         |
|             | B5717  | 41.1      | 2.7        | -1.1       | 1.3         | -0.8        | -10.0       |
|             | B5721  | 42.8      | 0.4        | 0.3        | -1.0        | 7.1         | 0.1         |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(50) | B5537  | -47.2     | 0.5        | -10.9      | -0.8        | 17.1        | 1.4         |



| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B5538  | 64.7      | -0.2       | -5.2       | -2.1        | -6.6        | 1.3         |
|             | B5539  | -67.6     | -0.8       | -10.1      | -0.2        | 26.3        | 0.0         |
|             | B5540  | 269.8     | -0.3       | -8.2       | 1.4         | -11.9       | 1.2         |
|             | B5541  | 133.8     | 0.6        | -6.4       | -2.3        | 7.9         | 3.4         |
|             | B5542  | -105.6    | -0.8       | -16.6      | 0.8         | -28.0       | 1.9         |
|             | B5717  | 53.3      | 3.4        | -0.8       | 1.5         | -2.1        | -11.9       |
|             | B5721  | 51.4      | 1.8        | 0.2        | -1.7        | 7.9         | -2.8        |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(54) | B5537  | -69.7     | 0.1        | -24.2      | -2.0        | 47.1        | 1.0         |
|             | B5538  | 103.4     | -0.6       | -6.1       | -2.4        | -8.8        | 2.4         |
|             | B5539  | -87.2     | -0.3       | -21.9      | 1.0         | 57.0        | 1.0         |
|             | B5540  | 293.7     | -0.9       | -14.3      | 4.8         | -13.6       | 4.6         |
|             | B5541  | 82.2      | 0.7        | -16.4      | -4.8        | 29.6        | 2.5         |
|             | B5542  | -60.3     | -0.7       | -37.0      | -1.1        | -60.8       | 4.0         |
|             | B5717  | 71.5      | 3.1        | -1.5       | 3.1         | -7.9        | -13.4       |
|             | B5721  | 82.7      | 4.5        | 2.1        | -3.5        | 11.5        | -9.5        |
|             | B6255  | -0.6      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |
| ULS-Set(55) | B5537  | -48.4     | 0.5        | -16.8      | -1.1        | 30.8        | 1.4         |
|             | B5538  | 74.4      | -1.0       | -6.6       | -2.0        | -9.4        | 2.7         |
|             | B5539  | -66.1     | -0.2       | -15.1      | 0.3         | 38.0        | 0.9         |
|             | B5540  | 250.1     | 0.0        | -10.9      | 2.8         | -13.4       | 1.6         |
|             | B5541  | 95.2      | 0.3        | -10.9      | -3.0        | 17.2        | 2.3         |
|             | B5542  | -69.9     | -0.3       | -24.6      | 0.1         | -40.7       | 1.7         |
|             | B5717  | 57.8      | 3.0        | -1.9       | 2.0         | -5.3        | -11.4       |
|             | B5721  | 67.0      | 2.4        | 1.0        | -2.0        | 9.6         | -5.1        |
|             | B6255  | -0.8      | 0.0        | 0.0        | 0.0         | 0.0         | 0.0         |

### Check

### Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.2 < 5.0%     | OK     |
| Welds    | 98.0 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

## Plates


| Name   | Thickness [mm] | Loads       | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|--------|----------------|-------------|---------------------|---------------------|----------------------|--------|
| B5537  | 8.0            | ULS-Set(2)  | 158.9               | 0.0                 | 0.0                  | OK     |
| B5538  | 8.0            | ULS-Set(2)  | 81.6                | 0.0                 | 0.0                  | OK     |
| B5539  | 8.0            | ULS-Set(2)  | 203.1               | 0.0                 | 0.0                  | OK     |
| B5540  | 8.0            | ULS-Set(2)  | 247.8               | 0.0                 | 0.0                  | OK     |
| B5541  | 8.0            | ULS-Set(30) | 165.0               | 0.0                 | 0.0                  | OK     |
| B5542  | 8.0            | ULS-Set(30) | 206.9               | 0.0                 | 0.0                  | OK     |
| B5717  | 12.5           | ULS-Set(2)  | 155.5               | 0.0                 | 0.0                  | OK     |
| B5721  | 12.5           | ULS-Set(2)  | 98.9                | 0.0                 | 0.0                  | OK     |
| B6255  | 10.0           | ULS-Set(30) | 355.4               | 0.2                 | 0.0                  | OK     |
| STIFF1 | 20.0           | ULS-Set(30) | 178.8               | 0.0                 | 0.0                  | OK     |

## Design data

| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |


## Symbol explanation

|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |

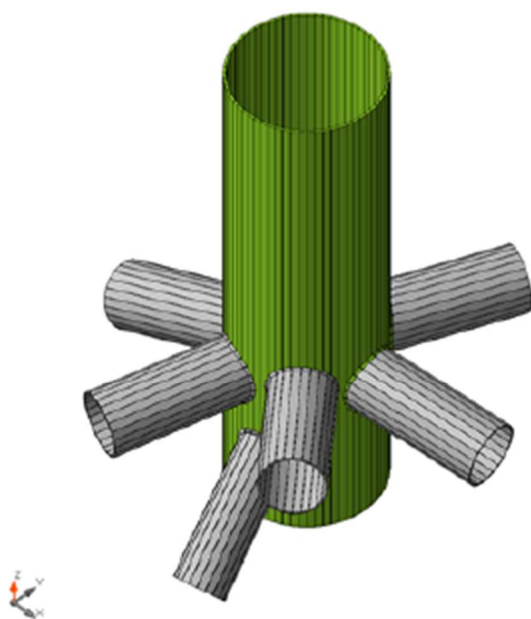


Overall check, ULS-Set(2)




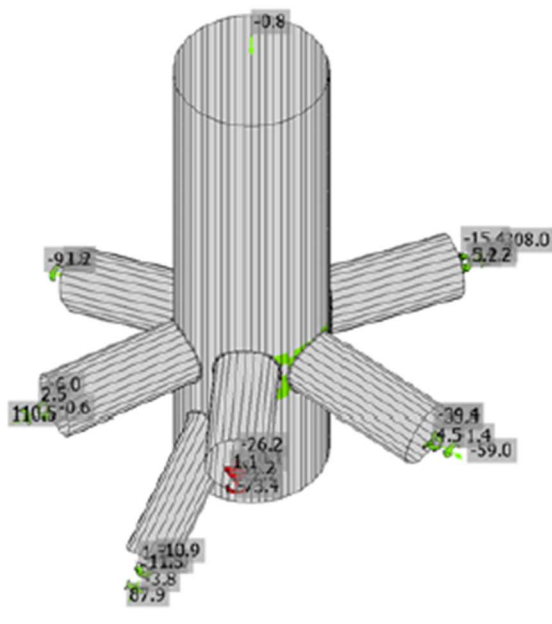

Strain check, ULS-Set(2)

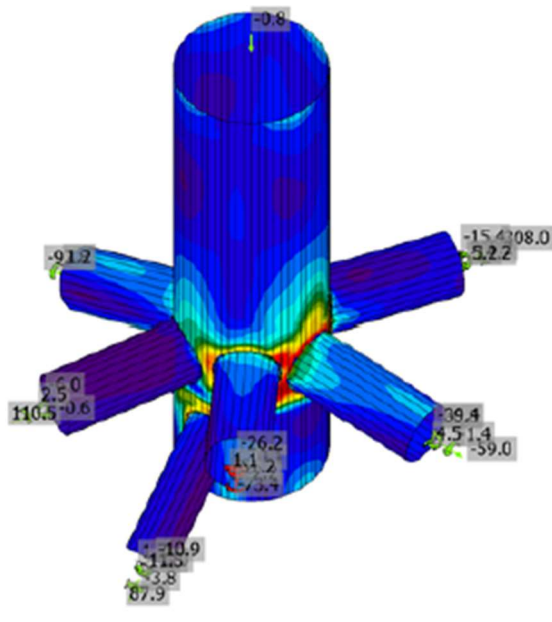

Equivalent stress, ULS-Set(2)



## Welds (Plastic redistribution)

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6255-arc 10 | B5717  | ▲6.0            | 855         | ULS-Set(2)  | 275.8                 | 0.0                 | 25.6                   | -114.3                   | 109.9                | 63.3   | 23.1                | OK     |
| B6255-arc 35 | B5721  | ▲6.0            | 752         | ULS-Set(2)  | 250.4                 | 0.0                 | 134.7                  | -35.2                    | 116.6                | 57.5   | 20.8                | OK     |
| B6255-arc 20 | B5539  | ▲6.0            | 858         | ULS-Set(2)  | 428.9                 | 0.1                 | -232.6                 | 140.9                    | 151.2                | 98.0   | 33.9                | OK     |
| B6255-arc 28 | B5538  | ▲6.0            | 835         | ULS-Set(2)  | 146.3                 | 0.0                 | -20.5                  | -21.7                    | 80.8                 | 33.6   | 13.3                | OK     |
| B6255-arc 38 | B5537  | ▲6.0            | 835         | ULS-Set(2)  | 225.8                 | 0.0                 | -147.1                 | -73.4                    | 66.3                 | 51.8   | 29.2                | OK     |
| B6255-arc 46 | B5542  | ▲6.0            | 833         | ULS-Set(30) | 329.5                 | 0.0                 | 255.5                  | 57.5                     | -105.4               | 75.6   | 35.0                | OK     |
| B6255-arc 1  | B5540  | ▲6.0            | 799         | ULS-Set(2)  | 368.6                 | 0.0                 | 35.0                   | -210.5                   | 23.7                 | 84.6   | 41.1                | OK     |
| B6255-arc 3  | B5541  | ▲6.0            | 844         | ULS-Set(2)  | 288.8                 | 0.0                 | 203.6                  | -41.6                    | -110.7               | 66.3   | 24.5                | OK     |
| B6255-arc 1  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 257.1                 | 0.0                 | -32.6                  | -142.3                   | -38.0                | 59.0   | 59.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 117.0                 | 0.0                 | 26.2                   | 60.0                     | -27.0                | 26.9   | 26.9                | OK     |
| B6255-arc 2  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 247.3                 | 0.0                 | 10.8                   | -142.6                   | 5.3                  | 56.8   | 56.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 98.7                  | 0.0                 | 3.8                    | 56.7                     | -5.1                 | 22.7   | 22.7                | OK     |
| B6255-arc 3  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 237.3                 | 0.0                 | 40.2                   | -131.2                   | 32.0                 | 54.5   | 54.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 93.1                  | 0.0                 | -5.3                   | 53.6                     | 1.6                  | 21.4   | 21.4                | OK     |
| B6255-arc 4  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 199.4                 | 0.0                 | 60.6                   | -103.2                   | 37.2                 | 45.8   | 45.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 70.1                  | 0.0                 | -23.5                  | 37.8                     | 5.3                  | 16.1   | 16.1                | OK     |
| B6255-arc 5  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(3)  | 198.6                 | 0.0                 | 97.0                   | -46.3                    | 88.7                 | 45.6   | 45.6                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(3)  | 120.7                 | 0.0                 | 39.4                   | 45.8                     | -47.4                | 27.7   | 27.7                | OK     |
| B6255-arc 6  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(3)  | 178.2                 | 0.0                 | 90.0                   | 19.5                     | 86.6                 | 40.9   | 40.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 167.9                 | 0.0                 | -85.0                  | 37.6                     | 74.7                 | 38.5   | 38.5                | OK     |
| B6255-arc 7  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 109.4                 | 0.0                 | 3.4                    | -61.4                    | -14.5                | 25.1   | 25.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 172.2                 | 0.0                 | -84.3                  | 40.7                     | 76.6                 | 39.5   | 39.5                | OK     |
| B6255-arc 8  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 102.2                 | 0.0                 | -17.8                  | -46.2                    | -35.2                | 23.5   | 23.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 198.2                 | 0.0                 | -97.7                  | 41.6                     | 90.4                 | 45.5   | 45.5                | OK     |
| B6255-arc 9  | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 131.8                 | 0.0                 | -27.6                  | -67.8                    | -30.8                | 30.3   | 30.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 188.2                 | 0.0                 | -66.6                  | 70.9                     | 72.8                 | 43.2   | 43.2                | OK     |
| B6255-arc 10 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 88.6                  | 0.0                 | -2.2                   | -51.1                    | -0.6                 | 20.3   | 20.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 99.3                  | 0.0                 | -14.3                  | 51.0                     | 24.8                 | 22.8   | 22.8                | OK     |
| B6255-arc 11 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 60.5                  | 0.0                 | 20.6                   | -28.7                    | 15.9                 | 13.9   | 13.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 56.4                  | 0.0                 | 5.5                    | 32.4                     | -1.4                 | 12.9   | 12.9                | OK     |
| B6255-arc 12 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 43.7                  | 0.0                 | 13.2                   | -11.8                    | 21.0                 | 10.0   | 10.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 28.4                  | 0.0                 | 10.0                   | 15.3                     | 1.6                  | 6.5    | 6.5                 | OK     |
| B6255-arc 13 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(17) | 41.6                  | 0.0                 | 9.9                    | -23.4                    | -0.5                 | 9.6    | 9.6                 | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 44.6                  | 0.0                 | 19.7                   | -22.8                    | 3.8                  | 10.2   | 10.2                | OK     |
| B6255-arc 14 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 187.8                 | 0.0                 | -62.2                  | 83.1                     | -59.7                | 43.1   | 43.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 283.2                 | 0.0                 | -94.9                  | -110.1                   | 107.7                | 65.0   | 65.0                | OK     |
| B6255-arc 15 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 99.5                  | 0.0                 | -27.9                  | -12.9                    | -53.6                | 22.8   | 22.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 335.8                 | 0.0                 | -175.2                 | -28.2                    | 162.9                | 77.1   | 77.1                | OK     |
| B6255-arc 16 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 64.4                  | 0.0                 | 47.0                   | 19.9                     | 15.9                 | 14.8   | 14.8                | OK     |

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 201.6                 | 0.0                 | -109.4                 | -30.5                    | 92.9                 | 46.3   | 46.3                | OK     |
| B6255-arc 17 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 86.6                  | 0.0                 | 48.3                   | 27.9                     | 30.7                 | 19.9   | 19.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 173.9                 | 0.0                 | -97.8                  | -19.2                    | 84.5                 | 39.9   | 39.9                | OK     |
| B6255-arc 18 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 108.2                 | 0.0                 | 57.1                   | 33.7                     | 41.0                 | 24.9   | 24.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 181.4                 | 0.0                 | -90.9                  | -17.5                    | 88.9                 | 41.7   | 41.7                | OK     |
| B6255-arc 19 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 95.1                  | 0.0                 | 56.5                   | 36.9                     | 24.3                 | 21.8   | 21.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 199.3                 | 0.0                 | -113.3                 | -0.3                     | 94.7                 | 45.8   | 45.8                | OK     |
| B6255-arc 20 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 204.4                 | 0.0                 | -8.9                   | 99.5                     | -63.2                | 46.9   | 46.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 407.2                 | 0.0                 | -233.5                 | -18.9                    | 191.7                | 93.5   | 93.5                | OK     |
| B6255-arc 21 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 160.6                 | 0.0                 | -72.9                  | -20.2                    | -80.1                | 36.9   | 36.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 387.1                 | 0.0                 | -161.3                 | 120.5                    | 163.6                | 88.9   | 88.9                | OK     |
| B6255-arc 22 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 98.8                  | 0.0                 | -31.4                  | 52.7                     | -12.2                | 22.7   | 22.7                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 65.9                  | 0.0                 | 18.9                   | 35.8                     | 7.1                  | 15.1   | 15.1                | OK     |
| B6255-arc 23 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 142.6                 | 0.0                 | -2.8                   | 82.2                     | 4.3                  | 32.7   | 32.7                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 60.5                  | 0.0                 | 38.5                   | -9.3                     | -25.3                | 13.9   | 13.9                | OK     |
| B6255-arc 24 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 168.8                 | 0.0                 | -28.6                  | 94.1                     | -19.5                | 38.8   | 38.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 106.3                 | 0.0                 | 52.2                   | -38.4                    | -37.2                | 24.4   | 24.4                | OK     |
| B6255-arc 25 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 173.2                 | 0.0                 | -35.7                  | 94.0                     | -27.0                | 39.8   | 39.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 132.4                 | 0.0                 | 54.2                   | -57.4                    | -39.7                | 30.4   | 30.4                | OK     |
| B6255-arc 26 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 182.1                 | 0.0                 | -53.3                  | 92.1                     | -40.2                | 41.8   | 41.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 143.6                 | 0.0                 | 53.5                   | -68.7                    | -34.5                | 33.0   | 33.0                | OK     |
| B6255-arc 27 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 191.6                 | 0.0                 | -70.9                  | 84.5                     | -58.5                | 44.0   | 44.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 156.3                 | 0.0                 | 49.5                   | -79.8                    | -31.0                | 35.9   | 35.9                | OK     |
| B6255-arc 28 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 192.9                 | 0.0                 | -86.3                  | 71.0                     | -69.9                | 44.3   | 44.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 154.5                 | 0.0                 | 44.4                   | -82.6                    | -21.8                | 35.5   | 35.5                | OK     |
| B6255-arc 29 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 147.5                 | 0.0                 | -73.1                  | 45.8                     | -58.1                | 33.9   | 33.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 146.7                 | 0.0                 | 15.8                   | -84.1                    | 4.7                  | 33.7   | 33.7                | OK     |
| B6255-arc 30 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 125.4                 | 0.0                 | -62.5                  | 31.5                     | -54.3                | 28.8   | 28.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 120.4                 | 0.0                 | -8.7                   | -67.4                    | 16.3                 | 27.7   | 27.7                | OK     |
| B6255-arc 31 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(45) | 67.7                  | 0.0                 | -34.8                  | 12.0                     | -31.3                | 15.5   | 15.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 111.6                 | 0.0                 | -37.8                  | -52.1                    | 30.9                 | 25.6   | 25.6                | OK     |
| B6255-arc 32 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(44) | 29.9                  | 0.0                 | -14.2                  | 5.2                      | -14.3                | 6.9    | 6.9                 | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 138.1                 | 0.0                 | -77.3                  | -24.7                    | 61.3                 | 31.7   | 31.7                | OK     |
| B6255-arc 33 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 36.6                  | 0.0                 | 34.0                   | -2.3                     | 7.5                  | 9.6    | 8.4                 | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 143.0                 | 0.0                 | -88.2                  | 2.5                      | 65.0                 | 32.8   | 32.8                | OK     |
| B6255-arc 34 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 39.9                  | 0.0                 | 33.8                   | -11.3                    | 4.8                  | 9.6    | 9.2                 | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 121.4                 | 0.0                 | -69.2                  | 37.5                     | 43.7                 | 27.9   | 27.9                | OK     |
| B6255-arc 35 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(17) | 37.1                  | 0.0                 | 7.4                    | 17.8                     | 11.1                 | 8.5    | 8.5                 | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 121.0                 | 0.0                 | -36.4                  | 62.1                     | 24.0                 | 27.8   | 27.8                | OK     |
| B6255-arc 36 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(17) | 50.5                  | 0.0                 | 13.6                   | 25.6                     | 11.5                 | 11.6   | 11.6                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 114.7                 | 0.0                 | 8.5                    | 66.0                     | -0.4                 | 26.3   | 26.3                | OK     |



| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pI}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6255-arc 37 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 97.6                  | 0.0                 | -52.4                  | -21.9                    | -42.2                | 22.4   | 22.4                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 125.9                 | 0.0                 | 51.8                   | 57.2                     | -33.4                | 28.9   | 28.9                | OK     |
| B6255-arc 38 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 136.3                 | 0.0                 | -75.2                  | -36.8                    | -54.3                | 31.3   | 31.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 124.8                 | 0.0                 | 68.5                   | 46.5                     | -38.3                | 28.7   | 28.7                | OK     |
| B6255-arc 39 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 157.9                 | 0.0                 | -75.3                  | -58.7                    | -54.5                | 36.3   | 36.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 110.3                 | 0.0                 | 62.6                   | 41.4                     | -32.2                | 25.3   | 25.3                | OK     |
| B6255-arc 40 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 183.5                 | 0.0                 | -71.1                  | -81.7                    | -53.4                | 42.1   | 42.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 101.8                 | 0.0                 | 45.1                   | 45.8                     | -26.1                | 23.4   | 23.4                | OK     |
| B6255-arc 41 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 189.6                 | 0.0                 | -43.6                  | -100.0                   | -36.8                | 43.5   | 43.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 86.9                  | 0.0                 | 28.2                   | 43.5                     | -19.0                | 20.0   | 20.0                | OK     |
| B6255-arc 42 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 186.5                 | 0.0                 | -4.2                   | -107.5                   | -5.3                 | 42.8   | 42.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 66.3                  | 0.0                 | 5.5                    | 38.0                     | -3.3                 | 15.2   | 15.2                | OK     |
| B6255-arc 43 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 178.4                 | 0.0                 | 32.2                   | -99.4                    | 19.7                 | 41.0   | 41.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 59.9                  | 0.0                 | -17.9                  | 31.9                     | 8.6                  | 13.8   | 13.8                | OK     |
| B6255-arc 44 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 154.7                 | 0.0                 | 59.6                   | -73.4                    | 37.5                 | 35.5   | 35.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 64.1                  | 0.0                 | -34.8                  | 27.3                     | 14.8                 | 14.7   | 14.7                | OK     |
| B6255-arc 45 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 140.6                 | 0.0                 | 77.5                   | -42.5                    | 52.7                 | 32.3   | 32.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 70.7                  | 0.0                 | -47.2                  | 18.8                     | 23.9                 | 16.2   | 16.2                | OK     |
| B6255-arc 46 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 88.5                  | 0.0                 | 61.6                   | -5.6                     | 36.2                 | 20.3   | 20.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 54.4                  | 0.0                 | -40.1                  | 13.8                     | 16.2                 | 12.5   | 12.5                | OK     |
| B6255-arc 47 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 80.6                  | 0.0                 | 45.0                   | 28.9                     | 25.6                 | 18.5   | 18.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 52.2                  | 0.0                 | -38.1                  | -2.4                     | 20.5                 | 12.0   | 12.0                | OK     |
| B6255-arc 48 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 123.1                 | 0.0                 | -22.6                  | 65.2                     | -25.0                | 28.3   | 28.3                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(2)  | 63.2                  | 0.0                 | -27.2                  | -18.1                    | 27.5                 | 14.5   | 14.5                | OK     |
| B6255-arc 49 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 222.7                 | 0.0                 | -105.8                 | 67.6                     | -90.7                | 51.1   | 51.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 68.6                  | 0.0                 | -11.2                  | -32.6                    | 21.5                 | 15.8   | 15.8                | OK     |
| B6255-arc 50 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 253.1                 | 0.0                 | -136.0                 | 51.8                     | -111.9               | 58.1   | 58.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 78.4                  | 0.0                 | -12.2                  | -34.6                    | 28.3                 | 18.0   | 18.0                | OK     |
| B6255-arc 51 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(2)  | 222.5                 | 0.0                 | -128.3                 | 31.9                     | -100.0               | 51.1   | 51.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 83.8                  | 0.0                 | -8.9                   | -39.2                    | 28.0                 | 19.2   | 19.2                | OK     |
| B6255-arc 52 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(3)  | 145.7                 | 0.0                 | 55.6                   | 62.8                     | 45.8                 | 33.5   | 33.5                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 78.9                  | 0.0                 | -12.6                  | -41.5                    | 17.3                 | 18.1   | 18.1                | OK     |
| B6255-arc 53 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(3)  | 134.9                 | 0.0                 | 31.0                   | 70.5                     | 28.0                 | 31.0   | 31.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 95.8                  | 0.0                 | -24.9                  | -52.7                    | 8.8                  | 22.0   | 22.0                | OK     |
| B6255-arc 54 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(45) | 161.3                 | 0.0                 | 30.0                   | 89.7                     | 17.9                 | 37.0   | 37.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 107.2                 | 0.0                 | -28.9                  | -58.3                    | 12.4                 | 24.6   | 24.6                | OK     |
| B6255-arc 55 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 195.9                 | 0.0                 | 36.5                   | 109.5                    | 18.7                 | 45.0   | 45.0                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 109.8                 | 0.0                 | -29.3                  | -59.9                    | 12.1                 | 25.2   | 25.2                | OK     |
| B6255-arc 56 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 221.2                 | 0.0                 | 12.2                   | 127.5                    | -4.1                 | 50.8   | 50.8                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 103.9                 | 0.0                 | -13.4                  | -59.5                    | -1.5                 | 23.9   | 23.9                | OK     |
| B6255-arc 57 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 227.1                 | 0.0                 | -10.8                  | 130.1                    | -15.5                | 52.1   | 52.1                | OK     |

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 99.5                  | 0.0                 | -2.7                   | -57.4                    | 0.4                  | 22.8   | 22.8                | OK     |
| B6255-arc 58 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 235.8                 | 0.0                 | -55.2                  | 121.0                    | -53.7                | 54.1   | 54.1                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 92.4                  | 0.0                 | 18.3                   | -50.7                    | -12.8                | 21.2   | 21.2                | OK     |
| B6255-arc 59 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 254.2                 | 0.0                 | -103.7                 | 95.4                     | -94.1                | 58.4   | 58.4                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 93.7                  | 0.0                 | 42.0                   | -40.7                    | -26.1                | 21.5   | 21.5                | OK     |
| B6255-arc 60 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 243.3                 | 0.0                 | -129.1                 | 53.0                     | -106.6               | 55.9   | 55.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 84.3                  | 0.0                 | 60.1                   | -17.0                    | -29.6                | 19.4   | 19.4                | OK     |
| B6255-arc 61 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 247.1                 | 0.0                 | -143.1                 | -8.9                     | -115.9               | 56.7   | 56.7                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 96.9                  | 0.0                 | 71.2                   | 13.9                     | -35.3                | 22.2   | 22.2                | OK     |
| B6255-arc 62 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 267.3                 | 0.0                 | -136.4                 | -60.8                    | -118.0               | 61.4   | 61.4                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 114.4                 | 0.0                 | 65.4                   | 37.8                     | -38.8                | 26.3   | 26.3                | OK     |
| B6255-arc 63 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 259.9                 | 0.0                 | -103.1                 | -106.7                   | -87.1                | 59.7   | 59.7                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 118.1                 | 0.0                 | 57.8                   | 48.2                     | -34.9                | 27.1   | 27.1                | OK     |
| B6255-arc 64 | STIFF1 | ▲4.0▲           | 30          | ULS-Set(30) | 252.4                 | 0.0                 | -56.7                  | -133.7                   | -47.7                | 57.9   | 57.9                | OK     |
|              |        | ▲4.0▲           | 30          | ULS-Set(30) | 113.5                 | 0.0                 | 34.8                   | 58.9                     | -20.4                | 26.1   | 26.1                | OK     |

**Design data**

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | $0.9 \sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

**Symbol explanation**

|                    |   |
|--------------------|---|
| $\epsilon_{pl}$    | Strain  |
| $\sigma_{w,Ed}$    | Equivalent stress   |
| $\sigma_{w,Rd}$    | Equivalent stress resistance                                    |
| $\sigma_{\perp}$   | Perpendicular stress  |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$       | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$          | Correlation factor EN 1993-1-8 tab. 4.1                         |
| Ut                 | Utilization   |
| Ut <sub>c</sub>    | Weld capacity utilization                                       |

**Buckling**

Buckling analysis was not calculated.

**Code settings**

| Item | Value | Unit | Reference        |
|------|-------|------|------------------|
| YM0  | 1.00  | -    | EN 1993-1-1: 6.1 |
| YM1  | 1.00  | -    | EN 1993-1-1: 6.1 |
| YM2  | 1.25  | -    | EN 1993-1-1: 6.1 |
| YM3  | 1.25  | -    | EN 1993-1-8: 2.2 |

| Item  | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| Yc  | 1.50                   | -    | EN 1992-1-1: 2.4.2.4                                       |
| Y <sub>Inst</sub>                               | 1.20                   | -    | EN 1992-4: Table 4.1                                       |
| Joint coefficient β <sub>j</sub>                | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size         | 0.10                   | -    |  |
| Friction coefficient - concrete                 | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance         | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                            | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                          | Plastic redistribution |      |  |
| Detailing                                       | No                     |      |  |
| Distance between bolts [d]                      | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]             | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check              | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated a <sub>b</sub> in bearing check. | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                                | Yes                    |      | EN 1992-4  |
| Local deformation check                         | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                         | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)                 | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                                   | No                     |      | EN 1993-1-8: 5.2.2.5                                       |


## 5.5. Karakteristično spoj vrha stupa „S2“

### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5711                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

### Beams and columns

| Name  | Cross-section                     | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B5563 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 100            | 0              | 0              | Position  |
| B5568 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 100            | 0              | 0              | Position  |
| B5574 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 100            | 0              | 0              | Position  |
| B6213 | 2 - CHS(cf)355.6/8.0              | 0.0                     | 0.0                  | 0.0                     | 200            | 0              | 0              | Position  |
| B6216 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | -125           | 0              | -250           | Position  |
| B6217 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | -100           | 0              | -250           | Position  |

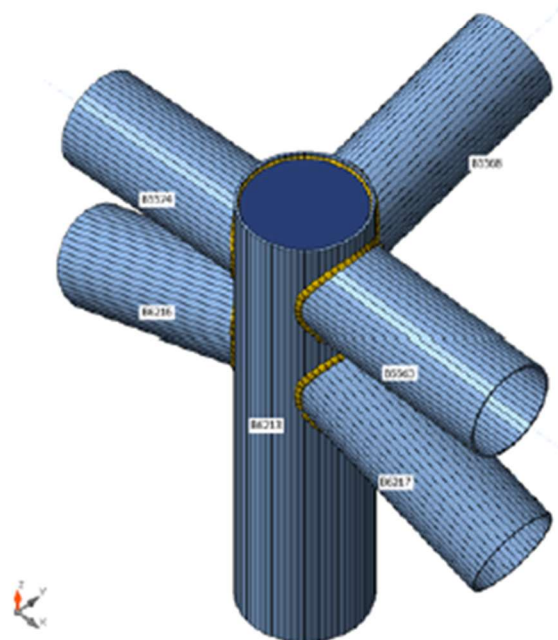

### Cross-sections

| Name                              | Material |
|-----------------------------------|----------|
| 1 - Massive O<br>Hollow(CHS273,8) | S 355    |
| 2 - CHS(cf)355.6/8.0              | S 355    |



## Load effects (forces in equilibrium)

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(1)  | B5563  | 445.7     | 2.3        | -7.4       | -8.5        | 19.3        | 10.2        |
|             | B5568  | 6.6       | 0.5        | -0.8       | -0.3        | -1.0        | 0.8         |
|             | B5574  | 459.3     | -2.7       | -9.0       | 9.1         | 20.9        | -11.4       |
|             | B6213  | -2.8      | -15.2      | -0.8       | 0.8         | 0.0         | -13.2       |
|             | B6216  | 67.3      | 1.9        | 2.7        | -0.9        | 5.1         | -6.3        |
|             | B6217  | 53.0      | -1.7       | 1.9        | 0.4         | 2.9         | 6.0         |
| ULS-Set(2)  | B5563  | 419.4     | 1.9        | -6.2       | -7.0        | 16.5        | 8.6         |
|             | B5568  | -10.6     | 0.1        | -15.1      | -0.5        | 36.6        | 0.4         |
|             | B5574  | 431.4     | -2.0       | -6.7       | 6.9         | 16.5        | -8.8        |
|             | B6213  | 17.0      | -2.5       | 0.1        | 0.1         | 0.4         | -42.5       |
|             | B6216  | 57.6      | 2.4        | 2.0        | 1.4         | 3.7         | -7.8        |
|             | B6217  | 44.7      | -2.4       | 1.9        | -1.4        | 3.4         | 7.7         |
| ULS-Set(5)  | B5563  | 280.3     | 1.9        | -6.9       | -7.2        | 16.7        | 8.7         |
|             | B5568  | 40.6      | 1.2        | 29.3       | 0.2         | -81.5       | 1.5         |
|             | B5574  | 286.1     | -2.9       | -9.1       | 9.2         | 19.7        | -11.4       |
|             | B6213  | -40.3     | -35.5      | -2.3       | 2.0         | -1.4        | 56.6        |
|             | B6216  | 50.3      | -0.2       | 2.1        | -5.4        | 4.7         | 0.1         |
|             | B6217  | 44.9      | 0.7        | 0.2        | 4.0         | 0.0         | -0.4        |
| ULS-Set(8)  | B5563  | 398.4     | 2.1        | -5.5       | -7.8        | 15.6        | 9.1         |
|             | B5568  | 4.8       | 0.5        | -2.0       | -0.3        | 2.5         | 0.8         |
|             | B5574  | 408.9     | -2.4       | -6.2       | 8.2         | 16.1        | -10.2       |
|             | B6213  | -3.1      | -13.1      | -0.8       | 0.8         | -0.5        | -15.0       |
|             | B6216  | 56.9      | 1.8        | 2.6        | -0.6        | 4.6         | -5.8        |
|             | B6217  | 45.9      | -1.6       | 2.1        | 0.1         | 3.2         | 5.5         |
| ULS-Set(9)  | B5563  | 316.9     | 1.6        | -4.1       | -6.0        | 11.9        | 7.0         |
|             | B5568  | -1.1      | 0.3        | -6.1       | -0.3        | 13.2        | 0.5         |
|             | B5574  | 323.3     | -1.8       | -3.9       | 6.1         | 11.2        | -7.6        |
|             | B6213  | 4.2       | -7.1       | -0.5       | 0.5         | -0.6        | -21.0       |
|             | B6216  | 41.5      | 1.6        | 1.7        | 0.2         | 3.0         | -5.2        |
|             | B6217  | 34.9      | -1.5       | 1.6        | -0.5        | 2.7         | 5.0         |
| ULS-Set(18) | B5563  | 426.2     | 2.2        | -6.5       | -8.3        | 17.6        | 9.8         |
|             | B5568  | 5.9       | 0.5        | -1.7       | -0.3        | 0.8         | 0.9         |
|             | B5574  | 436.7     | -2.6       | -7.2       | 8.8         | 18.1        | -11.0       |
|             | B6213  | -2.3      | -14.5      | -0.9       | 0.8         | -0.5        | -14.4       |
|             | B6216  | 60.7      | 1.9        | 2.5        | -0.8        | 4.6         | -6.1        |
|             | B6217  | 49.8      | -1.7       | 1.9        | 0.2         | 3.0         | 5.9         |
| ULS-Set(21) | B5563  | 260.0     | 1.1        | -6.1       | -3.6        | 13.3        | 5.1         |
|             | B5568  | -8.9      | 0.0        | -10.7      | -0.3        | 25.8        | 0.1         |
|             | B5574  | 270.2     | -1.1       | -7.6       | 3.6         | 15.1        | -4.9        |
|             | B6213  | 17.4      | 0.6        | 0.5        | -0.1        | 1.3         | -27.7       |
|             | B6216  | 40.8      | 1.5        | 0.5        | 1.0         | 1.8         | -5.0        |



| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B6217  | 29.5      | -1.5       | 0.3        | -0.9        | 1.1         | 5.0         |
| ULS-Set(23) | B5563  | 310.1     | 1.3        | -3.9       | -4.7        | 10.8        | 5.8         |
|             | B5568  | -17.6     | -0.1       | -19.5      | -0.5        | 49.0        | 0.1         |
|             | B5574  | 318.1     | -1.2       | -3.4       | 4.2         | 9.7         | -5.5        |
|             | B6213  | 23.4      | 4.9        | 0.4        | -0.3        | 0.4         | -49.1       |
|             | B6216  | 38.3      | 2.2        | 1.2        | 2.3         | 2.1         | -6.9        |
|             | B6217  | 29.7      | -2.3       | 1.6        | -2.1        | 3.0         | 6.8         |
| ULS-Set(27) | B5563  | 277.1     | 1.8        | -4.6       | -2.8        | 11.3        | 6.4         |
|             | B5568  | 1.7       | 0.0        | -5.6       | -0.3        | 10.5        | 0.1         |
|             | B5574  | 283.2     | -1.9       | -5.3       | 2.8         | 12.1        | -6.7        |
|             | B6213  | 11.7      | -9.0       | 0.1        | 0.2         | 0.5         | -11.3       |
|             | B6216  | 28.9      | 1.1        | 1.2        | 0.8         | 2.4         | -4.5        |
|             | B6217  | 22.3      | -1.2       | 1.0        | -0.9        | 1.9         | 4.5         |
| ULS-Set(28) | B5563  | 318.9     | 1.6        | -4.7       | -3.6        | 11.9        | 6.3         |
|             | B5568  | -13.6     | -0.2       | -17.5      | -0.5        | 43.1        | -0.1        |
|             | B5574  | 328.2     | -1.5       | -5.1       | 3.1         | 12.1        | -5.9        |
|             | B6213  | 25.0      | 1.4        | 0.7        | -0.3        | 1.1         | -40.9       |
|             | B6216  | 36.9      | 1.9        | 1.2        | 2.3         | 2.3         | -6.7        |
|             | B6217  | 26.6      | -2.1       | 1.5        | -2.1        | 2.8         | 6.7         |
| ULS-Set(29) | B5563  | 346.7     | 1.8        | -5.6       | -4.0        | 13.9        | 7.0         |
|             | B5568  | -12.5     | -0.1       | -17.2      | -0.5        | 41.4        | 0.0         |
|             | B5574  | 356.0     | -1.7       | -6.1       | 3.7         | 14.1        | -6.7        |
|             | B6213  | 25.8      | 0.0        | 0.6        | -0.2        | 1.0         | -40.2       |
|             | B6216  | 40.8      | 2.0        | 1.1        | 2.2         | 2.4         | -7.0        |
|             | B6217  | 30.5      | -2.1       | 1.3        | -2.0        | 2.7         | 7.1         |
| ULS-Set(30) | B5563  | 237.4     | 1.2        | -3.3       | -1.7        | 8.2         | 4.1         |
|             | B5568  | -19.5     | -0.4       | -21.7      | -0.5        | 53.8        | -0.4        |
|             | B5574  | 242.6     | -0.9       | -2.9       | 1.0         | 7.3         | -3.4        |
|             | B6213  | 32.3      | 7.4        | 1.0        | -0.6        | 1.0         | -46.9       |
|             | B6216  | 21.5      | 1.7        | 0.3        | 3.1         | 0.8         | -6.1        |
|             | B6217  | 15.6      | -2.0       | 0.9        | -2.7        | 2.3         | 6.2         |
| ULS-Set(32) | B5563  | 373.0     | 2.1        | -6.9       | -5.5        | 16.7        | 8.6         |
|             | B5568  | 4.7       | 0.3        | -3.0       | -0.3        | 3.8         | 0.4         |
|             | B5574  | 383.8     | -2.4       | -8.4       | 5.8         | 18.5        | -9.3        |
|             | B6213  | 6.1       | -12.8      | -0.2       | 0.5         | 0.6         | -11.0       |
|             | B6216  | 50.5      | 1.5        | 1.8        | -0.1        | 3.8         | -5.5        |
|             | B6217  | 38.9      | -1.4       | 1.3        | -0.2        | 2.2         | 5.4         |
| ULS-Set(33) | B5563  | 265.2     | 1.3        | -4.2       | -2.2        | 10.2        | 4.8         |
|             | B5568  | -18.5     | -0.3       | -21.4      | -0.5        | 52.2        | -0.3        |
|             | B5574  | 270.4     | -1.1       | -3.8       | 1.5         | 9.3         | -4.2        |
|             | B6213  | 33.1      | 6.0        | 0.9        | -0.5        | 0.9         | -46.2       |
|             | B6216  | 25.3      | 1.8        | 0.1        | 3.0         | 0.9         | -6.4        |
|             | B6217  | 19.5      | -2.0       | 0.7        | -2.6        | 2.2         | 6.5         |

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(34) | B5563  | 391.6     | 1.8        | -5.3       | -6.6        | 14.5        | 7.9         |
|             | B5568  | -11.7     | 0.1        | -15.3      | -0.5        | 38.2        | 0.3         |
|             | B5574  | 403.7     | -1.8       | -5.7       | 6.4         | 14.5        | -8.0        |
|             | B6213  | 16.2      | -1.1       | 0.1        | 0.0         | 0.5         | -43.1       |
|             | B6216  | 53.7      | 2.3        | 2.1        | 1.5         | 3.6         | -7.5        |
|             | B6217  | 40.8      | -2.3       | 2.1        | -1.5        | 3.5         | 7.3         |
| ULS-Set(37) | B5563  | 181.7     | 0.8        | -3.1       | -2.1        | 7.3         | 3.2         |
|             | B5568  | -14.8     | -0.8       | -14.6      | -0.2        | 36.2        | -0.9        |
|             | B5574  | 188.0     | -0.4       | -2.8       | 1.2         | 6.6         | -2.3        |
|             | B6213  | 23.8      | 6.5        | 0.6        | -0.5        | 0.7         | -33.5       |
|             | B6216  | 18.2      | 1.3        | -0.2       | 1.9         | 0.3         | -4.3        |
|             | B6217  | 12.1      | -1.5       | 0.6        | -1.4        | 1.7         | 4.5         |
| ULS-Set(38) | B5563  | 229.0     | 0.8        | -3.2       | -2.5        | 8.0         | 3.5         |
|             | B5568  | -25.8     | -0.8       | -24.5      | -0.4        | 62.8        | -0.8        |
|             | B5574  | 236.9     | -0.4       | -2.7       | 1.3         | 6.9         | -2.2        |
|             | B6213  | 35.2      | 13.1       | 1.1        | -0.8        | 1.1         | -56.6       |
|             | B6216  | 24.4      | 2.0        | 0.0        | 3.3         | 0.4         | -6.3        |
|             | B6217  | 16.0      | -2.3       | 1.0        | -2.6        | 2.5         | 6.5         |
| ULS-Set(40) | B5563  | 223.5     | 1.5        | -4.1       | -1.4        | 9.6         | 5.0         |
|             | B5568  | -3.2      | -0.1       | -9.5       | -0.4        | 19.7        | -0.1        |
|             | B5574  | 225.4     | -1.4       | -4.0       | 1.3         | 9.2         | -4.9        |
|             | B6213  | 19.7      | -4.4       | 0.3        | 0.0         | 0.4         | -16.6       |
|             | B6216  | 17.3      | 1.0        | 0.1        | 1.4         | 0.9         | -4.2        |
|             | B6217  | 15.2      | -1.1       | 0.2        | -1.4        | 1.3         | 4.3         |
| ULS-Set(42) | B5563  | 260.8     | 1.8        | -6.0       | -7.0        | 14.9        | 8.3         |
|             | B5568  | 39.8      | 1.1        | 28.5       | 0.1         | -79.6       | 1.5         |
|             | B5574  | 263.5     | -2.8       | -7.3       | 8.9         | 16.8        | -11.0       |
|             | B6213  | -39.8     | -34.8      | -2.5       | 2.1         | -1.9        | 55.4        |
|             | B6216  | 43.7      | -0.2       | 1.9        | -5.2        | 4.2         | 0.2         |
|             | B6217  | 41.7      | 0.7        | 0.2        | 3.8         | 0.1         | -0.6        |
| ULS-Set(48) | B5563  | 338.3     | 1.5        | -5.6       | -4.8        | 13.7        | 6.3         |
|             | B5568  | -18.8     | -0.5       | -20.1      | -0.4        | 50.4        | -0.5        |
|             | B5574  | 350.2     | -1.2       | -6.0       | 4.0         | 13.7        | -5.6        |
|             | B6213  | 28.8      | 5.7        | 0.7        | -0.4        | 1.1         | -49.9       |
|             | B6216  | 43.6      | 2.2        | 0.8        | 2.4         | 2.0         | -7.2        |
|             | B6217  | 31.0      | -2.4       | 1.3        | -2.0        | 2.8         | 7.4         |
| ULS-Set(50) | B5563  | 205.9     | 0.6        | -3.9       | -1.7        | 8.5         | 2.7         |
|             | B5568  | -27.2     | -0.4       | -25.2      | -0.5        | 65.1        | -0.4        |
|             | B5574  | 214.6     | -0.2       | -4.3       | 0.9         | 8.7         | -1.6        |
|             | B6213  | 36.4      | 14.8       | 1.4        | -0.9        | 1.8         | -57.6       |
|             | B6216  | 27.3      | 1.9        | -0.1       | 3.4         | 0.4         | -6.2        |
|             | B6217  | 17.2      | -2.1       | 0.6        | -2.8        | 1.7         | 6.3         |
| ULS-Set(53) | B5563  | 256.9     | 1.0        | -4.2       | -2.9        | 10.0        | 4.2         |

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B5568  | -24.8     | -0.7       | -24.3      | -0.5        | 61.1        | -0.7        |
|             | B5574  | 264.6     | -0.6       | -3.7       | 1.9         | 8.9         | -3.0        |
|             | B6213  | 36.0      | 11.7       | 1.0        | -0.7        | 1.1         | -55.9       |
|             | B6216  | 28.2      | 2.1        | -0.1       | 3.2         | 0.5         | -6.7        |
|             | B6217  | 19.9      | -2.3       | 0.8        | -2.6        | 2.3         | 6.9         |
| ULS-Set(55) | B5563  | 338.0     | 1.5        | -4.8       | -5.2        | 12.7        | 6.4         |
|             | B5568  | -16.6     | 0.0        | -19.2      | -0.5        | 47.4        | 0.1         |
|             | B5574  | 345.8     | -1.4       | -4.4       | 4.8         | 11.7        | -6.3        |
|             | B6213  | 24.2      | 3.5        | 0.4        | -0.2        | 0.3         | -48.4       |
|             | B6216  | 42.1      | 2.3        | 1.0        | 2.2         | 2.1         | -7.2        |
|             | B6217  | 33.6      | -2.3       | 1.4        | -2.0        | 2.9         | 7.1         |
| ULS-Set(56) | B5563  | 417.9     | 2.1        | -6.5       | -8.1        | 17.3        | 9.6         |
|             | B5568  | 5.6       | 0.5        | -1.1       | -0.3        | 0.6         | 0.8         |
|             | B5574  | 431.5     | -2.5       | -8.0       | 8.5         | 18.9        | -10.6       |
|             | B6213  | -3.6      | -13.8      | -0.7       | 0.7         | 0.1         | -13.9       |
|             | B6216  | 63.5      | 1.8        | 2.9        | -0.8        | 5.0         | -5.9        |
|             | B6217  | 49.1      | -1.6       | 2.1        | 0.3         | 3.0         | 5.7         |
| ULS-Set(58) | B5563  | 304.9     | 1.9        | -5.5       | -3.2        | 13.3        | 7.1         |
|             | B5568  | 2.7       | 0.1        | -5.4       | -0.4        | 8.9         | 0.1         |
|             | B5574  | 311.0     | -2.1       | -6.3       | 3.4         | 14.1        | -7.5        |
|             | B6213  | 12.5      | -10.4      | 0.0        | 0.3         | 0.5         | -10.7       |
|             | B6216  | 32.7      | 1.2        | 1.0        | 0.6         | 2.5         | -4.8        |
|             | B6217  | 26.2      | -1.2       | 0.8        | -0.8        | 1.8         | 4.9         |

## Check

### Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.4 < 5.0%     | OK     |
| Welds    | 98.1 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

## Plates


| Name   | Thickness [mm] | Loads       | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|--------|----------------|-------------|---------------------|---------------------|----------------------|--------|
| B5563  | 8.0            | ULS-Set(38) | 340.2               | 0.0                 | 0.0                  | OK     |
| B5568  | 8.0            | ULS-Set(5)  | 317.1               | 0.0                 | 0.0                  | OK     |
| B5574  | 8.0            | ULS-Set(38) | 308.1               | 0.0                 | 0.0                  | OK     |
| B6213  | 8.0            | ULS-Set(2)  | 355.9               | 0.4                 | 0.0                  | OK     |
| B6216  | 8.0            | ULS-Set(2)  | 129.2               | 0.0                 | 0.0                  | OK     |
| B6217  | 8.0            | ULS-Set(2)  | 144.4               | 0.0                 | 0.0                  | OK     |
| STIFF1 | 12.0           | ULS-Set(1)  | 241.7               | 0.0                 | 0.0                  | OK     |

## Design data


| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |

## Symbol explanation


|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |

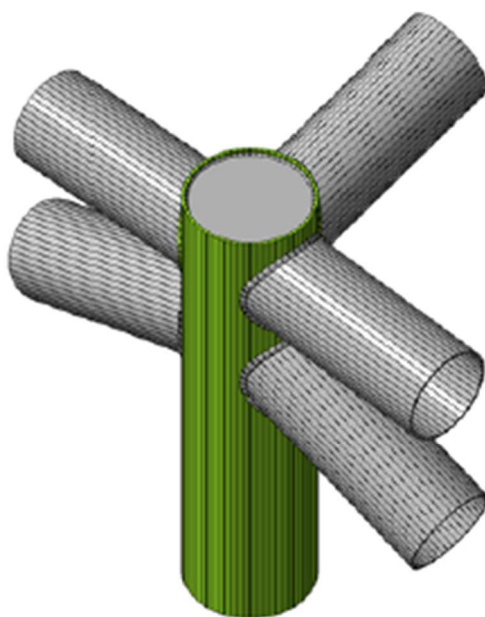

Overall check, ULS-Set(2)

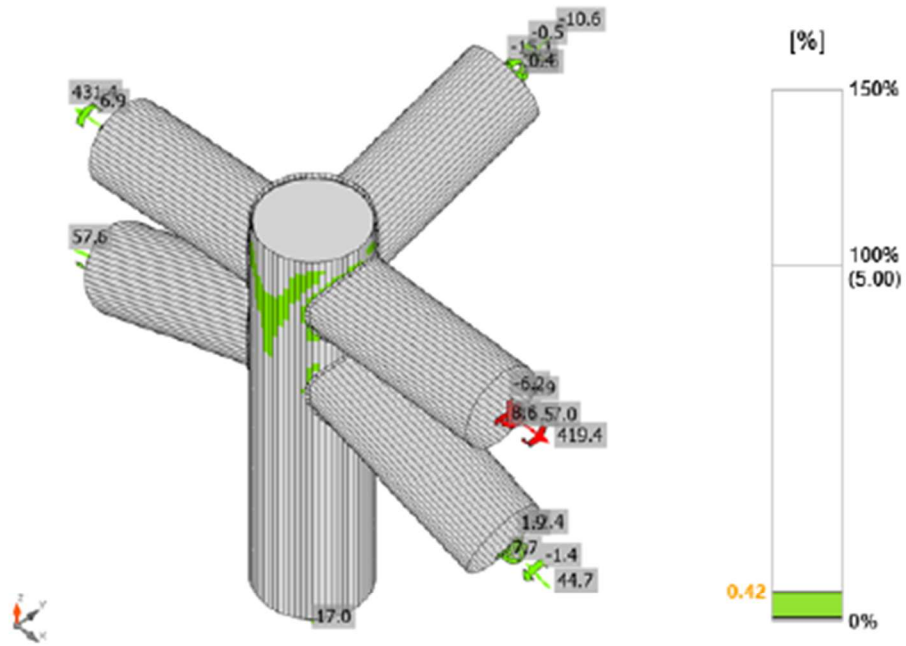

Strain check, ULS-Set(2)

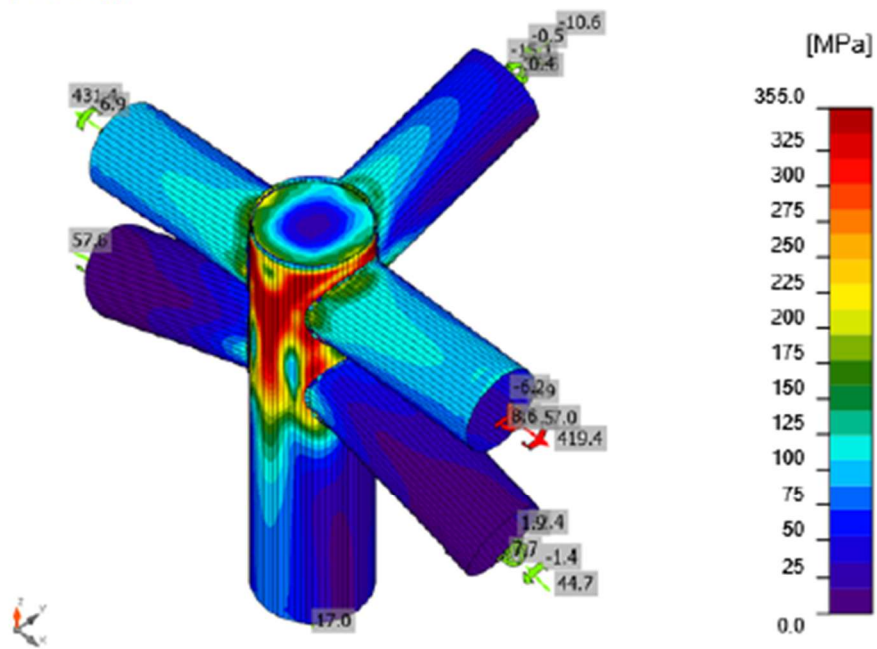

Equivalent stress, ULS-Set(2)



## Welds (Plastic redistribution)

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B5568-arc 27 | B5563  | ▲8.0            | 68          | ULS-Set(38) | 426.9                 | 0.0                 | 65.4                   | 185.1                    | -158.3               | 98.0   | 46.0                | OK     |
| B6213-arc 56 | B5563  | ▲8.0            | 755         | ULS-Set(38) | 313.3                 | 0.0                 | 113.5                  | -153.5                   | -69.7                | 71.9   | 14.6                | OK     |
| B6213-arc 25 | B5574  | ▲8.0            | 861         | ULS-Set(1)  | 308.8                 | 0.0                 | 202.0                  | 46.7                     | -126.5               | 70.9   | 24.0                | OK     |
| B6213-arc 25 | B6216  | ▲8.0            | 886         | ULS-Set(2)  | 196.4                 | 0.0                 | 118.4                  | -1.4                     | -90.4                | 45.1   | 11.9                | OK     |
| B6213-arc 40 | B6217  | ▲8.0            | 886         | ULS-Set(2)  | 126.2                 | 0.0                 | 122.9                  | 8.7                      | -14.0                | 34.8   | 10.4                | OK     |
| B5574-arc 24 | B5568  | ▲8.0            | 68          | ULS-Set(38) | 427.2                 | 0.2                 | -164.8                 | -149.4                   | 171.6                | 98.1   | 51.0                | OK     |
| B6213-arc 2  | B5568  | ▲8.0            | 770         | ULS-Set(5)  | 427.0                 | 0.1                 | -200.8                 | -21.9                    | 216.5                | 98.0   | 35.8                | OK     |
| B6213-arc 1  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5)  | 417.6                 | 0.0                 | -242.9                 | -7.2                     | -196.0               | 95.9   | 95.9                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5)  | 270.9                 | 0.0                 | -93.8                  | -27.7                    | 144.1                | 62.2   | 62.2                | OK     |
| B6213-arc 2  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5)  | 426.9                 | 0.0                 | -223.5                 | -28.8                    | -208.0               | 98.0   | 98.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5)  | 377.0                 | 0.0                 | -168.2                 | -40.5                    | 190.6                | 86.6   | 86.6                | OK     |
| B6213-arc 3  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5)  | 377.6                 | 0.0                 | -141.0                 | -88.2                    | -182.0               | 86.7   | 86.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5)  | 426.9                 | 0.0                 | -237.1                 | 6.3                      | 204.9                | 98.0   | 98.0                | OK     |
| B6213-arc 4  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5)  | 244.4                 | 0.0                 | -62.8                  | -95.2                    | -97.6                | 56.1   | 56.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5)  | 349.6                 | 0.0                 | -188.8                 | 67.0                     | 156.1                | 80.3   | 80.3                | OK     |
| B6213-arc 5  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5)  | 89.7                  | 0.0                 | 3.8                    | -49.2                    | -16.1                | 20.6   | 20.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5)  | 181.0                 | 0.0                 | -86.0                  | 61.7                     | 68.2                 | 41.6   | 41.6                | OK     |
| B6213-arc 6  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(1)  | 76.5                  | 0.0                 | 1.6                    | -44.1                    | 2.5                  | 17.6   | 17.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5)  | 142.7                 | 0.0                 | -63.9                  | 53.8                     | 50.3                 | 32.8   | 32.8                | OK     |
| B6213-arc 7  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(1)  | 94.8                  | 0.0                 | 3.2                    | -54.6                    | 3.1                  | 21.8   | 21.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1)  | 124.0                 | 0.0                 | -12.1                  | 70.2                     | 12.0                 | 28.5   | 28.5                | OK     |
| B6213-arc 8  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2)  | 118.1                 | 0.0                 | -1.6                   | -68.1                    | -4.0                 | 27.1   | 27.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1)  | 141.0                 | 0.0                 | -18.1                  | 79.2                     | 15.6                 | 32.4   | 32.4                | OK     |
| B6213-arc 9  | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2)  | 122.1                 | 0.0                 | 6.1                    | -70.2                    | -4.5                 | 28.0   | 28.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 163.0                 | 0.0                 | -27.4                  | 91.2                     | 17.1                 | 37.4   | 37.4                | OK     |
| B6213-arc 10 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2)  | 129.8                 | 0.0                 | 6.7                    | -74.8                    | -1.9                 | 29.8   | 29.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 180.2                 | 0.0                 | -20.7                  | 102.6                    | 12.4                 | 41.4   | 41.4                | OK     |
| B6213-arc 11 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2)  | 133.3                 | 0.0                 | 6.9                    | -76.8                    | -1.2                 | 30.6   | 30.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 202.5                 | 0.0                 | -12.7                  | 116.5                    | 5.3                  | 46.5   | 46.5                | OK     |
| B6213-arc 12 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2)  | 135.7                 | 0.0                 | 1.3                    | -78.2                    | -5.0                 | 31.2   | 31.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 216.2                 | 0.0                 | -0.4                   | 124.7                    | -4.7                 | 49.6   | 49.6                | OK     |
| B6213-arc 13 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2)  | 118.5                 | 0.0                 | -0.8                   | -68.2                    | -5.6                 | 27.2   | 27.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 212.8                 | 0.0                 | 14.2                   | 121.4                    | -16.8                | 48.9   | 48.9                | OK     |
| B6213-arc 14 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(48) | 106.4                 | 0.0                 | -13.2                  | -60.4                    | -8.1                 | 24.4   | 24.4                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 218.3                 | 0.0                 | 54.4                   | 113.6                    | -44.7                | 50.1   | 50.1                | OK     |
| B6213-arc 15 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(53) | 100.2                 | 0.0                 | -11.3                  | -56.7                    | -9.8                 | 23.0   | 23.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 212.5                 | 0.0                 | 68.1                   | 99.1                     | -60.6                | 48.8   | 48.8                | OK     |
| B6213-arc 16 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5)  | 84.8                  | 0.0                 | -14.0                  | 48.2                     | -3.5                 | 19.5   | 19.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2)  | 200.4                 | 0.0                 | 86.8                   | 76.4                     | -71.0                | 46.0   | 46.0                | OK     |

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6213-arc 17 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 105.6                 | 0.0                 | -20.3                  | 59.7                     | -3.8                 | 24.2   | 24.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(2) | 185.3                 | 0.0                 | 102.2                  | 45.8                     | -76.6                | 42.5   | 42.5                | OK     |
| B6213-arc 18 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 128.2                 | 0.0                 | -22.7                  | 71.4                     | -14.1                | 29.4   | 29.4                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 188.1                 | 0.0                 | 105.8                  | -13.8                    | -88.8                | 43.2   | 43.2                | OK     |
| B6213-arc 19 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 139.3                 | 0.0                 | -18.3                  | 79.5                     | -5.9                 | 32.0   | 32.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 176.8                 | 0.0                 | 52.5                   | -88.9                    | -40.0                | 40.6   | 40.6                | OK     |
| B6213-arc 20 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 158.2                 | 0.0                 | -17.5                  | 89.8                     | -13.3                | 36.3   | 36.3                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 196.9                 | 0.0                 | 79.3                   | -78.3                    | -68.6                | 45.2   | 45.2                | OK     |
| B6213-arc 21 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 163.0                 | 0.0                 | -22.4                  | 91.4                     | -18.1                | 37.4   | 37.4                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 223.2                 | 0.0                 | 75.2                   | -103.0                   | -64.1                | 51.2   | 51.2                | OK     |
| B6213-arc 22 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 163.3                 | 0.0                 | -13.6                  | 93.6                     | -8.7                 | 37.5   | 37.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 222.3                 | 0.0                 | 51.4                   | -118.6                   | -38.9                | 51.0   | 51.0                | OK     |
| B6213-arc 23 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 147.0                 | 0.0                 | -11.1                  | 84.2                     | -8.0                 | 33.7   | 33.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 243.7                 | 0.0                 | 40.7                   | -135.1                   | -31.4                | 56.0   | 56.0                | OK     |
| B6213-arc 24 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 137.1                 | 0.0                 | -7.4                   | 78.8                     | -6.1                 | 31.5   | 31.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 236.0                 | 0.0                 | 18.6                   | -135.4                   | -11.1                | 54.2   | 54.2                | OK     |
| B6213-arc 25 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 122.3                 | 0.0                 | -6.9                   | 69.6                     | -11.1                | 28.1   | 28.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 244.3                 | 0.0                 | 4.1                    | -141.0                   | -4.3                 | 56.1   | 56.1                | OK     |
| B6213-arc 26 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 106.5                 | 0.0                 | -0.6                   | 61.3                     | -4.4                 | 24.5   | 24.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 239.3                 | 0.0                 | -14.1                  | -137.1                   | 15.1                 | 54.9   | 54.9                | OK     |
| B6213-arc 27 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 92.0                  | 0.0                 | 2.5                    | 53.1                     | -1.0                 | 21.1   | 21.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 220.2                 | 0.0                 | -31.2                  | -122.0                   | 30.9                 | 50.6   | 50.6                | OK     |
| B6213-arc 28 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 77.0                  | 0.0                 | 0.4                    | 43.7                     | -8.0                 | 17.7   | 17.7                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 214.3                 | 0.0                 | -46.8                  | -115.0                   | 36.9                 | 49.2   | 49.2                | OK     |
| B6213-arc 29 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 63.0                  | 0.0                 | 4.1                    | 36.1                     | -3.9                 | 14.5   | 14.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 195.0                 | 0.0                 | -59.6                  | -94.4                    | 50.9                 | 44.8   | 44.8                | OK     |
| B6213-arc 30 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 51.3                  | 0.0                 | 33.2                   | 6.6                      | 21.6                 | 11.8   | 11.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 181.7                 | 0.0                 | -72.8                  | -68.4                    | 67.5                 | 41.7   | 41.7                | OK     |
| B6213-arc 31 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 50.0                  | 0.0                 | 39.0                   | 4.2                      | 17.6                 | 11.5   | 11.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 169.7                 | 0.0                 | -84.8                  | -46.3                    | 71.2                 | 39.0   | 39.0                | OK     |
| B6213-arc 32 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 49.7                  | 0.0                 | 39.3                   | 1.1                      | 17.6                 | 11.4   | 11.4                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 151.9                 | 0.0                 | -84.0                  | -18.4                    | 70.7                 | 34.9   | 34.9                | OK     |
| B6213-arc 33 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 55.0                  | 0.0                 | 43.1                   | -1.9                     | 19.7                 | 12.6   | 12.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 158.8                 | 0.0                 | -89.6                  | 10.9                     | 74.9                 | 36.5   | 36.5                | OK     |
| B6213-arc 34 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 44.7                  | 0.0                 | 33.8                   | -0.7                     | 16.9                 | 10.3   | 10.3                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 156.5                 | 0.0                 | -77.5                  | 38.6                     | 68.3                 | 35.9   | 35.9                | OK     |
| B6213-arc 35 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 57.2                  | 0.0                 | 37.6                   | -7.5                     | 23.7                 | 13.1   | 13.1                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 181.0                 | 0.0                 | -79.0                  | 60.8                     | 71.8                 | 41.6   | 41.6                | OK     |
| B6213-arc 36 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 53.6                  | 0.0                 | 0.7                    | -30.2                    | -6.9                 | 12.3   | 12.3                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 182.3                 | 0.0                 | -61.5                  | 84.8                     | 51.1                 | 41.8   | 41.8                | OK     |
| B6213-arc 37 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 70.2                  | 0.0                 | 1.7                    | -40.5                    | -2.6                 | 16.1   | 16.1                | OK     |



| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
|              |        | 4.0             | 17          | ULS-Set(1)  | 200.5                 | 0.0                 | -44.0                  | 105.2                    | 41.0                 | 46.0   | 46.0                | OK     |
| B6213-arc 38 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 85.3                  | 0.0                 | 0.4                    | -49.0                    | -4.4                 | 19.6   | 19.6                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 219.8                 | 0.0                 | -38.8                  | 120.0                    | 34.8                 | 50.5   | 50.5                | OK     |
| B6213-arc 39 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 106.2                 | 0.0                 | -2.8                   | -60.9                    | -6.8                 | 24.4   | 24.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 217.6                 | 0.0                 | -9.1                   | 125.2                    | 9.4                  | 50.0   | 50.0                | OK     |
| B6213-arc 40 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 119.5                 | 0.0                 | -2.1                   | -68.8                    | -5.4                 | 27.4   | 27.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 239.9                 | 0.0                 | -2.1                   | 138.4                    | 4.1                  | 55.1   | 55.1                | OK     |
| B6213-arc 41 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 137.9                 | 0.0                 | -7.0                   | -79.0                    | -9.4                 | 31.7   | 31.7                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 233.5                 | 0.0                 | 14.1                   | 134.2                    | -9.9                 | 53.6   | 53.6                | OK     |
| B6213-arc 42 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 145.4                 | 0.0                 | -8.0                   | -83.5                    | -7.7                 | 33.4   | 33.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 240.4                 | 0.0                 | 33.9                   | 135.1                    | -25.3                | 55.2   | 55.2                | OK     |
| B6213-arc 43 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 162.6                 | 0.0                 | -10.6                  | -93.3                    | -7.9                 | 37.3   | 37.3                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 223.4                 | 0.0                 | 46.9                   | 121.2                    | -34.8                | 51.3   | 51.3                | OK     |
| B6213-arc 44 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 168.8                 | 0.0                 | -17.6                  | -95.6                    | -16.0                | 38.8   | 38.8                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 228.2                 | 0.0                 | 69.0                   | 111.0                    | -58.6                | 52.4   | 52.4                | OK     |
| B6213-arc 45 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 158.8                 | 0.0                 | -12.5                  | -90.7                    | -11.5                | 36.5   | 36.5                | OK     |
|              |        | 4.0             | 17          | ULS-Set(5)  | 194.5                 | 0.0                 | 27.2                   | 108.7                    | -23.2                | 44.7   | 44.7                | OK     |
| B6213-arc 46 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 149.8                 | 0.0                 | -16.2                  | -85.8                    | -6.1                 | 34.4   | 34.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(5)  | 188.8                 | 0.0                 | 53.2                   | 96.8                     | -39.6                | 43.3   | 43.3                | OK     |
| B6213-arc 47 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 150.3                 | 0.0                 | -20.7                  | -84.5                    | -15.6                | 34.5   | 34.5                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 203.1                 | 0.0                 | 112.1                  | 22.3                     | -95.2                | 46.6   | 46.6                | OK     |
| B6213-arc 48 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 114.9                 | 0.0                 | -15.3                  | -65.5                    | -5.4                 | 26.4   | 26.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 173.7                 | 0.0                 | 97.9                   | -37.1                    | -74.1                | 39.9   | 39.9                | OK     |
| B6213-arc 49 | STIFF1 | 4.0             | 17          | ULS-Set(5)  | 97.3                  | 0.0                 | -15.7                  | -55.3                    | -3.8                 | 22.3   | 22.3                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 202.4                 | 0.0                 | 98.4                   | -69.4                    | -74.9                | 46.5   | 46.5                | OK     |
| B6213-arc 50 | STIFF1 | 4.0             | 17          | ULS-Set(53) | 100.9                 | 0.0                 | -15.5                  | 55.8                     | -14.2                | 23.2   | 23.2                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 207.4                 | 0.0                 | 71.0                   | -92.4                    | -64.2                | 47.6   | 47.6                | OK     |
| B6213-arc 51 | STIFF1 | 4.0             | 17          | ULS-Set(48) | 110.6                 | 0.0                 | -11.1                  | 63.1                     | -7.7                 | 25.4   | 25.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 217.4                 | 0.0                 | 45.8                   | -116.6                   | -38.2                | 49.9   | 49.9                | OK     |
| B6213-arc 52 | STIFF1 | 4.0             | 17          | ULS-Set(2)  | 121.9                 | 0.0                 | -1.1                   | 70.2                     | -4.6                 | 28.0   | 28.0                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 218.4                 | 0.0                 | 18.1                   | -124.1                   | -19.6                | 50.1   | 50.1                | OK     |
| B6213-arc 53 | STIFF1 | 4.0             | 17          | ULS-Set(2)  | 130.7                 | 0.0                 | -1.7                   | 74.8                     | -9.4                 | 30.0   | 30.0                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 216.2                 | 0.0                 | 4.5                    | -124.3                   | -11.0                | 49.6   | 49.6                | OK     |
| B6213-arc 54 | STIFF1 | 4.0             | 17          | ULS-Set(2)  | 136.7                 | 0.0                 | 5.9                    | 78.8                     | -0.8                 | 31.4   | 31.4                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 204.2                 | 0.0                 | -11.5                  | -117.6                   | 5.3                  | 46.9   | 46.9                | OK     |
| B6213-arc 55 | STIFF1 | 4.0             | 17          | ULS-Set(2)  | 132.0                 | 0.0                 | 8.3                    | 76.0                     | -0.8                 | 30.3   | 30.3                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 183.0                 | 0.0                 | -18.8                  | -104.6                   | 10.0                 | 42.0   | 42.0                | OK     |
| B6213-arc 56 | STIFF1 | 4.0             | 17          | ULS-Set(2)  | 122.0                 | 0.0                 | 5.1                    | 70.2                     | -4.0                 | 28.0   | 28.0                | OK     |
|              |        | 4.0             | 17          | ULS-Set(2)  | 161.8                 | 0.0                 | -23.9                  | -91.2                    | 14.9                 | 37.1   | 37.1                | OK     |
| B6213-arc 57 | STIFF1 | 4.0             | 17          | ULS-Set(2)  | 113.1                 | 0.0                 | 0.9                    | 65.3                     | -2.9                 | 26.0   | 26.0                | OK     |
|              |        | 4.0             | 17          | ULS-Set(1)  | 141.1                 | 0.0                 | -14.0                  | -80.3                    | 10.7                 | 32.4   | 32.4                | OK     |



.....

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | U <sub>tc</sub> [%] | Status |
|--------------|--------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6213-arc 58 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(2) | 98.3                  | 0.0                 | -4.2                   | 56.4                     | -5.3                 | 22.6   | 22.6                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 130.4                 | 0.0                 | -8.9                   | -74.6                    | 9.0                  | 29.9   | 29.9                | OK     |
| B6213-arc 59 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(1) | 80.4                  | 0.0                 | 0.8                    | 46.1                     | 5.8                  | 18.5   | 18.5                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(1) | 118.9                 | 0.0                 | -8.5                   | -67.6                    | 11.7                 | 27.3   | 27.3                | OK     |
| B6213-arc 60 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 92.2                  | 0.0                 | 7.3                    | 50.1                     | -17.4                | 21.2   | 21.2                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 166.9                 | 0.0                 | -80.9                  | -62.6                    | 56.4                 | 38.3   | 38.3                | OK     |
| B6213-arc 61 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 226.5                 | 0.0                 | -40.5                  | 99.9                     | -81.1                | 52.0   | 52.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 295.7                 | 0.0                 | -164.8                 | -67.6                    | 124.6                | 67.9   | 67.9                | OK     |
| B6213-arc 62 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 382.3                 | 0.0                 | -153.4                 | 96.5                     | -177.6               | 87.8   | 87.8                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 383.7                 | 0.0                 | -206.8                 | -33.1                    | 183.6                | 88.1   | 88.1                | OK     |
| B6213-arc 63 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 426.8                 | 0.0                 | -228.3                 | 40.4                     | -204.3               | 98.0   | 98.0                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 360.5                 | 0.0                 | -158.5                 | 26.0                     | 185.1                | 82.8   | 82.8                | OK     |
| B6213-arc 64 | STIFF1 | ▲4.0▲           | 17          | ULS-Set(5) | 383.0                 | 0.0                 | -221.0                 | 19.6                     | -179.6               | 87.9   | 87.9                | OK     |
|              |        | ▲4.0▲           | 17          | ULS-Set(5) | 279.8                 | 0.0                 | -105.0                 | 6.6                      | 149.6                | 64.2   | 64.2                | OK     |

#### Design data

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | 0.9 $\sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

#### Symbol explanation

|                    |  |
|--------------------|--|
| $\epsilon_{pl}$    | Strain   |
| $\sigma_{w,Ed}$    | Equivalent stress  |
| $\sigma_{w,Rd}$    | Equivalent stress resistance   |
| $\sigma_{\perp}$   | Perpendicular stress   |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis   |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis                                      |
| 0.9 $\sigma$       | Perpendicular stress resistance - 0.9 $\cdot$ f <sub>u</sub> / $\gamma_{M2}$ |
| $\beta_w$          | Correlation factor EN 1993-1-8 tab. 4.1                                      |
| Ut                 | Utilization  |
| U <sub>tc</sub>    | Weld capacity utilization  |

#### Buckling

Buckling analysis was not calculated.

#### Code settings

| Item            | Value | Unit | Reference            |
|-----------------|-------|------|----------------------|
| Y <sub>M0</sub> | 1.00  | -    | EN 1993-1-1: 6.1     |
| Y <sub>M1</sub> | 1.00  | -    | EN 1993-1-1: 6.1     |
| Y <sub>M2</sub> | 1.25  | -    | EN 1993-1-1: 6.1     |
| Y <sub>M3</sub> | 1.25  | -    | EN 1993-1-8: 2.2     |
| Y <sub>C</sub>  | 1.50  | -    | EN 1992-1-1: 2.4.2.4 |

| Item                                    | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| Yinst                                   | 1.20                   | -    | EN 1992-4: Table 4.1                                       |
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size | 0.10                   | -    |  |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                  | Plastic redistribution |      |  |
| Detailing                               | No                     |      |  |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated $a_b$ in bearing check.  | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                        | Yes                    |      | EN 1992-4  |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)         | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                           | No                     |      | EN 1993-1-8: 5.2.2.5                                       |


## 5.6. Spoj vrha stupa „S3“

### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5920                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

### Beams and columns

| Name  | Cross-section                     | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B6227 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B6229 | 2 - CHS(cf)355.6/8.0              | 0.0                     | 0.0                  | 0.0                     | 150            | 0              | 0              | Position  |
| B6230 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | -150           | 0              | -200           | Position  |
| B6235 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | -25            | 0              | Position  |
| B6240 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 300            | -10            | -100           | Position  |

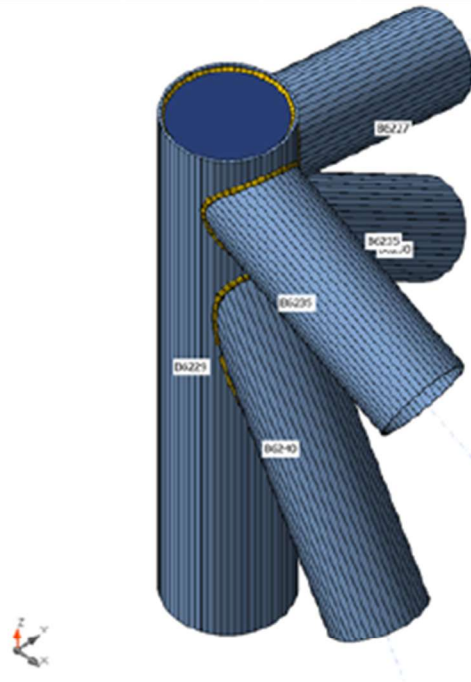

### Cross-sections

| Name                              | Material |
|-----------------------------------|----------|
| 1 - Massive O<br>Hollow(CHS273,8) | S 355    |
| 2 - CHS(cf)355.6/8.0              | S 355    |

## Load effects (forces in equilibrium)

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(12) | B6227  | 6.4       | 0.2        | -2.5       | -1.3        | 2.9         | 1.2         |
|             | B6229  | 105.7     | 0.2        | 2.4        | 0.1         | 15.8        | -0.9        |
|             | B6230  | 6.3       | 1.4        | -1.4       | 0.4         | -0.8        | -3.3        |
|             | B6235  | -86.3     | -0.1       | -3.3       | 1.6         | 3.0         | 0.5         |
|             | B6240  | 160.0     | 0.2        | 6.3        | -0.4        | -15.6       | 1.4         |
| ULS-Set(13) | B6227  | 4.2       | 0.2        | -2.0       | -1.3        | 2.7         | 1.2         |
|             | B6229  | 106.4     | 0.3        | 2.6        | -0.2        | 17.0        | -1.4        |
|             | B6230  | 4.2       | 1.3        | -1.5       | 0.5         | -1.7        | -3.0        |
|             | B6235  | -87.8     | -0.1       | -2.5       | 1.6         | 1.9         | 0.6         |
|             | B6240  | 162.2     | 0.3        | 6.6        | -0.3        | -15.7       | 1.7         |
| ULS-Set(14) | B6227  | 0.1       | 0.6        | -1.8       | -0.4        | 1.9         | 2.6         |
|             | B6229  | 115.7     | 0.6        | -8.6       | 0.7         | -9.1        | -3.2        |
|             | B6230  | -2.7      | 0.4        | -2.1       | -2.0        | -2.2        | 2.9         |
|             | B6235  | -99.3     | -1.0       | -2.5       | 1.8         | 5.3         | -3.4        |
|             | B6240  | 171.9     | -0.3       | 1.9        | 0.9         | 0.3         | 0.2         |
| ULS-Set(16) | B6227  | 6.4       | 0.3        | -1.6       | 0.7         | -1.5        | 0.9         |
|             | B6229  | -72.3     | -0.8       | -3.1       | 3.8         | -21.1       | 2.7         |
|             | B6230  | 3.9       | 0.3        | 1.3        | -2.2        | 7.0         | 1.4         |
|             | B6235  | 68.2      | -1.0       | -1.9       | -1.2        | 2.3         | -3.2        |
|             | B6240  | -121.0    | -1.7       | -8.0       | 0.1         | 15.3        | -4.0        |
| ULS-Set(17) | B6227  | 1.8       | 0.8        | -2.1       | -1.8        | 1.1         | 3.2         |
|             | B6229  | 100.5     | 0.2        | 1.3        | 2.6         | 9.2         | -1.7        |
|             | B6230  | -1.6      | 1.8        | -1.4       | -1.9        | 0.4         | -2.0        |
|             | B6235  | -76.4     | -1.1       | -2.0       | 0.8         | -1.0        | -2.8        |
|             | B6240  | 145.0     | -0.8       | 2.5        | 0.2         | -7.4        | -0.7        |
| ULS-Set(19) | B6227  | 13.4      | -0.2       | -1.5       | -0.3        | -3.5        | 0.3         |
|             | B6229  | 95.3      | -2.6       | 0.8        | 1.1         | 6.5         | 14.7        |
|             | B6230  | 15.0      | 2.6        | 5.3        | -0.6        | 15.6        | -4.3        |
|             | B6235  | -84.2     | 0.0        | -2.9       | 0.4         | 2.4         | 1.8         |
|             | B6240  | 156.9     | -1.2       | 2.2        | -3.3        | -6.5        | -4.5        |
| ULS-Set(20) | B6227  | 11.2      | -0.6       | -1.5       | 1.9         | 0.0         | -2.3        |
|             | B6229  | -108.9    | -0.9       | -2.6       | 0.3         | -18.7       | 4.1         |
|             | B6230  | 13.3      | -0.8       | 1.8        | 0.9         | 6.0         | 1.0         |
|             | B6235  | 90.8      | 0.4        | -2.9       | -0.7        | 7.4         | 1.1         |
|             | B6240  | -167.3    | -0.4       | -5.4       | -0.6        | 10.1        | -1.7        |
| ULS-Set(21) | B6227  | 7.1       | -0.2       | -1.3       | 2.8         | -0.8        | -0.8        |
|             | B6229  | -99.6     | -0.6       | -13.8      | 1.3         | -44.8       | 2.2         |
|             | B6230  | 6.4       | -1.6       | 1.2        | -1.5        | 5.6         | 6.9         |
|             | B6235  | 79.3      | -0.5       | -2.8       | -0.4        | 10.8        | -2.9        |
|             | B6240  | -157.5    | -1.0       | -10.1      | 0.6         | 26.2        | -3.2        |
| ULS-Set(23) | B6227  | 0.8       | 0.5        | -1.7       | 1.0         | 1.5         | 2.1         |

| Name        | Member | N [kN] | Vy [kN] | Vz [kN] | Mx [kNm] | My [kNm] | Mz [kNm] |
|-------------|--------|--------|---------|---------|----------|----------|----------|
|             | B6229  | 81.7   | 0.5     | -16.7   | 0.4      | -30.9    | -3.0     |
|             | B6230  | -2.2   | -0.6    | -1.8    | -2.5     | -1.3     | 7.1      |
|             | B6235  | -76.1  | -1.1    | -3.1    | 1.8      | 10.4     | -4.6     |
|             | B6240  | 120.0  | -0.5    | -2.1    | 1.4      | 12.8     | -0.6     |
| ULS-Set(24) | B6227  | 9.9    | 0.0     | -0.8    | -0.6     | -4.0     | 0.8      |
|             | B6229  | 92.5   | -2.4    | 0.7     | 1.4      | 6.1      | 13.8     |
|             | B6230  | 10.6   | 2.3     | 5.1     | -1.0     | 14.5     | -3.5     |
|             | B6235  | -81.1  | -0.2    | -1.8    | 0.3      | 0.2      | 0.9      |
|             | B6240  | 151.5  | -1.3    | 1.6     | -3.0     | -4.7     | -4.6     |
| ULS-Set(25) | B6227  | 12.1   | 0.0     | -1.4    | -0.5     | -3.8     | 0.8      |
|             | B6229  | 91.8   | -2.5    | 0.6     | 1.7      | 4.9      | 14.2     |
|             | B6230  | 12.7   | 2.5     | 5.2     | -1.1     | 15.5     | -3.7     |
|             | B6235  | -79.7  | -0.3    | -2.5    | 0.3      | 1.3      | 0.8      |
|             | B6240  | 149.3  | -1.5    | 1.3     | -3.1     | -4.6     | -4.9     |
| ULS-Set(28) | B6227  | 2.3    | 0.6     | -2.3    | -0.4     | 2.1      | 2.7      |
|             | B6229  | 115.0  | 0.4     | -8.8    | 1.1      | -10.3    | -2.8     |
|             | B6230  | -0.7   | 0.6     | -2.0    | -2.0     | -1.2     | 2.7      |
|             | B6235  | -97.9  | -1.0    | -3.3    | 1.9      | 6.4      | -3.5     |
|             | B6240  | 169.7  | -0.5    | 1.6     | 0.8      | 0.4      | -0.1     |
| ULS-Set(30) | B6227  | 6.7    | 0.0     | -1.1    | 1.4      | -1.8     | -0.3     |
|             | B6229  | -114.1 | -0.9    | -3.7    | 2.9      | -25.3    | 3.4      |
|             | B6230  | 5.5    | -0.4    | 1.8     | -1.4     | 7.2      | 2.2      |
|             | B6235  | 100.7  | -0.6    | -1.5    | -1.4     | 3.3      | -2.2     |
|             | B6240  | -182.2 | -1.4    | -9.2    | 0.0      | 18.3     | -3.8     |
| ULS-Set(31) | B6227  | 8.8    | 0.0     | -1.7    | 1.4      | -1.6     | -0.3     |
|             | B6229  | -114.8 | -1.0    | -3.9    | 3.2      | -26.5    | 3.8      |
|             | B6230  | 7.5    | -0.2    | 1.9     | -1.5     | 8.2      | 2.0      |
|             | B6235  | 102.1  | -0.7    | -2.3    | -1.4     | 4.4      | -2.3     |
|             | B6240  | -184.4 | -1.6    | -9.5    | -0.1     | 18.4     | -4.1     |
| ULS-Set(32) | B6227  | 7.0    | 0.1     | -1.3    | -1.2     | -1.1     | 1.3      |
|             | B6229  | 125.7  | -1.2    | 2.1     | 0.7      | 14.7     | 7.3      |
|             | B6230  | 7.2    | 2.3     | 2.2     | -0.5     | 7.4      | -4.0     |
|             | B6235  | -106.9 | -0.2    | -2.1    | 1.0      | 0.3      | 0.9      |
|             | B6240  | 198.3  | -0.6    | 5.0     | -2.0     | -12.1    | -1.8     |
| ULS-Set(33) | B6227  | 2.1    | 0.3     | -1.8    | 1.2      | 1.8      | 1.6      |
|             | B6229  | 85.2   | 0.4     | -16.4   | -0.2     | -29.3    | -2.4     |
|             | B6230  | 0.1    | -0.5    | -1.6    | -2.0     | -1.2     | 6.5      |
|             | B6235  | -80.7  | -0.8    | -3.5    | 2.0      | 11.4     | -3.6     |
|             | B6240  | 127.6  | -0.2    | -1.2    | 1.2      | 10.9     | -0.2     |
| ULS-Set(34) | B6227  | 1.5    | 0.4     | -1.9    | -0.3     | 2.2      | 2.1      |
|             | B6229  | 119.2  | 0.5     | -8.4    | 0.1      | -7.5     | -2.7     |
|             | B6230  | -0.5   | 0.5     | -2.0    | -1.4     | -2.1     | 2.4      |
|             | B6235  | -103.9 | -0.7    | -2.9    | 2.0      | 6.4      | -2.4     |



| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
|             | B0240  | 179.4     | -0.1       | 2.8        | 0.7         | -1.6        | 0.6         |
| ULS-Set(35) | B0227  | 9.3       | -0.2       | -1.9       | 2.8         | -0.6        | -0.8        |
|             | B0229  | -100.4    | -0.8       | -13.9      | 1.6         | -46.0       | 2.7         |
|             | B0230  | 8.5       | -1.4       | 1.3        | -1.6        | 6.5         | 6.6         |
|             | B0235  | 80.7      | -0.6       | -3.6       | -0.4        | 11.9        | -3.1        |
|             | B0240  | -159.7    | -1.2       | -10.4      | 0.5         | 26.3        | -3.5        |
| ULS-Set(36) | B0227  | 13.4      | -0.6       | -2.1       | 1.9         | 0.2         | -2.2        |
|             | B0229  | -109.7    | -1.0       | -2.7       | 0.7         | -19.9       | 4.6         |
|             | B0230  | 15.4      | -0.6       | 1.9        | 0.9         | 7.0         | 0.7         |
|             | B0235  | 92.2      | 0.3        | -3.6       | -0.6        | 8.5         | 1.0         |
|             | B0240  | -169.4    | -0.6       | -5.7       | -0.7        | 10.2        | -2.0        |
| ULS-Set(37) | B0227  | 6.1       | 0.4        | -1.7       | 0.6         | -1.4        | 0.9         |
|             | B0229  | -75.3     | -0.7       | -3.1       | 3.7         | -21.0       | 2.2         |
|             | B0230  | 3.5       | 0.1        | 1.1        | -2.1        | 6.5         | 1.7         |
|             | B0235  | 71.0      | -1.0       | -1.9       | -1.1        | 2.3         | -3.4        |
|             | B0240  | -126.0    | -1.7       | -7.9       | 0.2         | 15.2        | -3.8        |
| ULS-Set(38) | B0227  | 11.3      | -0.2       | -0.9       | -0.4        | -3.7        | 0.3         |
|             | B0229  | 96.0      | -2.5       | 1.0        | 0.8         | 7.7         | 14.3        |
|             | B0230  | 12.9      | 2.4        | 5.3        | -0.5        | 14.6        | -4.0        |
|             | B0235  | -85.7     | 0.1        | -2.1       | 0.4         | 1.2         | 1.9         |
|             | B0240  | 159.0     | -1.1       | 2.5        | -3.2        | -6.6        | -4.2        |
| ULS-Set(39) | B0227  | 14.8      | -0.4       | -1.3       | 1.9         | -3.9        | -1.6        |
|             | B0229  | -93.9     | -2.5       | -3.5       | 2.2         | -23.8       | 12.7        |
|             | B0230  | 16.1      | 0.3        | 5.5        | -0.7        | 16.0        | 0.3         |
|             | B0235  | 77.7      | -0.1       | -2.8       | -1.3        | 5.8         | 0.2         |
|             | B0240  | -140.8    | -1.7       | -8.2       | -2.1        | 15.8        | -5.9        |
| ULS-Set(40) | B0227  | 16.1      | -0.6       | -1.4       | 2.1         | -3.6        | -2.1        |
|             | B0229  | -90.4     | -2.5       | -3.2       | 1.6         | -22.2       | 13.3        |
|             | B0230  | 18.4      | 0.4        | 5.6        | -0.1        | 16.1        | -0.2        |
|             | B0235  | 73.1      | 0.2        | -3.1       | -1.2        | 6.9         | 1.2         |
|             | B0240  | -133.3    | -1.5       | -7.3       | -2.4        | 13.8        | -5.4        |
| ULS-Set(49) | B0227  | 8.5       | -0.4       | -1.4       | 3.0         | -0.5        | -1.3        |
|             | B0229  | -96.1     | -0.7       | -13.5      | 0.7         | -43.2       | 2.8         |
|             | B0230  | 8.6       | -1.5       | 1.4        | -1.0        | 5.6         | 6.4         |
|             | B0235  | 74.7      | -0.3       | -3.2       | -0.3        | 11.9        | -2.0        |
|             | B0240  | -150.0    | -0.8       | -9.2       | 0.4         | 24.2        | -2.8        |
| ULS-Set(50) | B0227  | 5.6       | 0.3        | -1.2       | -1.4        | -1.4        | 1.8         |
|             | B0229  | 122.2     | -1.2       | 1.8        | 1.3         | 13.1        | 6.8         |
|             | B0230  | 4.9       | 2.2        | 2.0        | -1.1        | 7.3         | -3.4        |
|             | B0235  | -102.3    | -0.4       | -1.7       | 0.9         | -0.8        | -0.1        |
|             | B0240  | 190.8     | -0.8       | 4.1        | -1.7        | -10.2       | -2.2        |
| ULS-Set(52) | B0227  | 7.8       | 0.3        | -1.8       | -1.4        | -1.2        | 1.9         |
|             | B0229  | 121.4     | -1.3       | 1.6        | 1.6         | 11.9        | 7.2         |

| Name | Member | N [kN] | Vy [kN] | Vz [kN] | Mx [kNm] | My [kNm] | Mz [kNm] |
|------|--------|--------|---------|---------|----------|----------|----------|
|      | B6230  | 7.0    | 2.4     | 2.1     | -1.1     | 8.3      | -3.7     |
|      | B6235  | -100.9 | -0.5    | -2.5    | 0.9      | 0.3      | -0.2     |
|      | B6240  | 188.6  | -1.0    | 3.8     | -1.8     | -10.1    | -2.5     |

### Check

#### Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.0 < 5.0%     | OK     |
| Welds    | 72.1 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

#### Plates


| Name   | Thickness [mm] | Loads       | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma^{cEd}$ [MPa] | Status |
|--------|----------------|-------------|---------------------|---------------------|----------------------|--------|
| B6227  | 8.0            | ULS-Set(35) | 69.4                | 0.0                 | 0.0                  | OK     |
| B6229  | 8.0            | ULS-Set(35) | 190.1               | 0.0                 | 0.0                  | OK     |
| B6230  | 8.0            | ULS-Set(40) | 91.9                | 0.0                 | 0.0                  | OK     |
| B6235  | 8.0            | ULS-Set(35) | 70.4                | 0.0                 | 0.0                  | OK     |
| B6240  | 8.0            | ULS-Set(35) | 163.3               | 0.0                 | 0.0                  | OK     |
| STIFF1 | 12.0           | ULS-Set(35) | 33.9                | 0.0                 | 0.0                  | OK     |

#### Design data


| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |

#### Symbol explanation


|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma^{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |

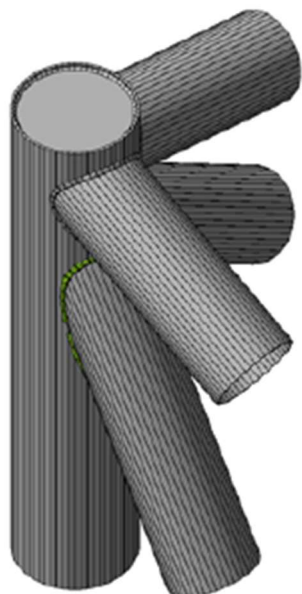


Overall check, ULS-Set(35)

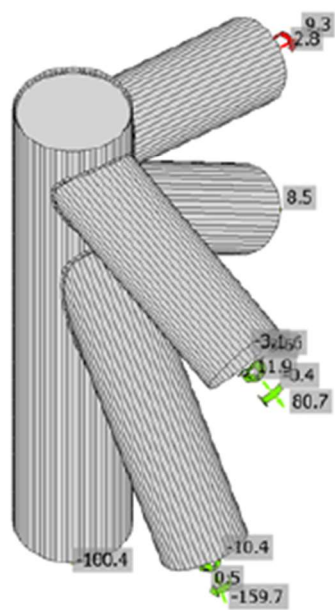

Strain check, ULS-Set(35)

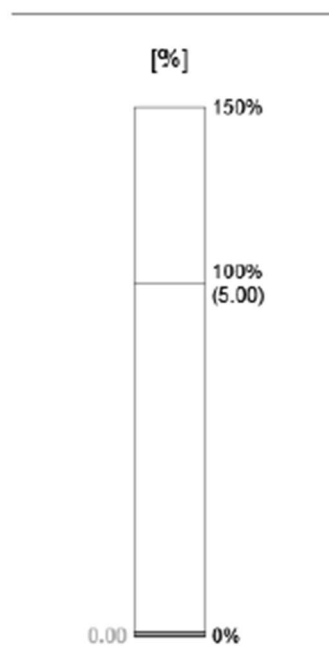



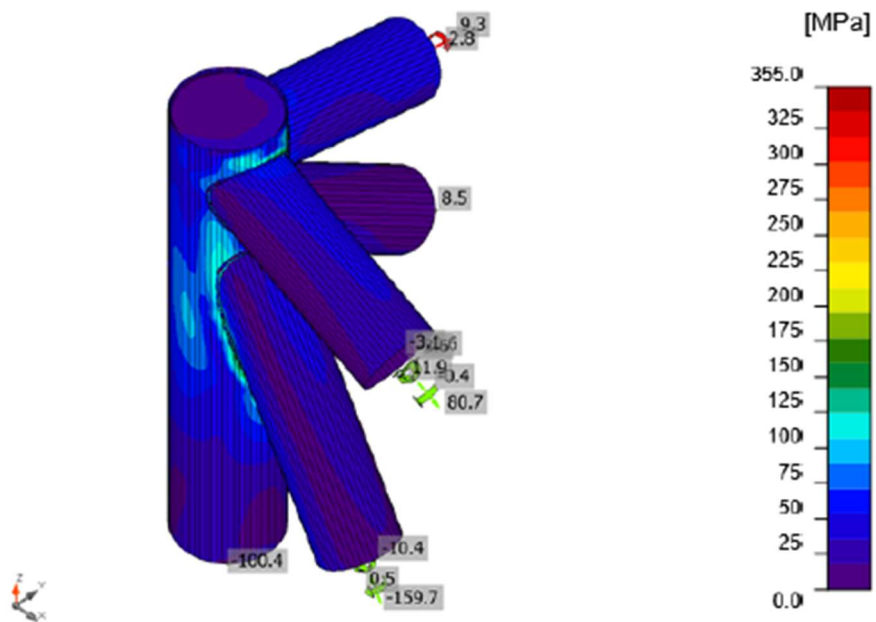

Equivalent stress, ULS-Set(35)

## Welds (Plastic redistribution)

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6229-arc 4  | B6227  | ▲6.0            | 873         | ULS-Set(35) | 106.7                 | 0.0                 | 8.8                    | -56.4                    | -24.2                | 24.5   | 13.3                | OK     |
| B6229-arc 6  | B6230  | ▲6.0            | 967         | ULS-Set(39) | 143.0                 | 0.0                 | -27.0                  | -73.6                    | -33.9                | 32.8   | 11.4                | OK     |
| B6229-arc 49 | B6235  | ▲6.0            | 923         | ULS-Set(33) | 103.0                 | 0.0                 | -48.4                  | 52.5                     | 0.5                  | 23.6   | 8.2                 | OK     |
| B6229-arc 54 | B6240  | ▲6.0            | 1391        | ULS-Set(35) | 314.2                 | 0.0                 | 170.0                  | 22.5                     | 150.9                | 72.1   | 16.1                | OK     |
| B6229-arc 1  | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 55.0                  | 0.0                 | 0.2                    | 31.7                     | -0.1                 | 12.6   | 12.6                | OK     |
| B6229-arc 2  | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 52.9                  | 0.0                 | -1.5                   | 30.4                     | -3.1                 | 12.1   | 12.1                | OK     |
| B6229-arc 3  | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 49.7                  | 0.0                 | -1.7                   | -28.7                    | -0.6                 | 11.4   | 11.4                | OK     |
| B6229-arc 4  | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 44.6                  | 0.0                 | -0.3                   | -25.8                    | 0.6                  | 10.3   | 10.3                | OK     |
| B6229-arc 5  | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 39.8                  | 0.0                 | 2.1                    | -22.8                    | 2.9                  | 9.1    | 9.1                 | OK     |
| B6229-arc 6  | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 36.9                  | 0.0                 | -0.5                   | -21.3                    | -0.2                 | 8.5    | 8.5                 | OK     |
| B6229-arc 7  | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 34.1                  | 0.0                 | 1.1                    | -19.6                    | 1.7                  | 7.8    | 7.8                 | OK     |
| B6229-arc 8  | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 31.7                  | 0.0                 | 1.7                    | -18.1                    | 2.6                  | 7.3    | 7.3                 | OK     |
| B6229-arc 9  | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 27.3                  | 0.0                 | 2.1                    | -15.4                    | 3.1                  | 6.3    | 6.3                 | OK     |
| B6229-arc 10 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 26.3                  | 0.0                 | -3.0                   | -14.9                    | -2.4                 | 6.0    | 6.0                 | OK     |
| B6229-arc 11 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 28.4                  | 0.0                 | -1.9                   | -16.3                    | -1.2                 | 6.5    | 6.5                 | OK     |
| B6229-arc 12 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 29.6                  | 0.0                 | -1.3                   | -17.1                    | -0.6                 | 6.8    | 6.8                 | OK     |
| B6229-arc 13 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 28.2                  | 0.0                 | -0.8                   | -16.3                    | -0.3                 | 6.5    | 6.5                 | OK     |
| B6229-arc 14 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 27.1                  | 0.0                 | 0.3                    | -15.6                    | 0.9                  | 6.2    | 6.2                 | OK     |
| B6229-arc 15 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 26.3                  | 0.0                 | 0.6                    | -15.2                    | 1.2                  | 6.0    | 6.0                 | OK     |
| B6229-arc 16 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 24.0                  | 0.0                 | 0.8                    | -13.8                    | 1.1                  | 5.5    | 5.5                 | OK     |
| B6229-arc 17 | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 22.3                  | 0.0                 | 0.2                    | -12.8                    | 0.6                  | 5.1    | 5.1                 | OK     |
| B6229-arc 18 | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 20.7                  | 0.0                 | 0.7                    | -11.9                    | 0.9                  | 4.8    | 4.8                 | OK     |
| B6229-arc 19 | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 21.1                  | 0.0                 | 0.6                    | 12.1                     | 0.4                  | 4.8    | 4.8                 | OK     |
| B6229-arc 20 | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 22.1                  | 0.0                 | 0.2                    | 12.7                     | 0.2                  | 5.1    | 5.1                 | OK     |
| B6229-arc 21 | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 22.6                  | 0.0                 | 0.0                    | 13.0                     | 0.0                  | 5.2    | 5.2                 | OK     |
| B6229-arc 22 | STIFF1 | ▲6.0            | 17          | ULS-Set(39) | 23.0                  | 0.0                 | 0.1                    | 13.3                     | 0.2                  | 5.3    | 5.3                 | OK     |
| B6229-arc 23 | STIFF1 | ▲6.0            | 17          | ULS-Set(39) | 23.2                  | 0.0                 | 0.0                    | 13.4                     | 0.1                  | 5.3    | 5.3                 | OK     |
| B6229-arc 24 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 23.3                  | 0.0                 | 1.3                    | 13.4                     | 1.5                  | 5.4    | 5.4                 | OK     |
| B6229-arc 25 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 25.8                  | 0.0                 | 0.9                    | 14.9                     | 1.1                  | 5.9    | 5.9                 | OK     |
| B6229-arc 26 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 27.8                  | 0.0                 | 0.7                    | 16.0                     | 1.0                  | 6.4    | 6.4                 | OK     |
| B6229-arc 27 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 28.8                  | 0.0                 | -0.1                   | 16.6                     | 0.5                  | 6.6    | 6.6                 | OK     |
| B6229-arc 28 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 30.0                  | 0.0                 | -0.7                   | 17.3                     | -0.3                 | 6.9    | 6.9                 | OK     |
| B6229-arc 29 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 29.8                  | 0.0                 | -1.2                   | 17.2                     | -0.7                 | 6.8    | 6.8                 | OK     |
| B6229-arc 30 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 28.0                  | 0.0                 | -1.8                   | 16.1                     | -1.2                 | 6.4    | 6.4                 | OK     |
| B6229-arc 31 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 29.6                  | 0.0                 | 1.8                    | 16.8                     | 2.8                  | 6.8    | 6.8                 | OK     |
| B6229-arc 32 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 32.1                  | 0.0                 | 1.1                    | 18.4                     | 2.0                  | 7.4    | 7.4                 | OK     |
| B6229-arc 33 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 34.0                  | 0.0                 | 0.1                    | 19.6                     | 1.0                  | 7.8    | 7.8                 | OK     |
| B6229-arc 34 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 34.4                  | 0.0                 | -0.8                   | 19.9                     | -0.3                 | 7.9    | 7.9                 | OK     |
| B6229-arc 35 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 33.6                  | 0.0                 | -1.4                   | 19.3                     | -1.5                 | 7.7    | 7.7                 | OK     |

| Item         | Edge   | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | Ut [%] | Ut <sub>c</sub> [%] | Status |
|--------------|--------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|--------|---------------------|--------|
| B6229-arc 36 | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 30.5                  | 0.0                 | 0.2                    | 17.6                     | 0.2                  | 7.0    | 7.0                 | OK     |
| B6229-arc 37 | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 34.2                  | 0.0                 | -2.4                   | -19.4                    | -3.3                 | 7.8    | 7.8                 | OK     |
| B6229-arc 38 | STIFF1 | ▲6.0            | 17          | ULS-Set(40) | 38.3                  | 0.0                 | -2.3                   | -21.9                    | -3.0                 | 8.8    | 8.8                 | OK     |
| B6229-arc 39 | STIFF1 | ▲6.0            | 17          | ULS-Set(36) | 41.8                  | 0.0                 | -0.6                   | -24.1                    | -1.2                 | 9.6    | 9.6                 | OK     |
| B6229-arc 40 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 51.2                  | 0.0                 | -3.2                   | -29.0                    | -5.3                 | 11.7   | 11.7                | OK     |
| B6229-arc 41 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 56.9                  | 0.0                 | -2.3                   | -32.7                    | -3.5                 | 13.1   | 13.1                | OK     |
| B6229-arc 42 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 61.0                  | 0.0                 | -0.7                   | -35.2                    | -1.0                 | 14.0   | 14.0                | OK     |
| B6229-arc 43 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 62.1                  | 0.0                 | 0.9                    | -35.8                    | 1.1                  | 14.2   | 14.2                | OK     |
| B6229-arc 44 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 59.7                  | 0.0                 | 2.4                    | -34.3                    | 2.5                  | 13.7   | 13.7                | OK     |
| B6229-arc 45 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 49.8                  | 0.0                 | 3.6                    | -28.3                    | 4.4                  | 11.4   | 11.4                | OK     |
| B6229-arc 46 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 40.0                  | 0.0                 | 6.4                    | -21.6                    | 7.3                  | 9.2    | 9.2                 | OK     |
| B6229-arc 47 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 38.8                  | 0.0                 | -0.3                   | -22.4                    | 0.0                  | 8.9    | 8.9                 | OK     |
| B6229-arc 48 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 36.9                  | 0.0                 | 0.1                    | -21.3                    | 1.1                  | 8.5    | 8.5                 | OK     |
| B6229-arc 49 | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 34.4                  | 0.0                 | -2.2                   | -19.7                    | -1.9                 | 7.9    | 7.9                 | OK     |
| B6229-arc 50 | STIFF1 | ▲6.0            | 17          | ULS-Set(36) | 40.1                  | 0.0                 | 4.0                    | 22.5                     | 4.9                  | 9.2    | 9.2                 | OK     |
| B6229-arc 51 | STIFF1 | ▲6.0            | 17          | ULS-Set(36) | 48.5                  | 0.0                 | 2.8                    | 27.8                     | 3.1                  | 11.1   | 11.1                | OK     |
| B6229-arc 52 | STIFF1 | ▲6.0            | 17          | ULS-Set(36) | 54.0                  | 0.0                 | 1.5                    | 31.1                     | 1.2                  | 12.4   | 12.4                | OK     |
| B6229-arc 53 | STIFF1 | ▲6.0            | 17          | ULS-Set(36) | 56.0                  | 0.0                 | -0.1                   | 32.4                     | -0.2                 | 12.9   | 12.9                | OK     |
| B6229-arc 54 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 57.3                  | 0.0                 | 1.0                    | 33.1                     | 0.7                  | 13.1   | 13.1                | OK     |
| B6229-arc 55 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 56.5                  | 0.0                 | 0.1                    | 32.6                     | -0.8                 | 13.0   | 13.0                | OK     |
| B6229-arc 56 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 53.0                  | 0.0                 | -1.4                   | 30.5                     | -2.6                 | 12.2   | 12.2                | OK     |
| B6229-arc 57 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 48.9                  | 0.0                 | -2.5                   | 28.0                     | -3.5                 | 11.2   | 11.2                | OK     |
| B6229-arc 58 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 43.0                  | 0.0                 | -3.4                   | 24.5                     | -3.6                 | 9.9    | 9.9                 | OK     |
| B6229-arc 59 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 36.1                  | 0.0                 | -4.1                   | 20.3                     | -4.1                 | 8.3    | 8.3                 | OK     |
| B6229-arc 60 | STIFF1 | ▲6.0            | 17          | ULS-Set(35) | 29.8                  | 0.0                 | -5.2                   | 16.2                     | -5.0                 | 6.8    | 6.8                 | OK     |
| B6229-arc 61 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 34.8                  | 0.0                 | 4.7                    | 18.6                     | 7.0                  | 8.0    | 8.0                 | OK     |
| B6229-arc 62 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 42.7                  | 0.0                 | 4.1                    | 23.7                     | 6.6                  | 9.8    | 9.8                 | OK     |
| B6229-arc 63 | STIFF1 | ▲6.0            | 17          | ULS-Set(23) | 48.2                  | 0.0                 | 2.5                    | 27.4                     | 4.6                  | 11.1   | 11.1                | OK     |
| B6229-arc 64 | STIFF1 | ▲6.0            | 17          | ULS-Set(14) | 52.1                  | 0.0                 | 2.7                    | 29.8                     | 3.8                  | 12.0   | 12.0                | OK     |

## Design data

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | $0.9 \sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

**Symbol explanation**

|                  |   |
|------------------|---|
| $\epsilon_{pl}$  | Strain  |
| $\sigma_{w,Ed}$  | Equivalent stress   |
| $\sigma_{w,Rd}$  | Equivalent stress resistance                                    |
| $\sigma_{\perp}$ | Perpendicular stress  |
| $\tau_{  }$      | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$   | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$     | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$        | Correlation factor EN 1993-1-8 tab. 4.1                         |
| Ut               | Utilization   |
| Utc              | Weld capacity utilization                                       |

**Buckling**

Buckling analysis was not calculated.

**Code settings**

| Item                                    | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| YM0                                     | 1.00                   | -    | EN 1993-1-1: 6.1   |
| YM1                                     | 1.00                   | -    | EN 1993-1-1: 6.1   |
| YM2                                     | 1.25                   | -    | EN 1993-1-1: 6.1   |
| YM3                                     | 1.25                   | -    | EN 1993-1-8: 2.2   |
| YC                                      | 1.50                   | -    | EN 1992-1-1: 2.4.2.4                                       |
| Yinst                                   | 1.20                   | -    | EN 1992-4: Table 4.1                                       |
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size | 0.10                   | -    |  |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                  | Plastic redistribution |      |  |
| Detailing                               | No                     |      |  |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated ab in bearing check.     | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                        | Yes                    |      | EN 1992-4  |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)         | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                           | No                     |      | EN 1993-1-8: 5.2.2.5                                       |



## 5.7. Karakteristični spoj pokrova


### Project item Con N5737

#### Design

|             |           |
|-------------|-----------|
| Name        | Con N5737 |
| Description |           |
| Analysis    | Stiffness |

#### Beams and columns

| Name  | Cross-section                     | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B5618 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B5622 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | -200           | 0              | Position  |
| B5626 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |

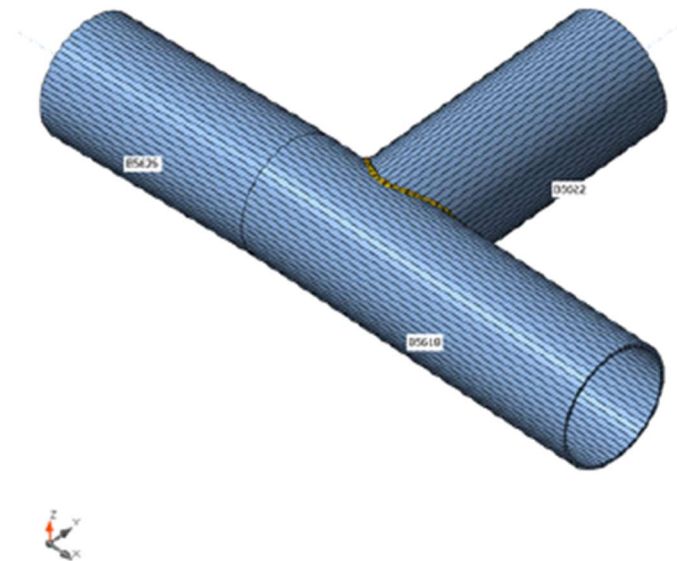

#### Cross-sections

| Name                              | Material |
|-----------------------------------|----------|
| 1 - Massive O<br>Hollow(CHS273,8) | S 355    |

## Load effects

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(1)  | B5618  | -34.2     | -0.7       | -10.6      | 16.2        | 13.6        | 1.9         |
|             | B5622  | -0.1      | -1.0       | 10.9       | 3.0         | -24.8       | -1.4        |
|             | B5626  | 35.8      | 0.6        | 1.7        | 8.4         | -10.6       | 1.3         |
| ULS-Set(2)  | B5618  | 35.6      | 0.1        | -2.5       | 0.8         | 1.3         | -0.3        |
|             | B5622  | 0.2       | -0.4       | 1.6        | -0.8        | -4.0        | -0.1        |
|             | B5626  | -35.1     | 0.2        | -1.0       | 3.1         | -2.1        | 0.7         |
| ULS-Set(13) | B5618  | -21.5     | 0.2        | 5.5        | -3.2        | 1.1         | -0.4        |
|             | B5622  | -0.1      | 0.8        | -1.6       | -0.7        | 5.5         | 0.7         |
|             | B5626  | 20.8      | -0.2       | -2.9       | -2.3        | -1.9        | -0.7        |
| ULS-Set(14) | B5618  | 24.9      | -1.2       | -6.2       | 7.0         | 1.1         | 2.3         |
|             | B5622  | -1.9      | -0.7       | 5.8        | 0.3         | -12.9       | -0.5        |
|             | B5626  | -23.8     | -0.7       | -0.9       | 5.9         | -0.8        | -0.7        |
| ULS-Set(15) | B5618  | -32.5     | 0.0        | 2.4        | 1.4         | 4.4         | 0.2         |
|             | B5622  | -0.1      | 0.5        | 1.1        | 0.4         | -0.9        | 0.2         |
|             | B5626  | 32.2      | -0.1       | -1.7       | -0.5        | -4.1        | -0.3        |
| ULS-Set(17) | B5618  | 32.7      | 0.0        | -2.8       | 2.7         | 4.3         | -0.3        |
|             | B5622  | 0.3       | -0.6       | 2.2        | -0.1        | -5.8        | -0.3        |
|             | B5626  | -32.0     | 0.3        | -1.1       | 3.1         | -4.3        | 1.1         |
| ULS-Set(19) | B5618  | 30.3      | -0.6       | -3.3       | 2.0         | -1.5        | 1.1         |
|             | B5622  | -1.1      | -0.4       | 2.9        | -1.0        | -6.0        | -0.1        |
|             | B5626  | -29.7     | -0.5       | -1.2       | 4.1         | 0.5         | -0.5        |
| ULS-Set(21) | B5618  | 34.4      | 0.1        | -2.0       | 1.4         | 3.0         | -0.4        |
|             | B5622  | 0.3       | -0.5       | 1.1        | -0.1        | -3.5        | -0.3        |
|             | B5626  | -33.8     | 0.3        | -1.0       | 2.0         | -3.2        | 1.0         |
| ULS-Set(25) | B5618  | -30.8     | 0.0        | 3.2        | 0.2         | 3.2         | 0.0         |
|             | B5622  | -0.1      | 0.5        | 0.0        | 0.3         | 1.4         | 0.2         |
|             | B5626  | 30.4      | -0.1       | -1.6       | -1.6        | -2.9        | -0.4        |
| ULS-Set(33) | B5618  | 32.1      | -0.1       | -5.6       | 6.3         | 7.0         | 0.1         |
|             | B5622  | 0.3       | -0.9       | 4.8        | 0.6         | -11.8       | -0.6        |
|             | B5626  | -30.9     | 0.4        | -0.8       | 5.3         | -6.4        | 1.4         |
| ULS-Set(35) | B5618  | -33.1     | -0.2       | -0.5       | 5.1         | 7.2         | 0.6         |
|             | B5622  | -0.1      | 0.2        | 3.6        | 1.1         | -6.8        | -0.1        |
|             | B5626  | 33.2      | 0.1        | -1.4       | 1.7         | -6.1        | 0.0         |

## Check

## Rotational stiffness

| Name  | Comp. | Loads       | Mj,Rd<br>[kNm] | Sj,ini<br>[MNm/rad] | $\Phi_c$<br>[mrad] | L<br>[m] | Sj,R<br>[MNm/rad] | Sj,P<br>[MNm/rad] | Class.     |
|-------|-------|-------------|----------------|---------------------|--------------------|----------|-------------------|-------------------|------------|
| B5618 | Mx    | ULS-Set(1)  | 19.6           | 1562.7              | 0.0                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(1)  | 120.8          | ∞                   | 5.8                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(2)  | 0.7            | 413930.3            | 0.0                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(2)  | 78.3           | ∞                   | 4.1                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(13) | -2.0           | 1.2                 | 1.6                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(13) | 63.2           | 87.3                | -5.3               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(14) | 13.8           | ∞                   | 1.3                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(14) | 2.1            | ∞                   | 4.2                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(15) | 3.5            | 6.1                 | 1.8                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(15) | 242.6          | ∞                   | 10.8               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(17) | 3.5            | ∞                   | 0.0                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(17) | 129.6          | ∞                   | 6.2                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(19) | 3.3            | 1.3                 | -1.7               | 6.00     |                   |                   |            |
|       | My    | ULS-Set(19) | -169.5         | ∞                   | 0.0                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(21) | 1.9            | ∞                   | 0.1                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(21) | 130.1          | ∞                   | 7.1                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(25) | 0.5            | 0.3                 | 2.6                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(25) | 241.1          | ∞                   | 12.4               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(33) | 7.6            | ∞                   | 0.0                | 6.00     |                   |                   |            |
|       | My    | ULS-Set(33) | 119.8          | ∞                   | 5.4                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mx    | ULS-Set(35) | 9.6            | 6020.1              | -0.1               | 6.00     |                   |                   |            |
|       | My    | ULS-Set(35) | 188.2          | ∞                   | 16.8               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(1)  | 17.1           | 75.1                | 0.7                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(2)  | 16.5           | ∞                   | -0.3               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(13) | 23.1           | ∞                   | -0.6               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(14) | 196.5          | ∞                   | 7.6                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(15) | 9.4            | 301.4               | 0.6                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(17) | 8.1            | ∞                   | -0.3               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(19) | -124.1         | ∞                   | 3.8                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(21) | 17.6           | ∞                   | -0.7               | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(25) | 2.3            | 33.7                | 0.3                | 6.00     | 51.1              | 1.0               | Semi-rigid |
|       | Mz    | ULS-Set(33) | 2.1            | ∞                   | 0.1                | 6.00     | 51.1              | 1.0               | Rigid      |
|       | Mz    | ULS-Set(35) | 14.7           | 506.9               | 1.3                | 6.00     | 51.1              | 1.0               | Rigid      |



## Secant rotational stiffness



| Name  | Comp. | Loads       | M<br>[kNm] | S <sub>js</sub><br>[MNm/rad] | Φ<br>[mrad] |
|-------|-------|-------------|------------|------------------------------|-------------|
| B5618 | Mx    | ULS-Set(1)  | 16.2       | 1510.8                       | 0.0         |
|       | My    | ULS-Set(1)  | 13.6       | ∞                            | 0.0         |
|       | Mx    | ULS-Set(2)  | 0.8        | 0.0                          | 0.0         |
|       | My    | ULS-Set(2)  | 1.3        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(13) | -3.2       | 0.0                          | 0.0         |
|       | My    | ULS-Set(13) | 1.1        | 87.9                         | 0.0         |
|       | Mx    | ULS-Set(14) | 7.0        | ∞                            | 0.0         |
|       | My    | ULS-Set(14) | 1.1        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(15) | 1.4        | 6.0                          | 0.2         |
|       | My    | ULS-Set(15) | 4.4        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(17) | 2.7        | ∞                            | 0.0         |
|       | My    | ULS-Set(17) | 4.3        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(19) | 2.0        | 1.3                          | -1.5        |
|       | My    | ULS-Set(19) | -1.5       | ∞                            | 0.0         |
|       | Mx    | ULS-Set(21) | 1.4        | ∞                            | 0.0         |
|       | My    | ULS-Set(21) | 3.0        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(25) | 0.2        | 0.3                          | 0.7         |
|       | My    | ULS-Set(25) | 3.2        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(33) | 6.3        | ∞                            | 0.0         |
|       | My    | ULS-Set(33) | 7.0        | ∞                            | 0.0         |
|       | Mx    | ULS-Set(35) | 5.1        | 6228.7                       | 0.0         |
|       | My    | ULS-Set(35) | 7.2        | ∞                            | 0.0         |
|       | Mz    | ULS-Set(1)  | 1.9        | 77.6                         | 0.0         |
|       | Mz    | ULS-Set(2)  | -0.3       | 0.0                          | 0.0         |
|       | Mz    | ULS-Set(13) | -0.4       | 0.0                          | 0.0         |
|       | Mz    | ULS-Set(14) | 2.3        | ∞                            | 0.0         |
|       | Mz    | ULS-Set(15) | 0.2        | 289.5                        | 0.0         |
|       | Mz    | ULS-Set(17) | -0.3       | 0.0                          | 0.0         |
|       | Mz    | ULS-Set(19) | 1.1        | 0.0                          | 0.0         |
|       | Mz    | ULS-Set(21) | -0.4       | 0.0                          | 0.0         |
|       | Mz    | ULS-Set(25) | 0.0        | 43.2                         | 0.0         |
|       | Mz    | ULS-Set(33) | 0.1        | ∞                            | 0.0         |
|       | Mz    | ULS-Set(35) | 0.6        | ∞                            | 0.0         |


## Symbol explanation

|                |                                      |
|----------------|--------------------------------------|
| $M_{j,Rd}$     | Bending resistance                   |
| $S_{j,ini}$    | Initial rotational stiffness         |
| $S_{j,s}$      | Secant rotational stiffness          |
| Φ              | Rotational deformation               |
| Φ <sub>c</sub> | Rotational capacity                  |
| $S_{j,R}$      | Limit value - rigid joint            |
| $S_{j,P}$      | Limit value - nominally pinned joint |




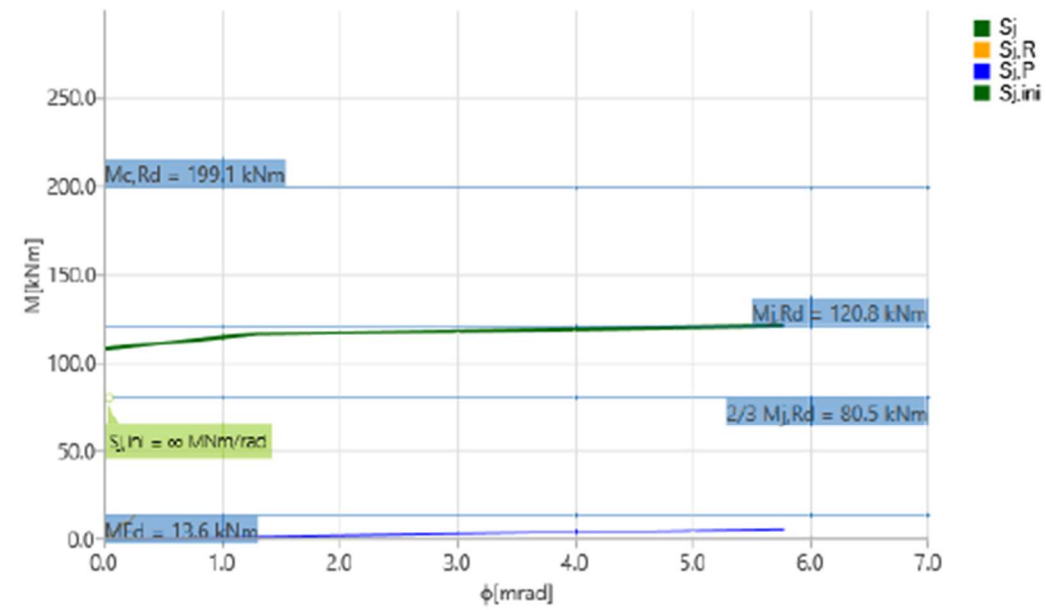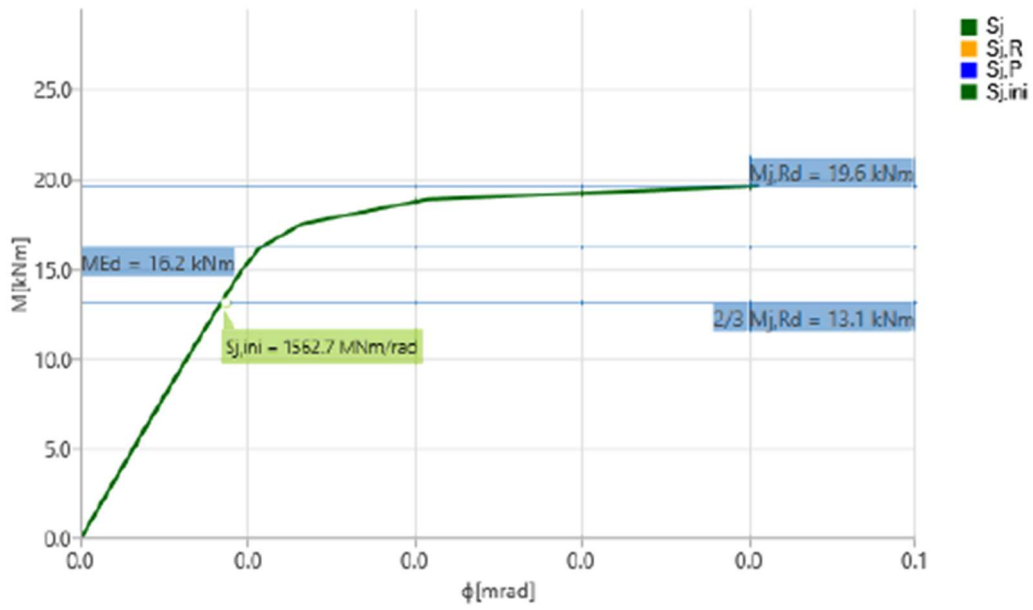

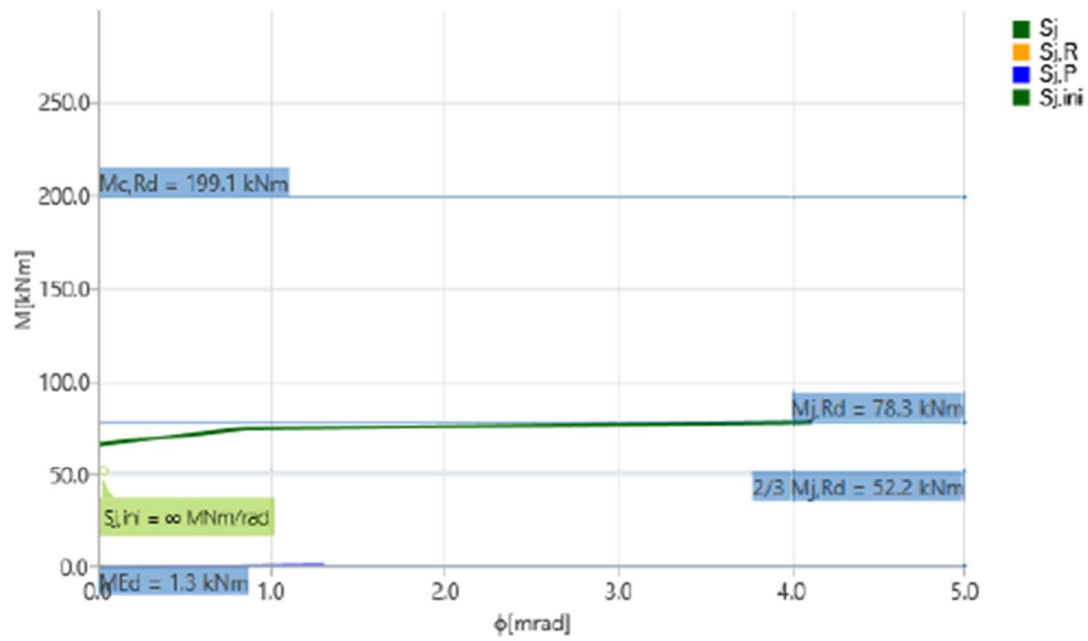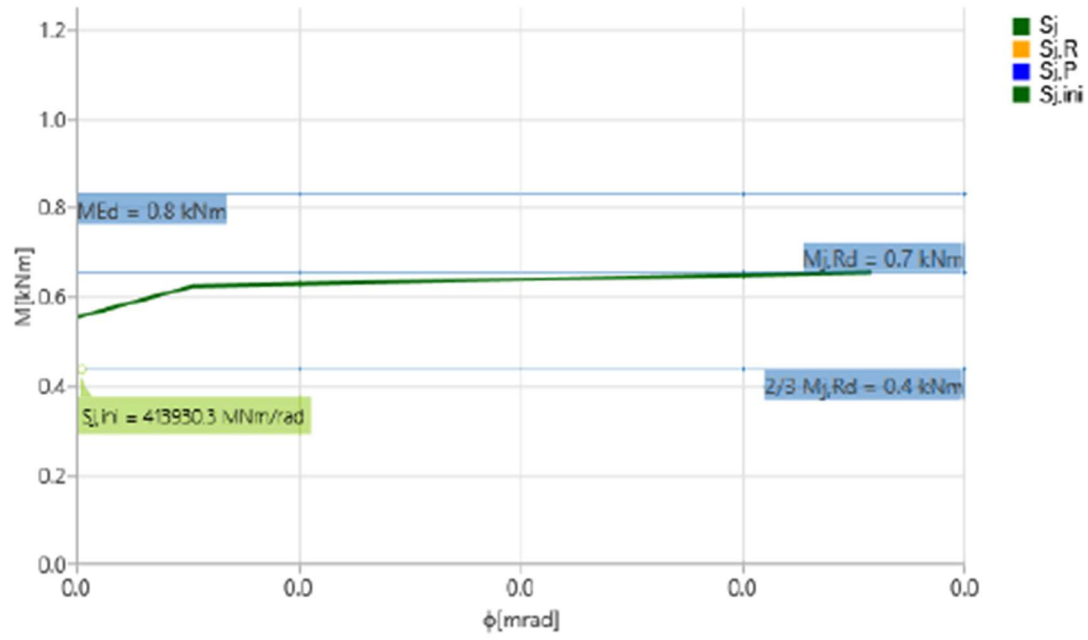


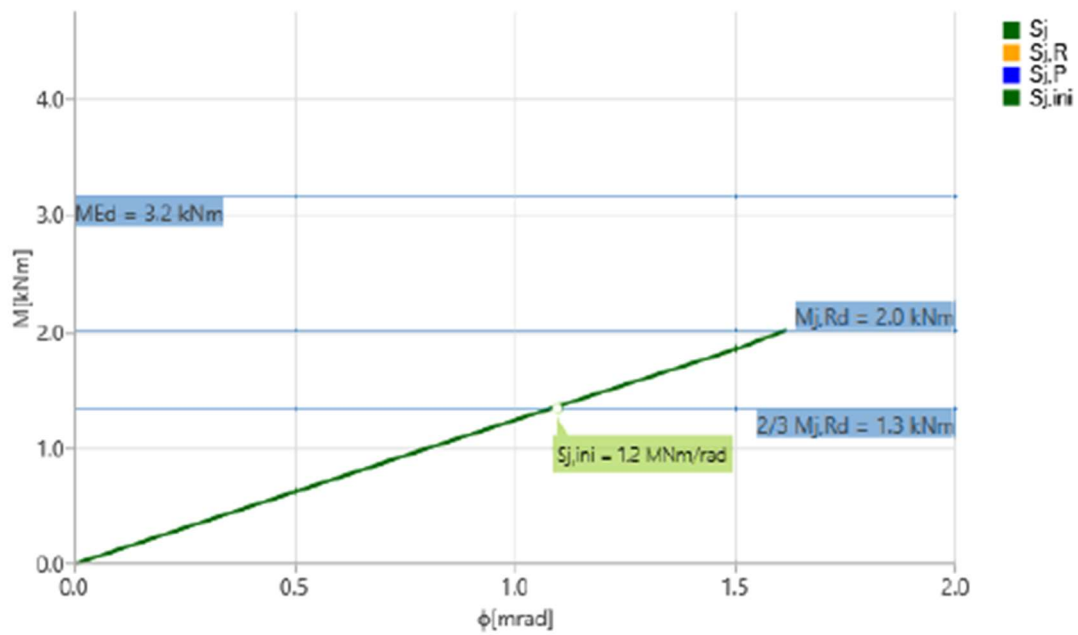


Stiffness diagram  $M_x - \phi$ , ULS-Set(13)

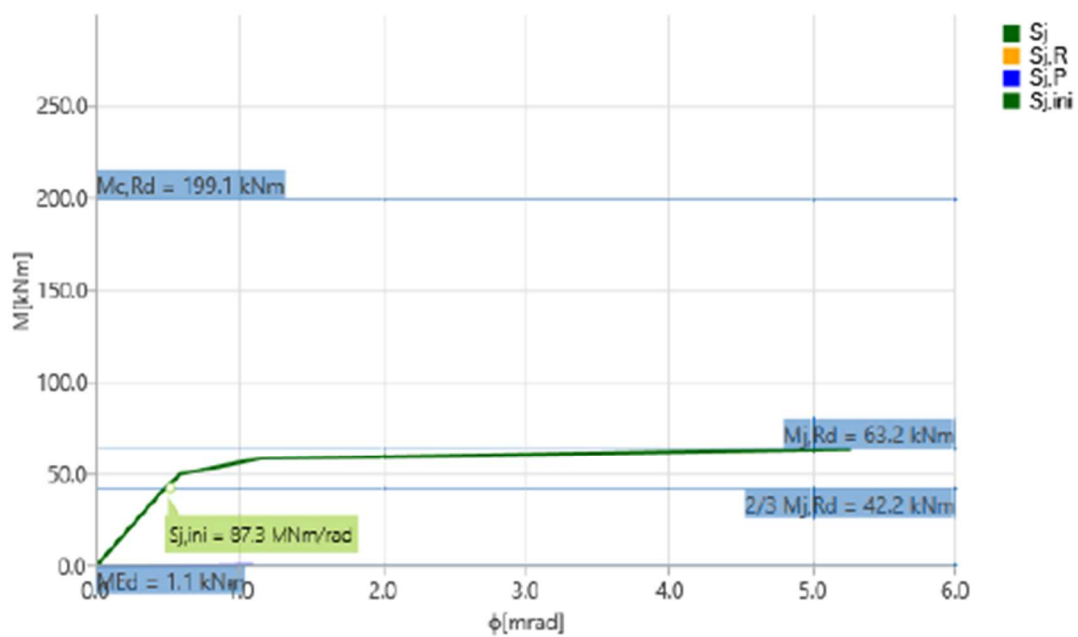


Stiffness diagram  $M_y - \phi_y$ , ULS-Set(13)

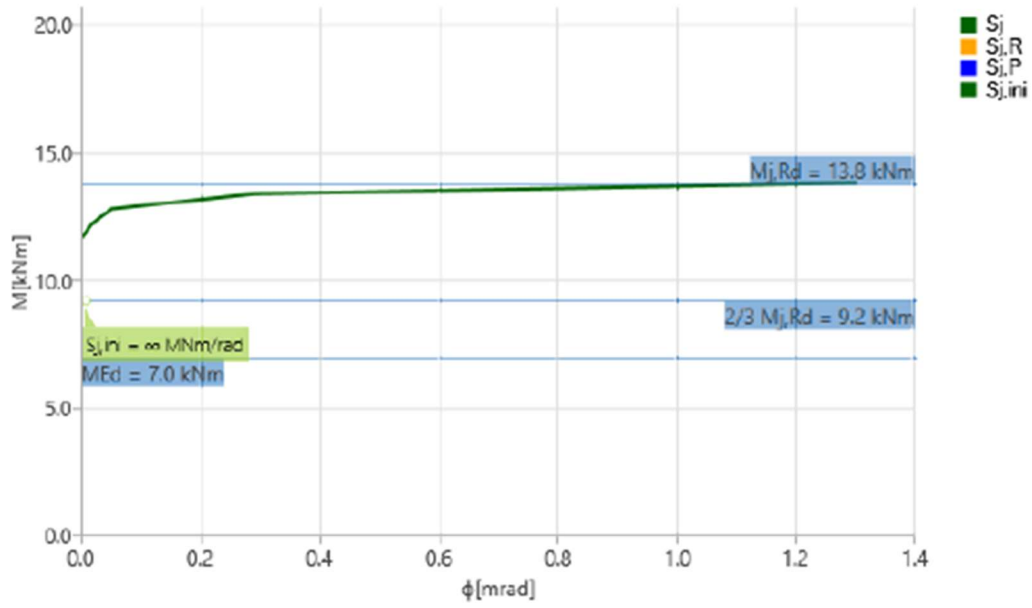


Stiffness diagram  $M_x - \phi$ . ULS-Set(14)

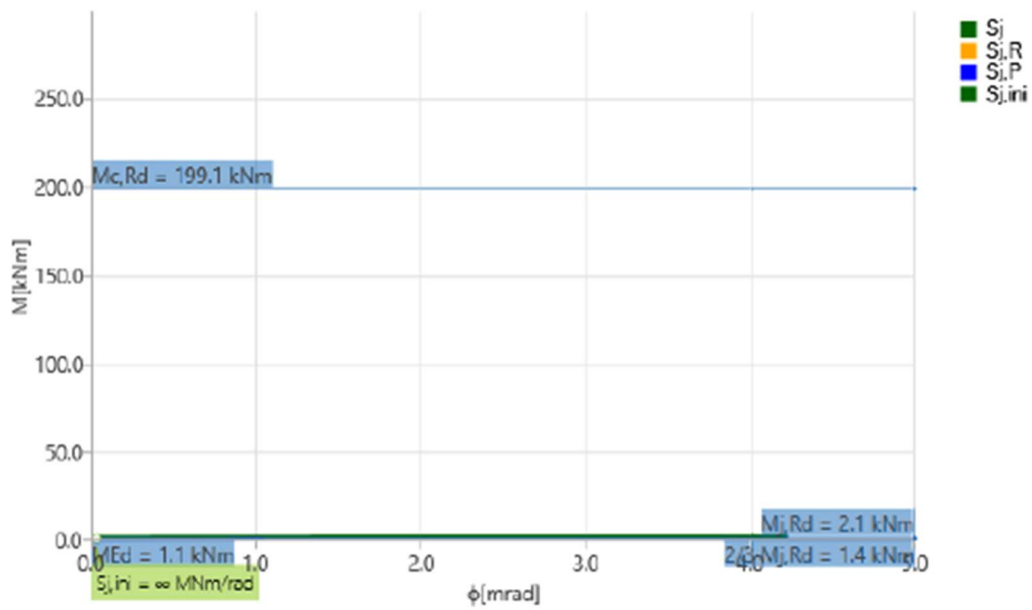


Stiffness diagram  $M_y - \phi$ . ULS-Set(14)

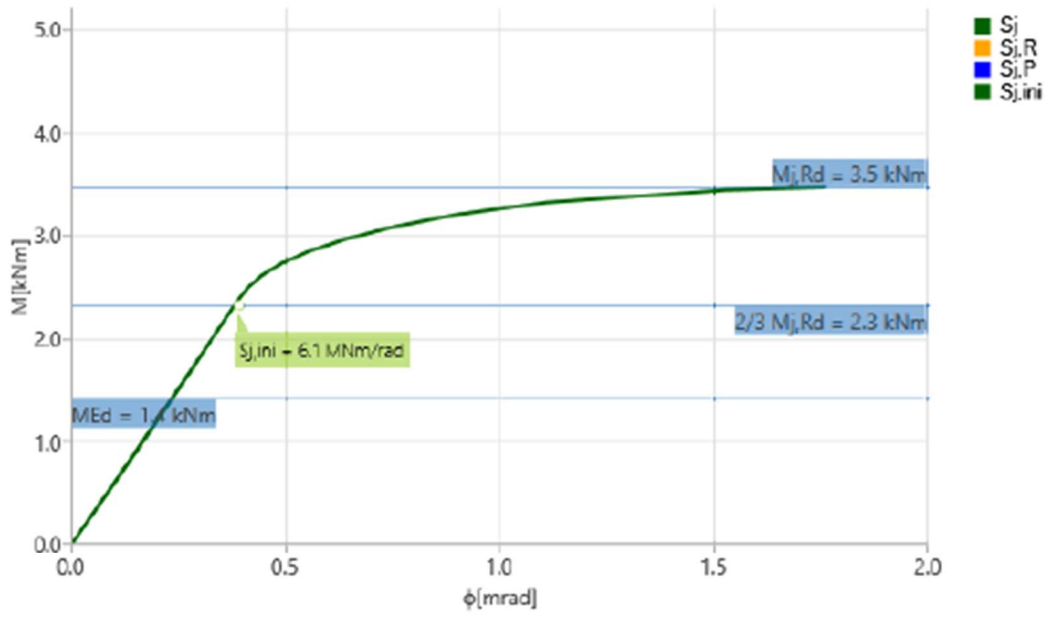


Stiffness diagram  $M_x - \phi$ . ULS-Set(15)

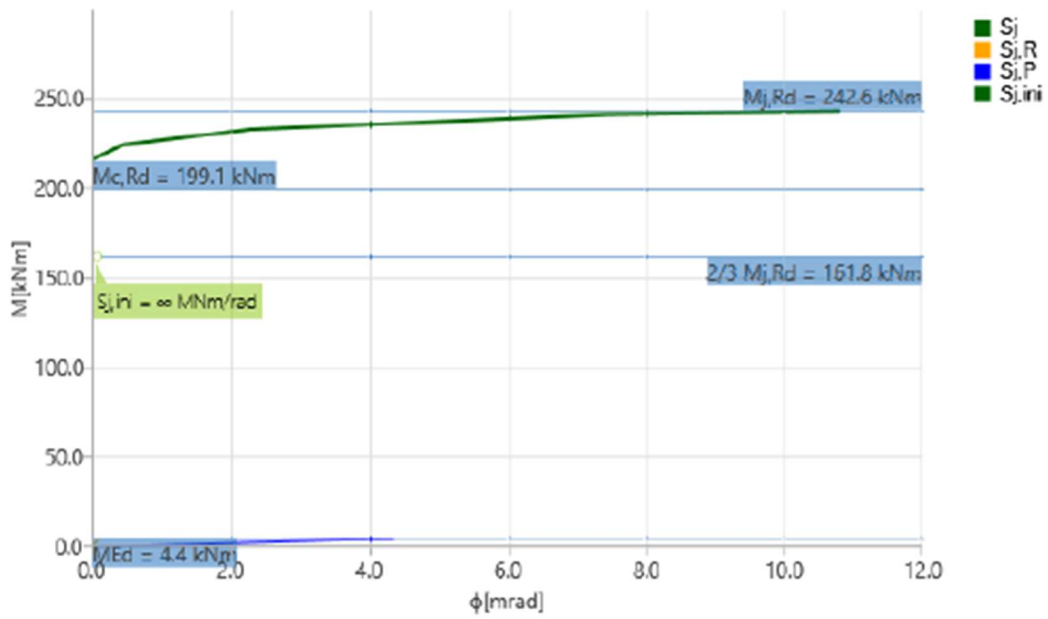


Stiffness diagram  $M_y - \phi_y$ . ULS-Set(15)

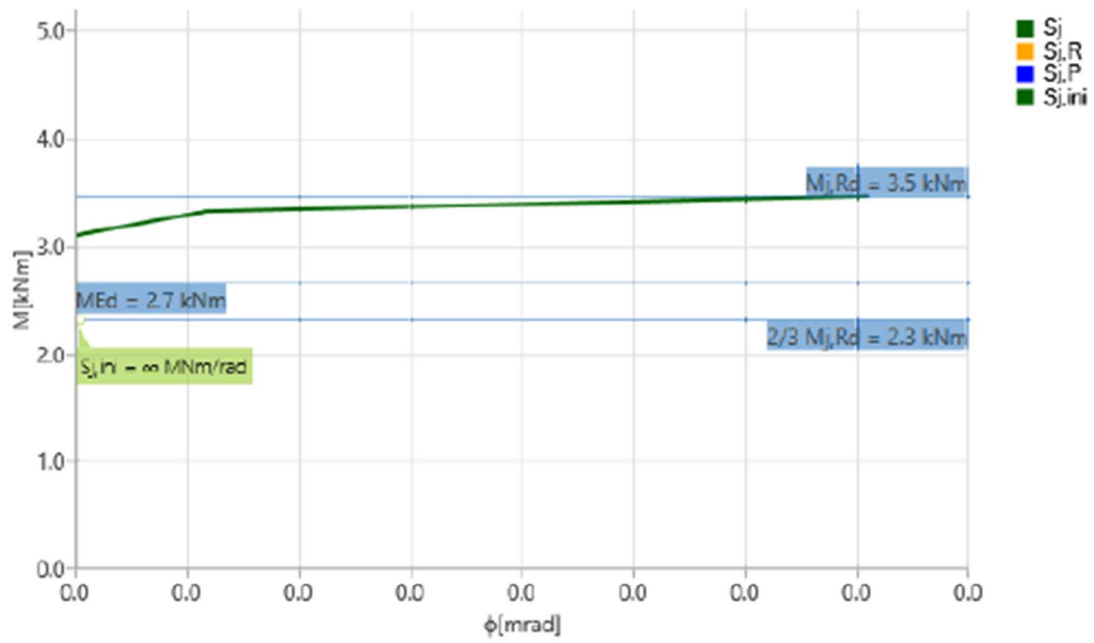


Stiffness diagram  $M_x - \phi$ , ULS-Set(17)

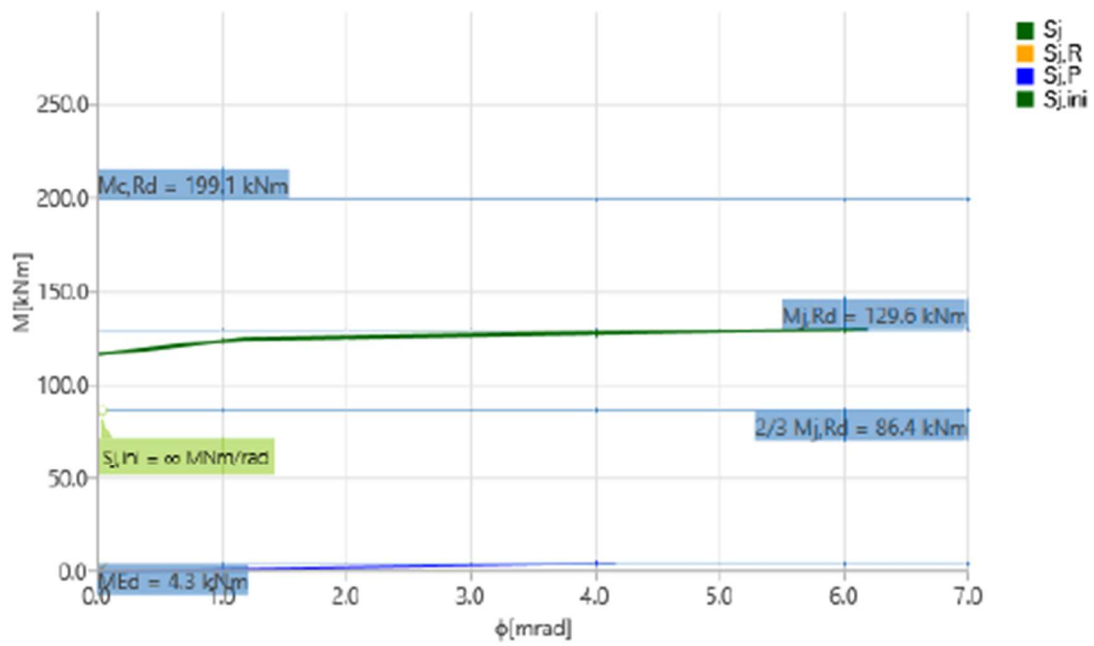


Stiffness diagram  $M_y - \phi_y$ , ULS-Set(17)

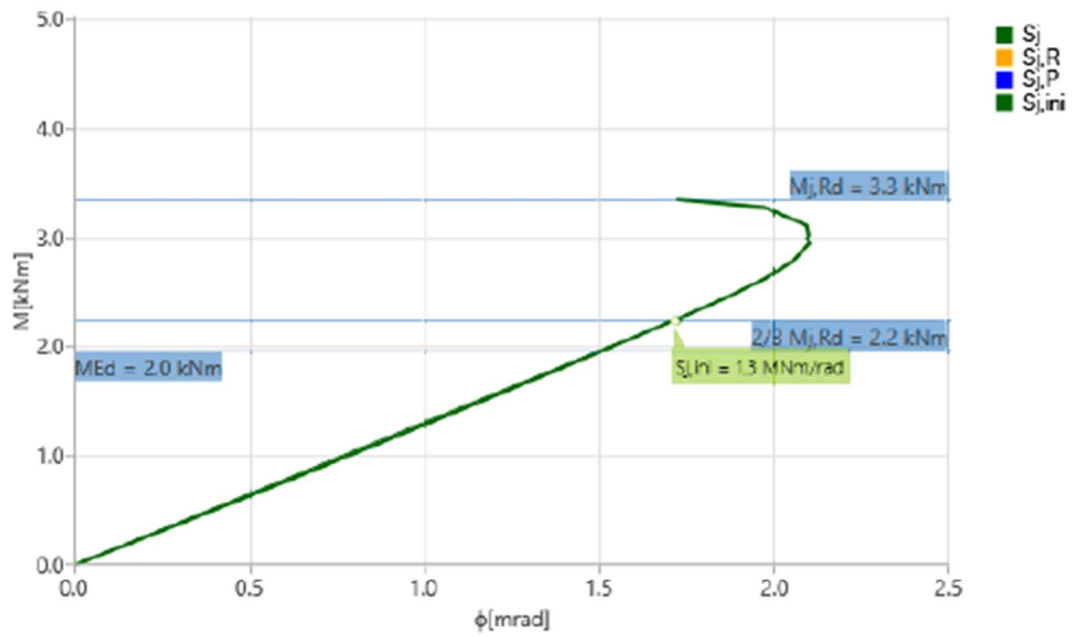


Stiffness diagram  $M_x - \phi$ , ULS-Set(19)

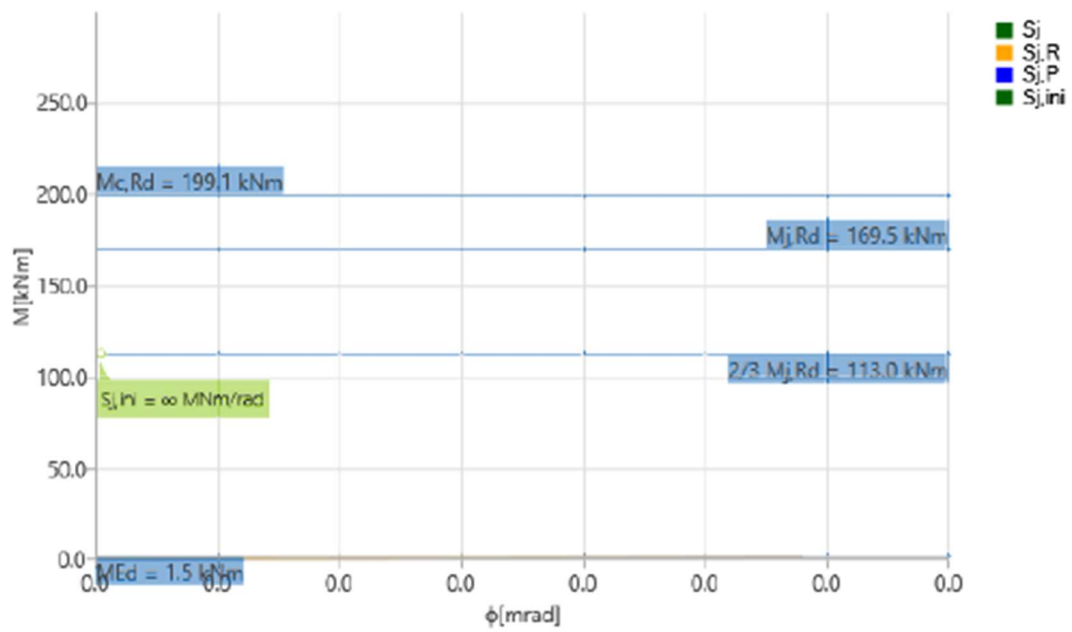

Stiffness diagram  $M_y - \phi_y$ , ULS-Set(19)


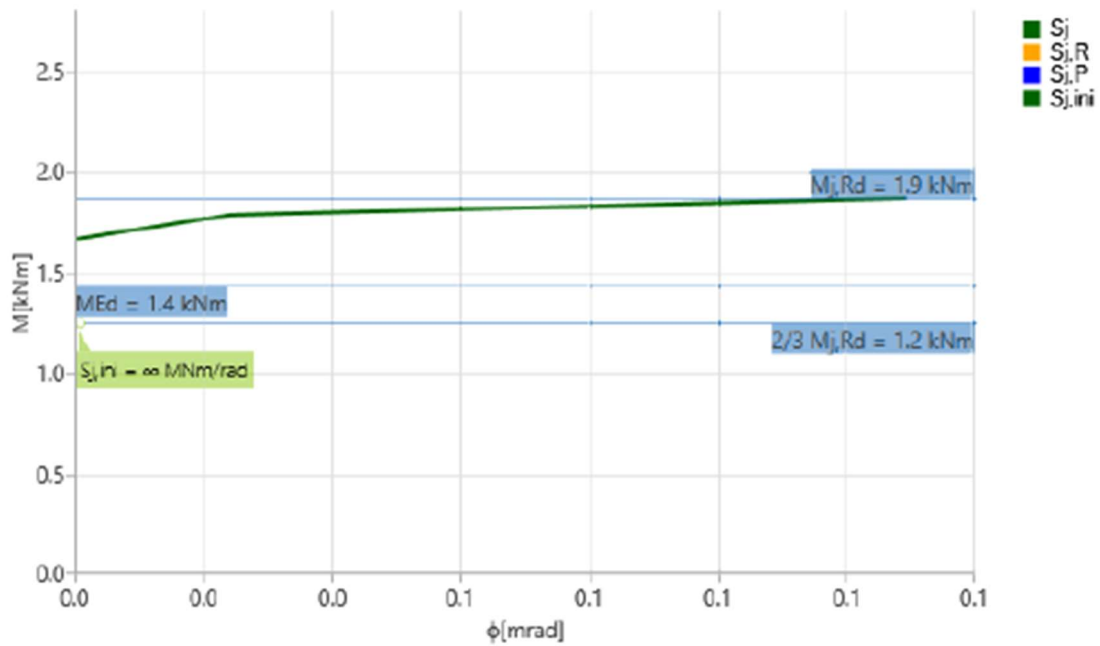




Stiffness diagram  $M_x - \phi$ , ULS-Set(21)


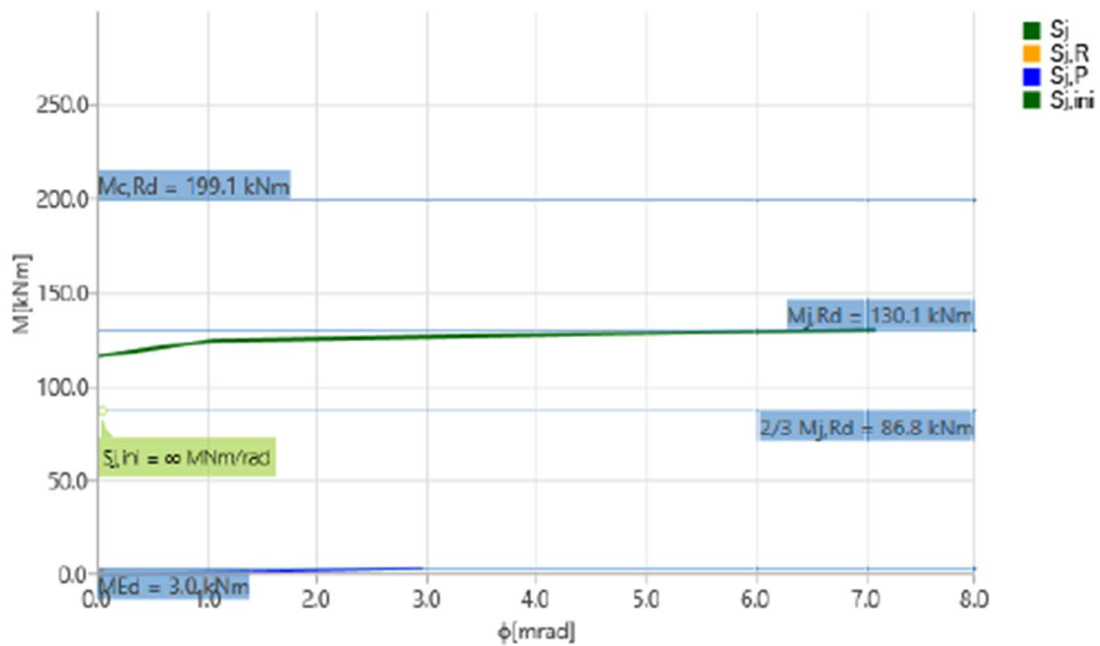




Stiffness diagram  $M_y - \phi_y$ , ULS-Set(21)




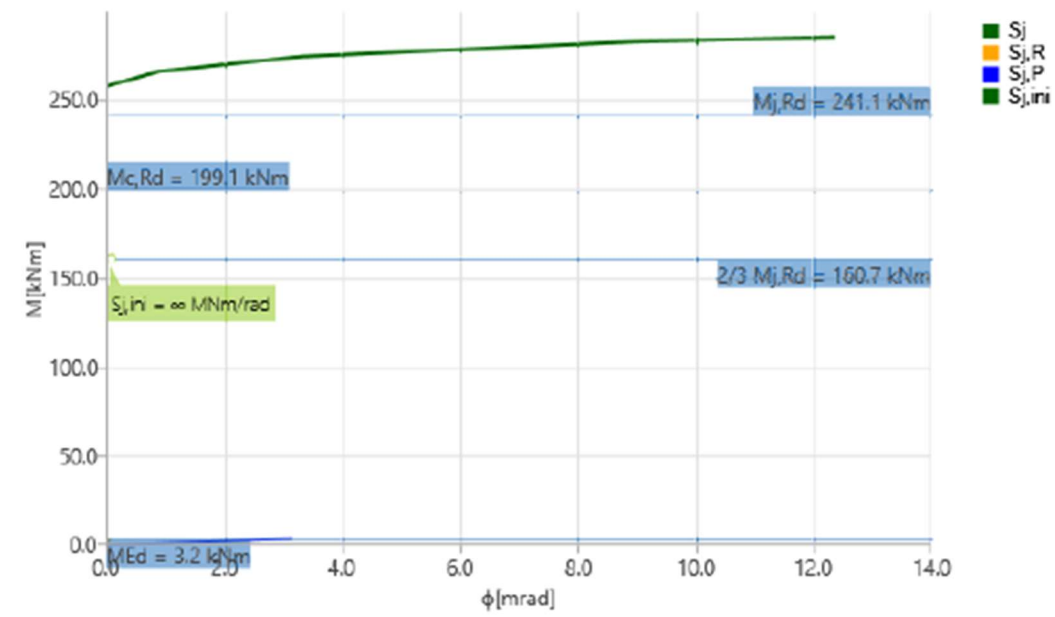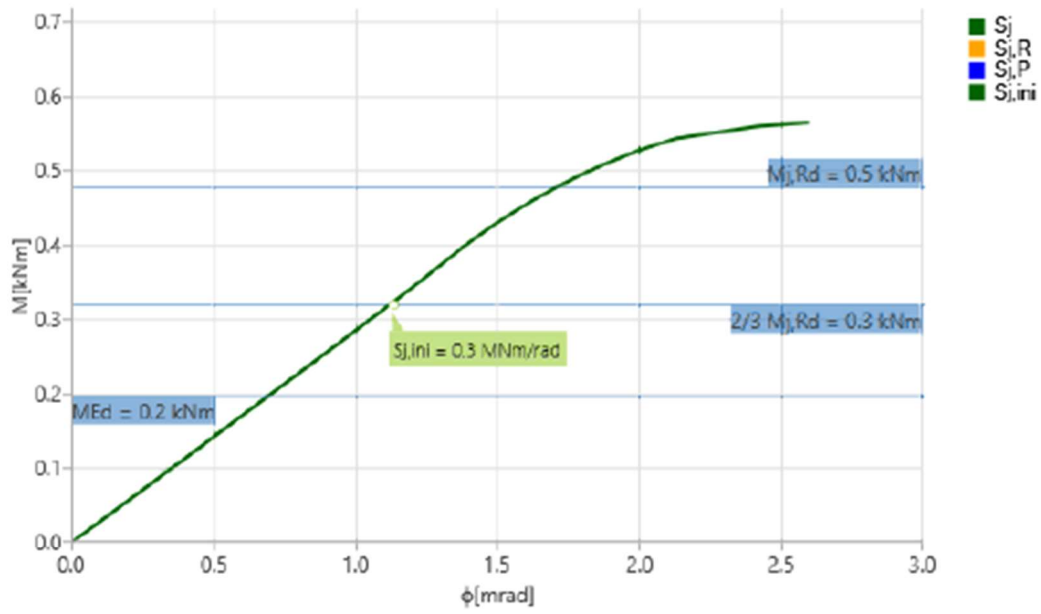

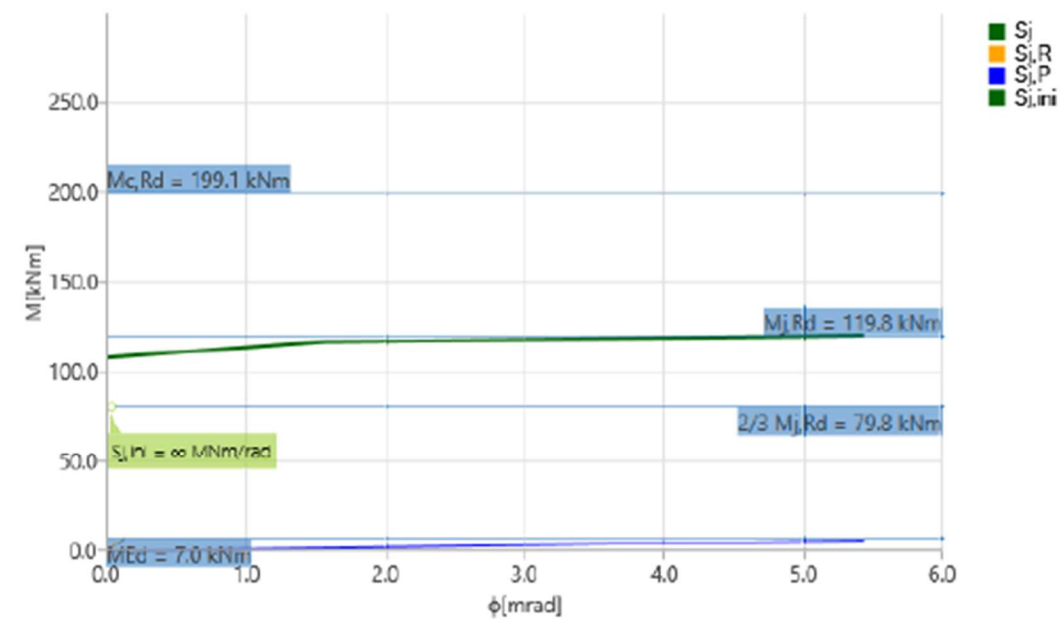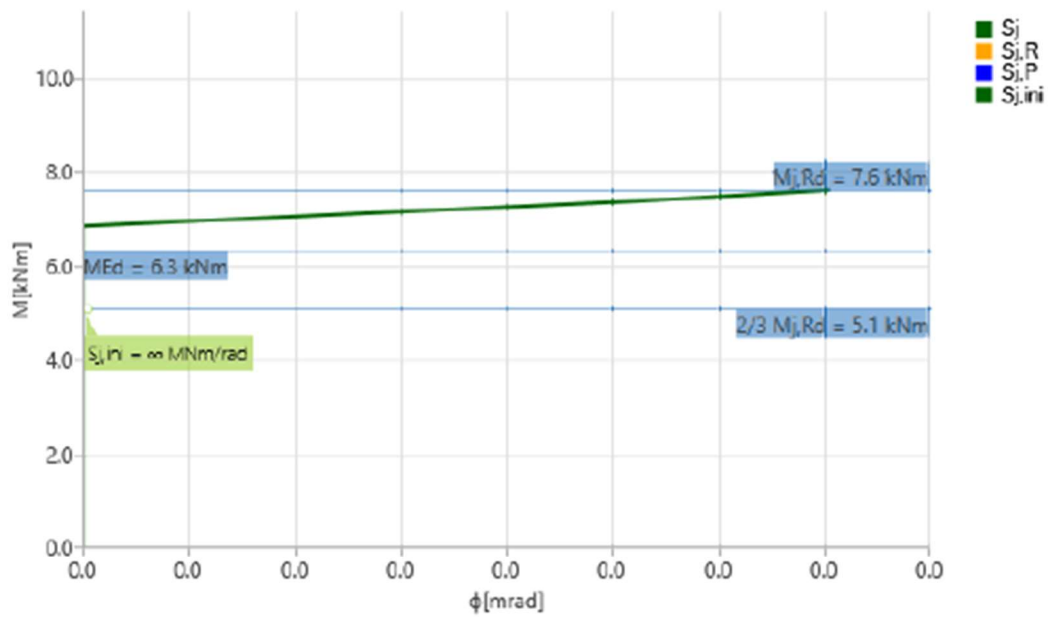


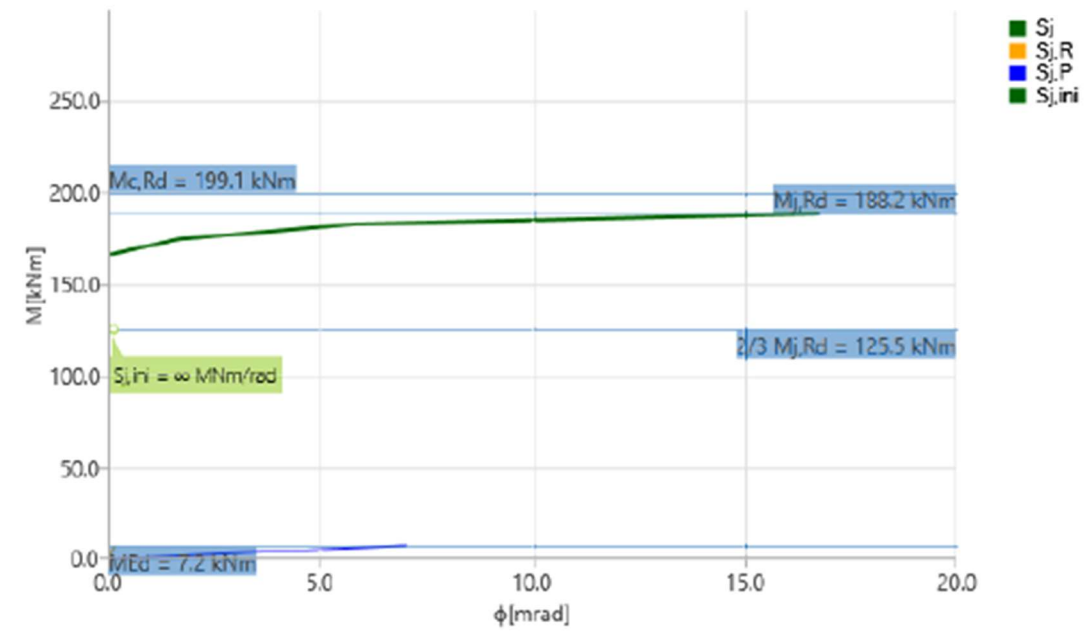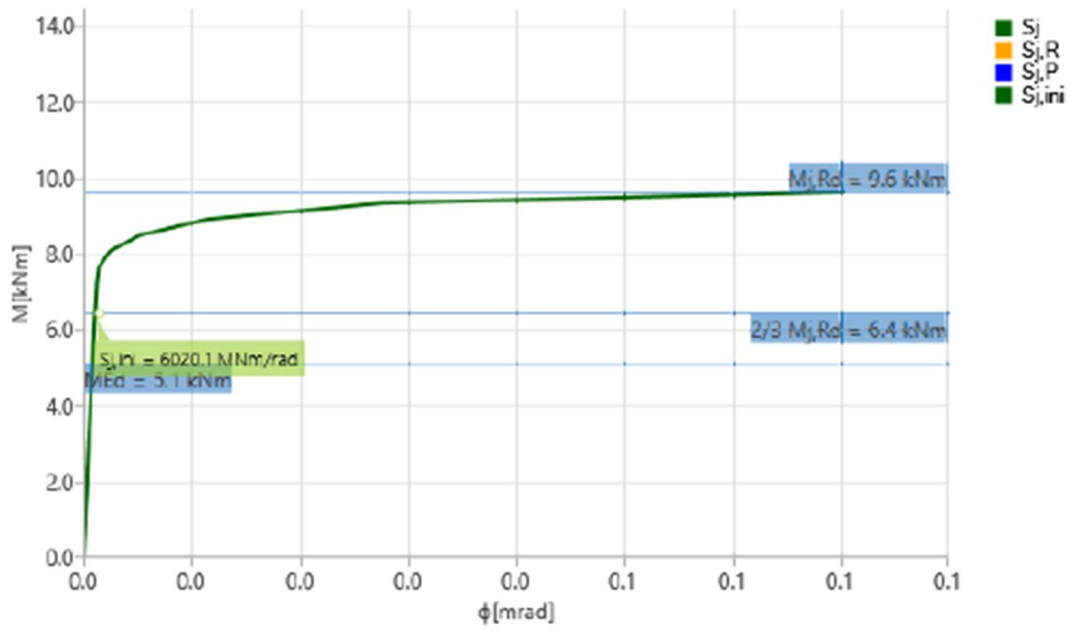

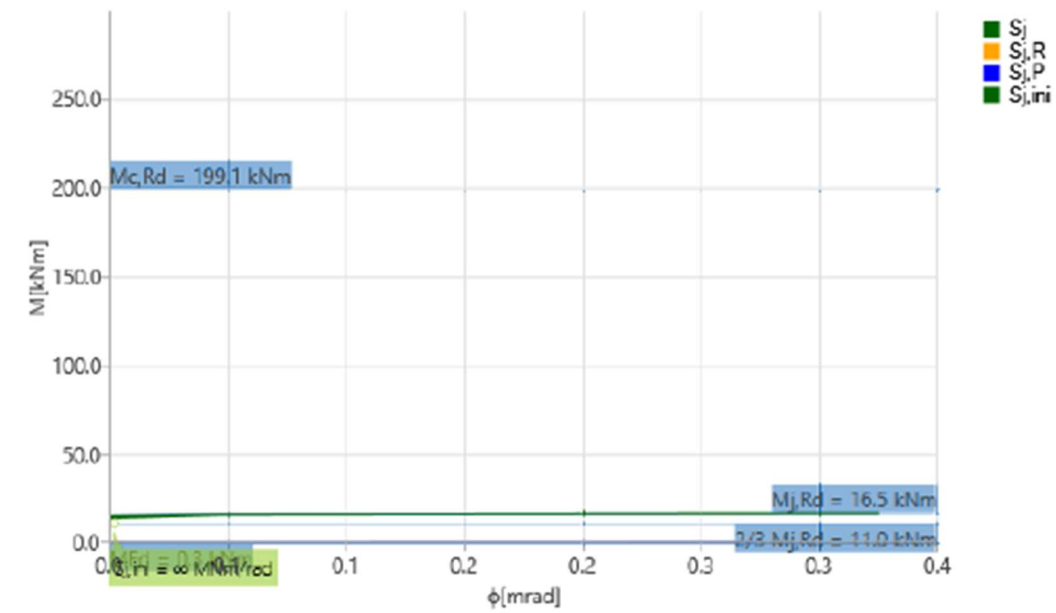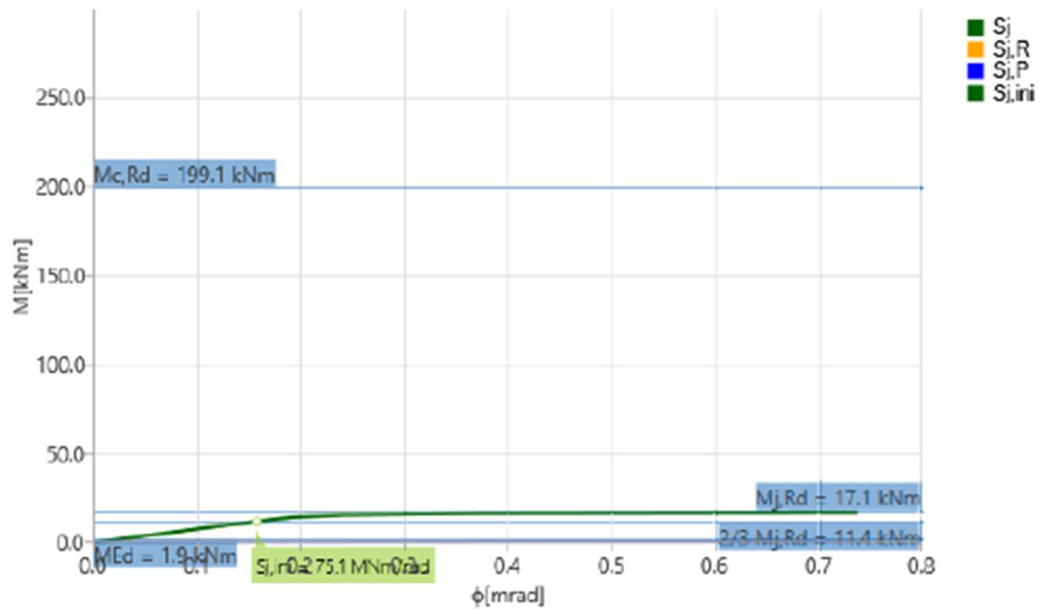


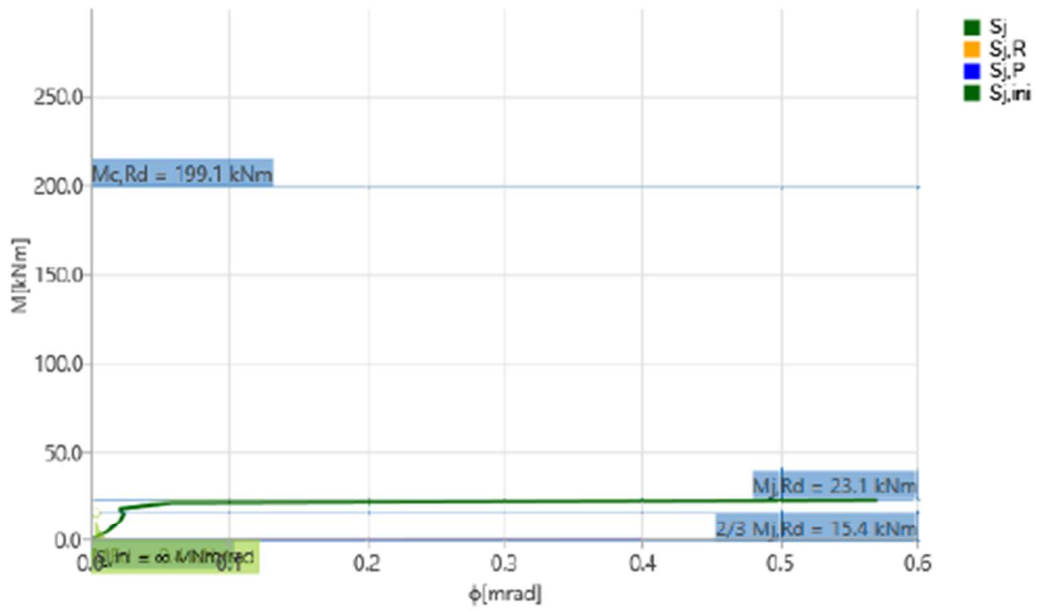


Stiffness diagram  $M_z - \phi_z$ , ULS-Set(13)

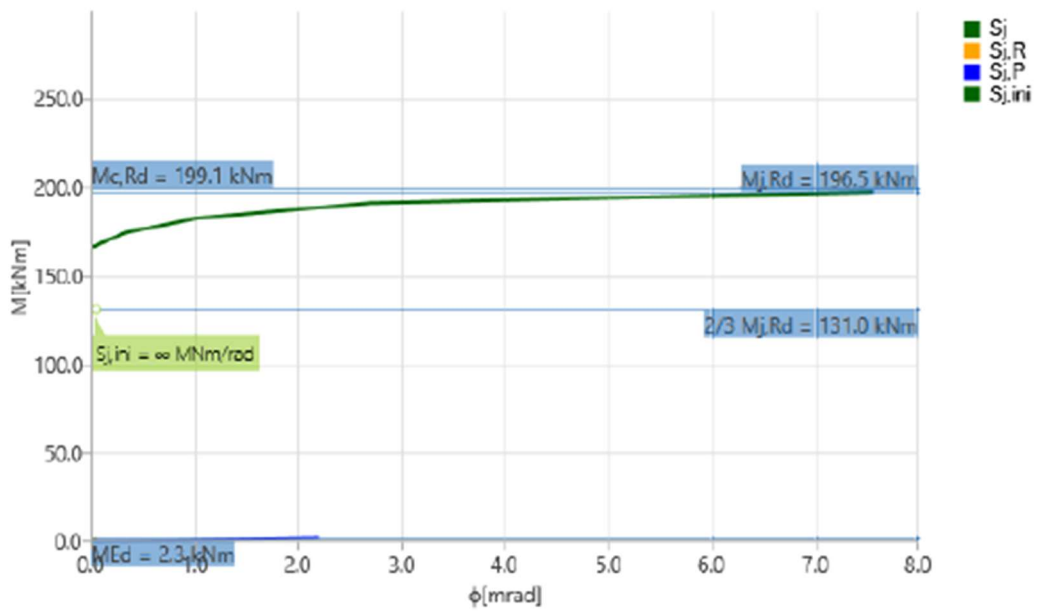


Stiffness diagram  $M_z - \phi_z$ , ULS-Set(14)

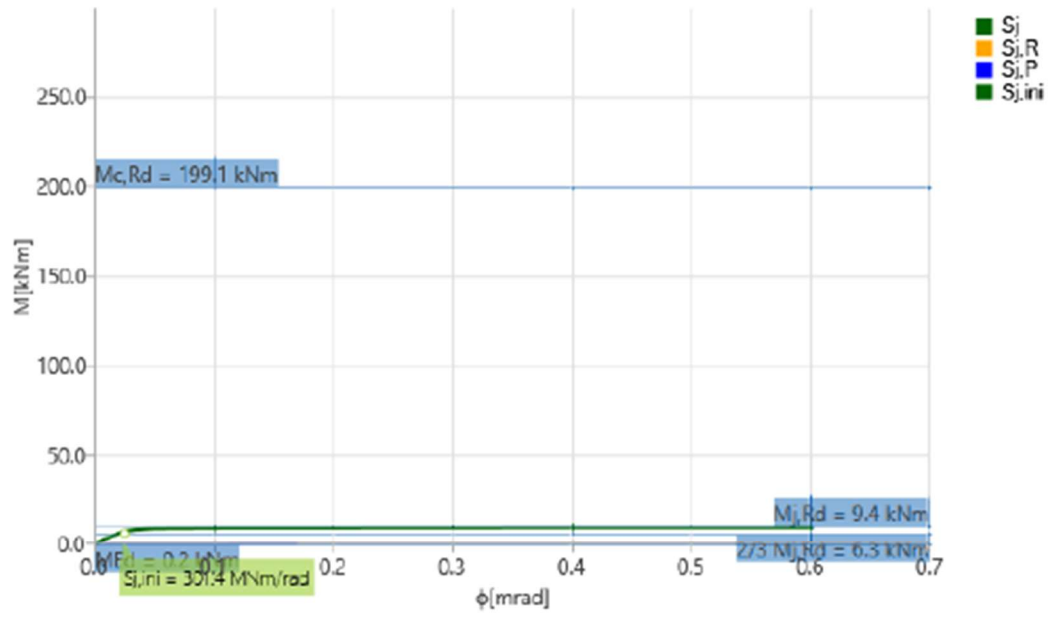


Stiffness diagram  $M_z - \phi_z$ , ULS-Set(15)

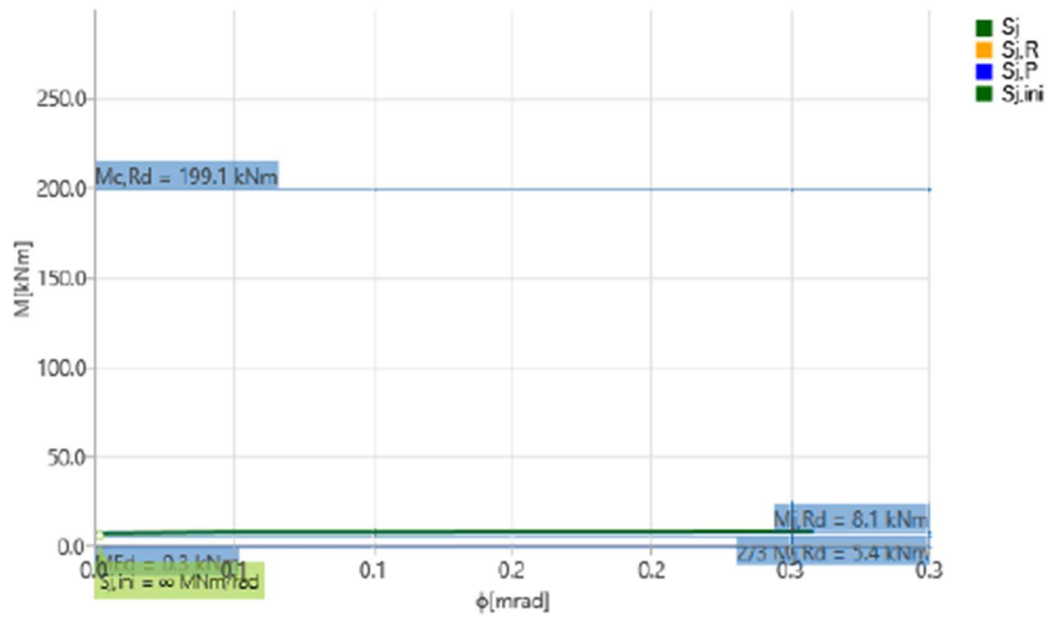


Stiffness diagram  $M_z - \phi_z$ , ULS-Set(17)

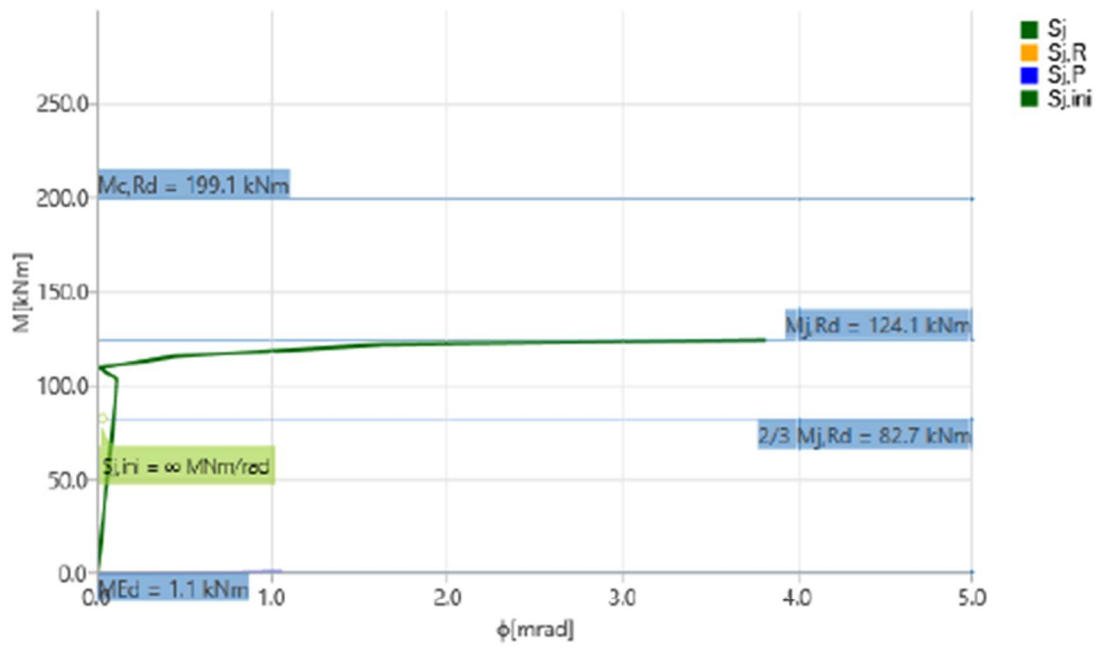


Stiffness diagram  $M_z - \phi_z$ , ULS-Set(19)

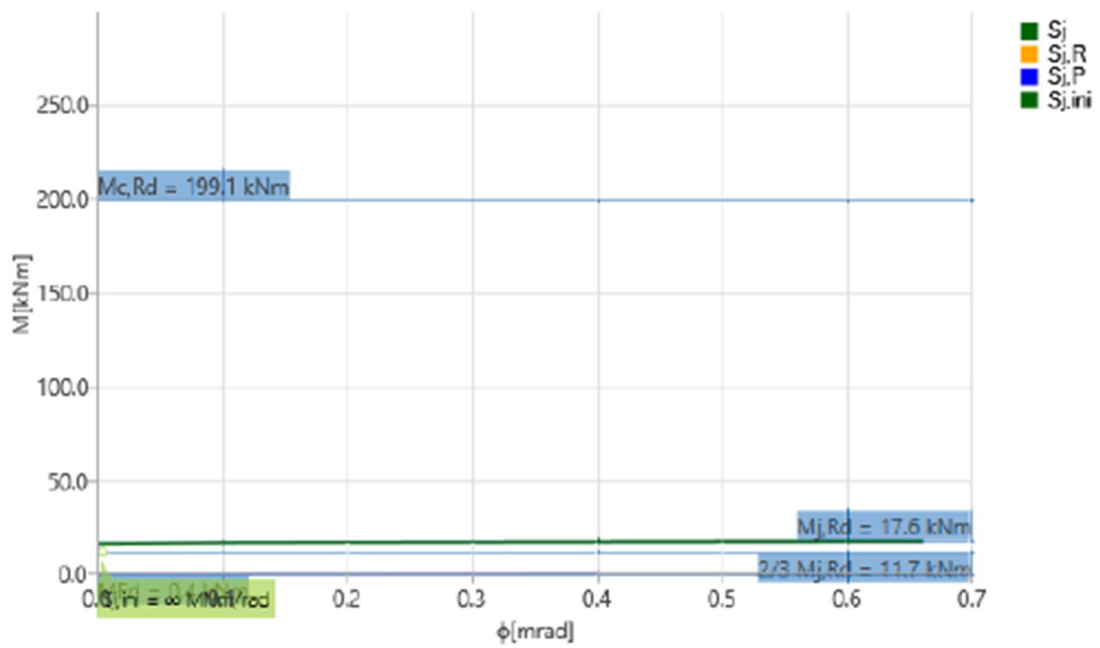

Stiffness diagram  $M_z - \phi_z$ , ULS-Set(21)

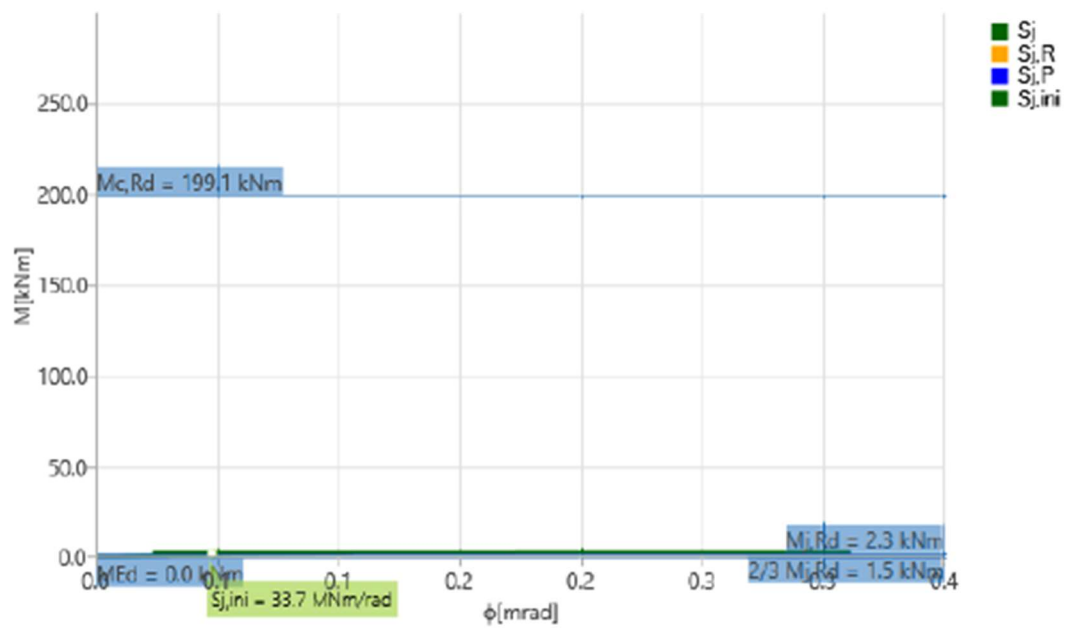


Stiffness diagram  $M_z - \phi_z$ , ULS-Set(25)

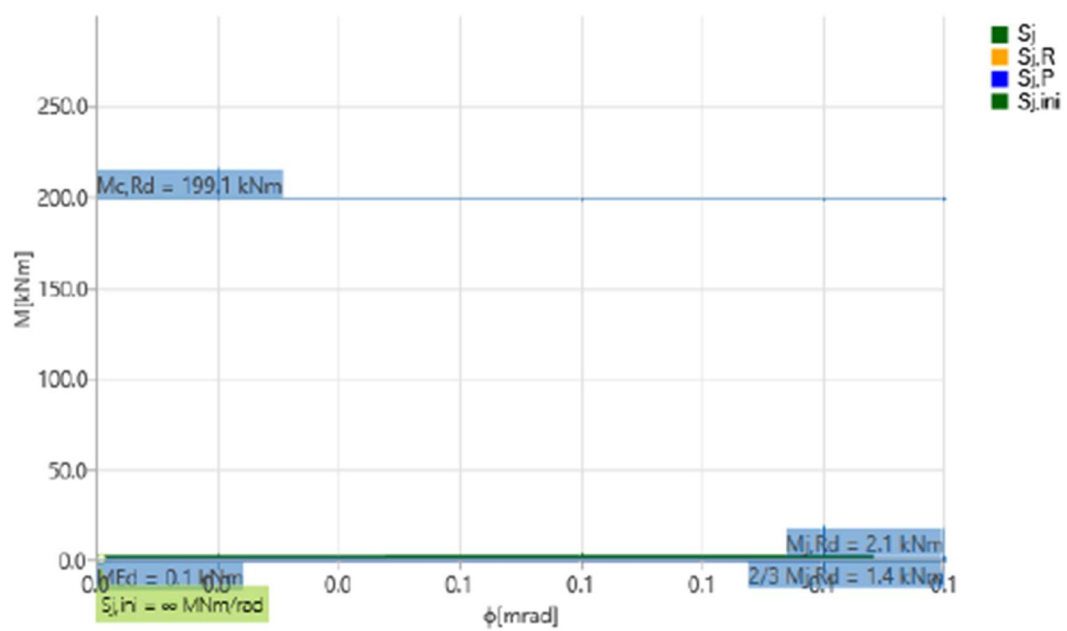

Stiffness diagram  $M_z - \phi_z$ , ULS-Set(33)


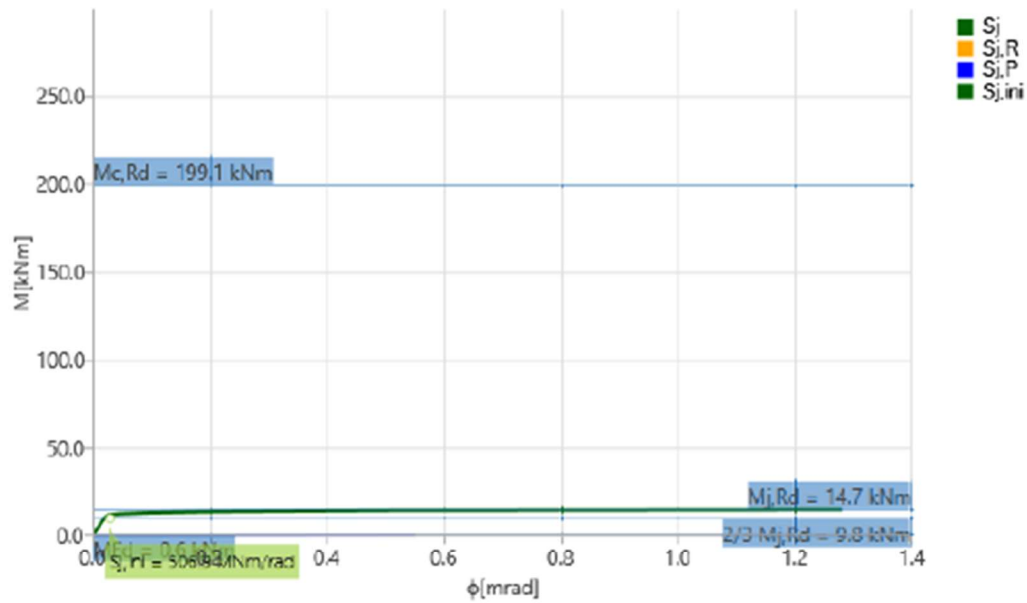




Stiffness diagram Mz -  $\phi$ z, ULS-Set(35)**Axial stiffness**


| Name  | Component | Loads       | N [kN] | N <sub>j,Rd</sub> [kN] | dx [mm] | St [MN/m] |
|-------|-----------|-------------|--------|------------------------|---------|-----------|
| B5618 | N         | ULS-Set(1)  | -34.2  | -41.5                  | 0       | 36269189  |
|       |           | ULS-Set(2)  | 35.6   | 28.0                   | 0       | 33804775  |
|       |           | ULS-Set(13) | -21.5  | -13.7                  | 0       | 20424816  |
|       |           | ULS-Set(14) | 24.9   | 49.1                   | 0       | 23608170  |
|       |           | ULS-Set(15) | -32.5  | -79.2                  | 0       | 1591      |
|       |           | ULS-Set(17) | 32.7   | 42.5                   | 0       | 31008244  |
|       |           | ULS-Set(19) | 30.3   | 51.6                   | 0       | 28739885  |
|       |           | ULS-Set(21) | 34.4   | 44.9                   | 0       | 32627689  |
|       |           | ULS-Set(25) | -30.8  | -74.5                  | 0       | 32616090  |
|       |           | ULS-Set(33) | 32.1   | 38.6                   | 0       | 30430048  |
|       |           | ULS-Set(35) | -33.1  | -62.6                  | 0       | 35069647  |

**Symbol explanation**


|                   |                                  |
|-------------------|----------------------------------|
| N <sub>j,Rd</sub> | Tension (compression) resistance |
| S <sub>t</sub>    | Secant axial stiffness           |
| δ                 | Longitudinal deformation         |

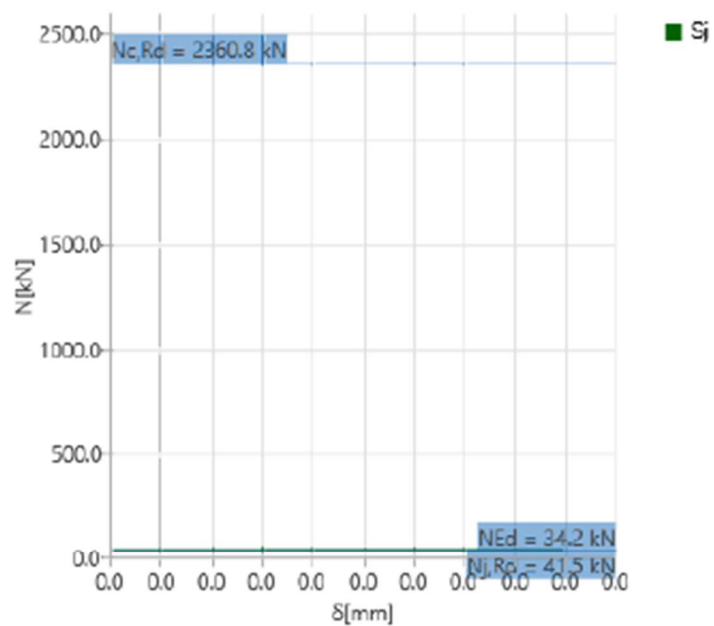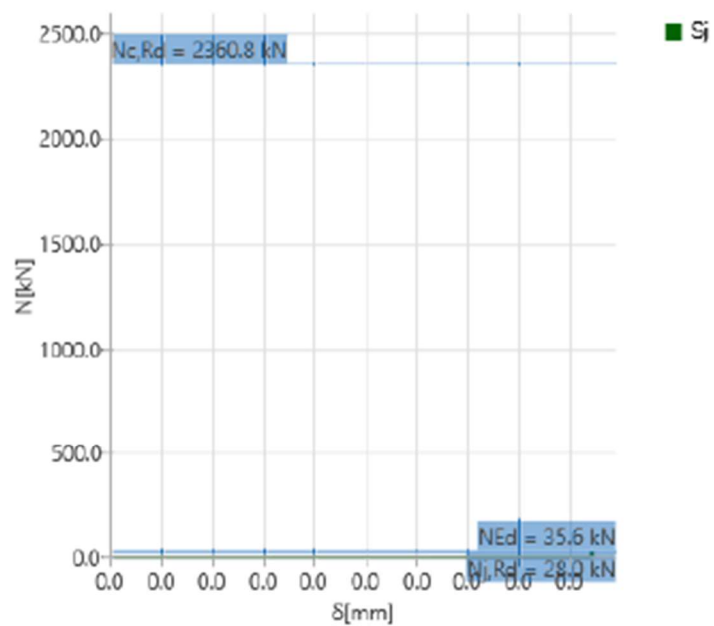Stiffness diagram N -  $\delta$ , ULS-Set(1)Stiffness diagram N -  $\delta$ , ULS-Set(2)

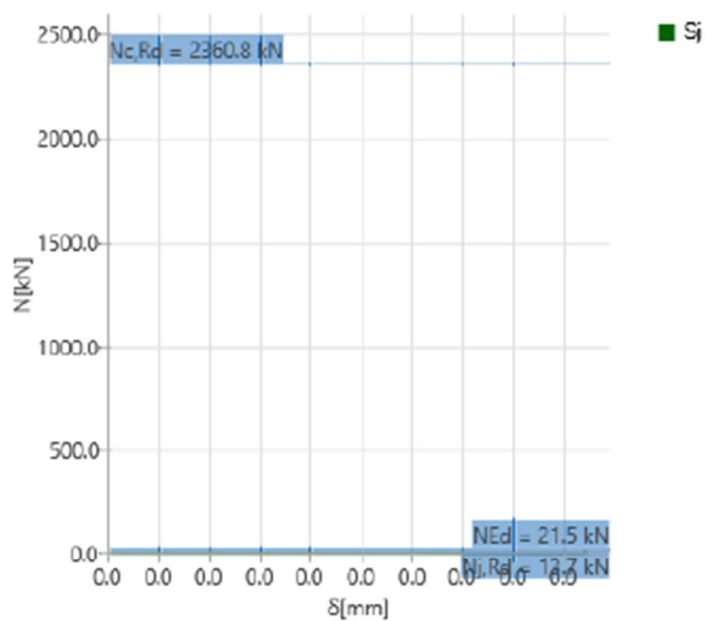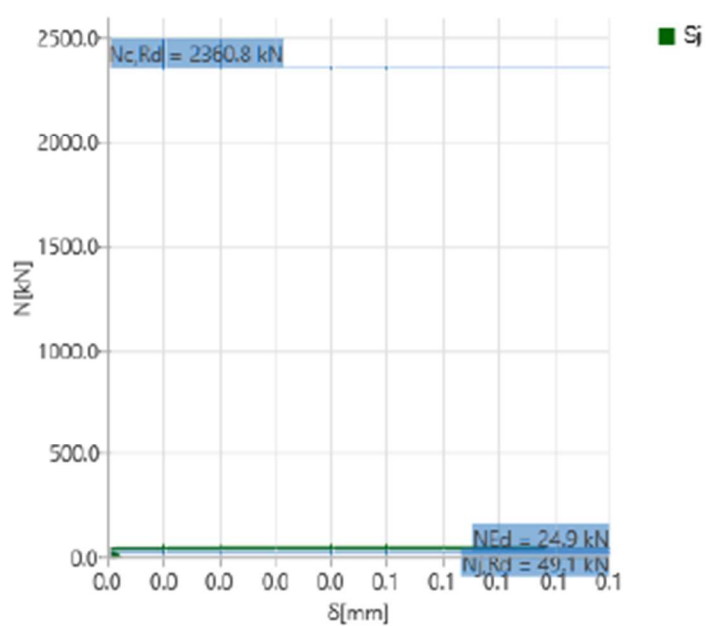
Stiffness diagram N -  $\delta$ , ULS-Set(13)Stiffness diagram N -  $\delta$ , ULS-Set(14)

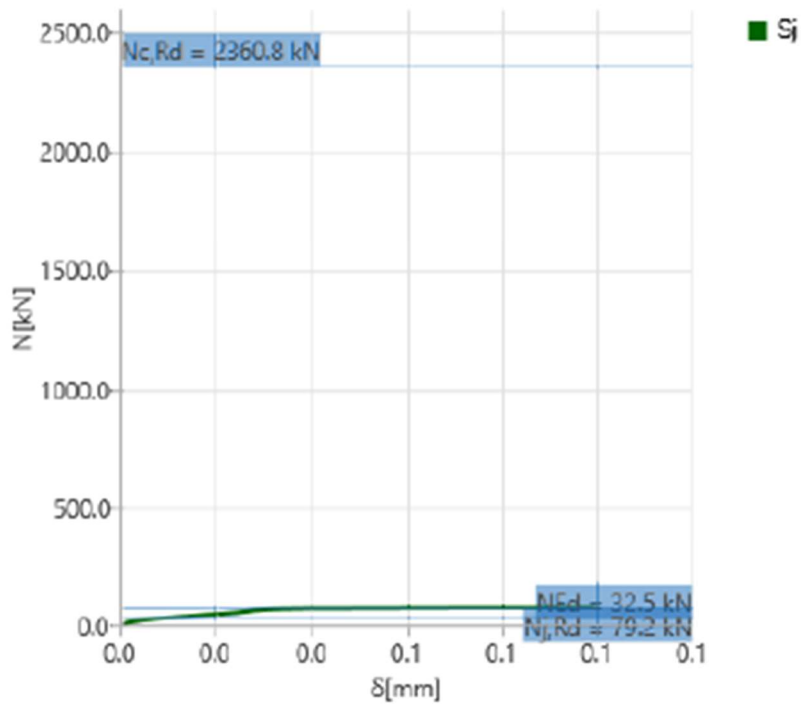


Stiffness diagram N -  $\delta$ , ULS-Set(15)

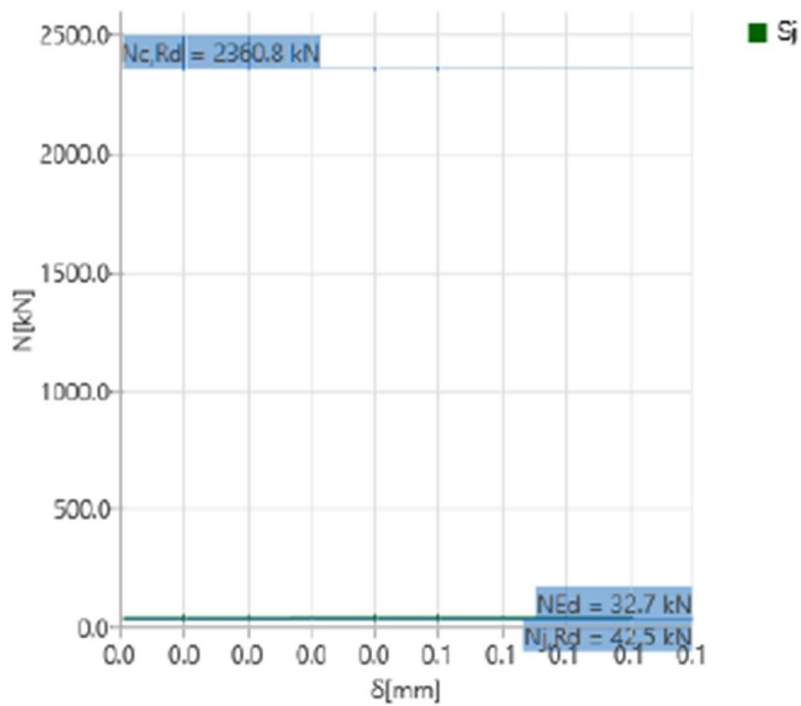


Stiffness diagram N -  $\delta$ , ULS-Set(17)

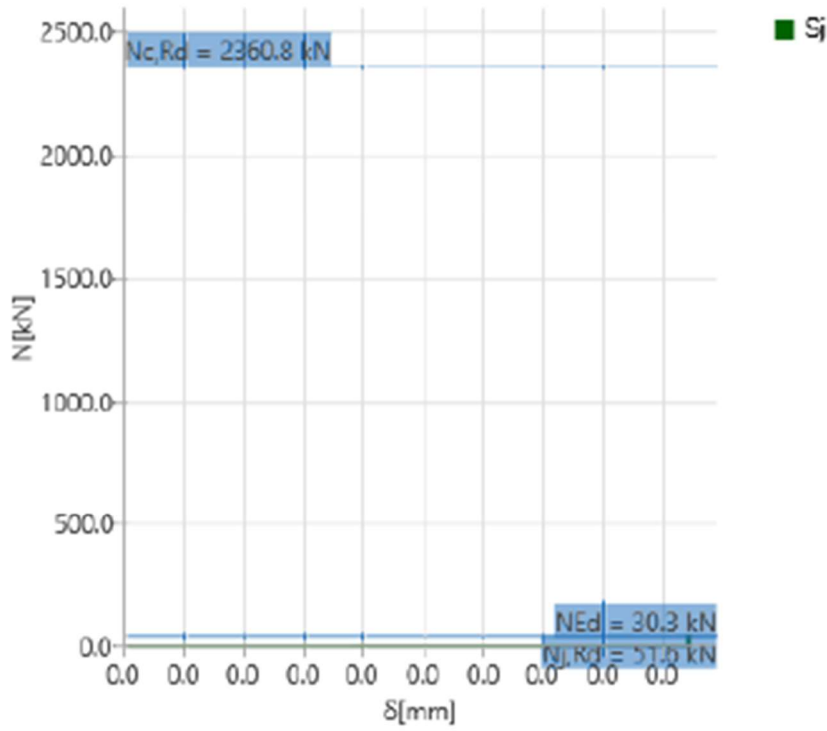


Stiffness diagram N -  $\delta$ , ULS-Set(19)

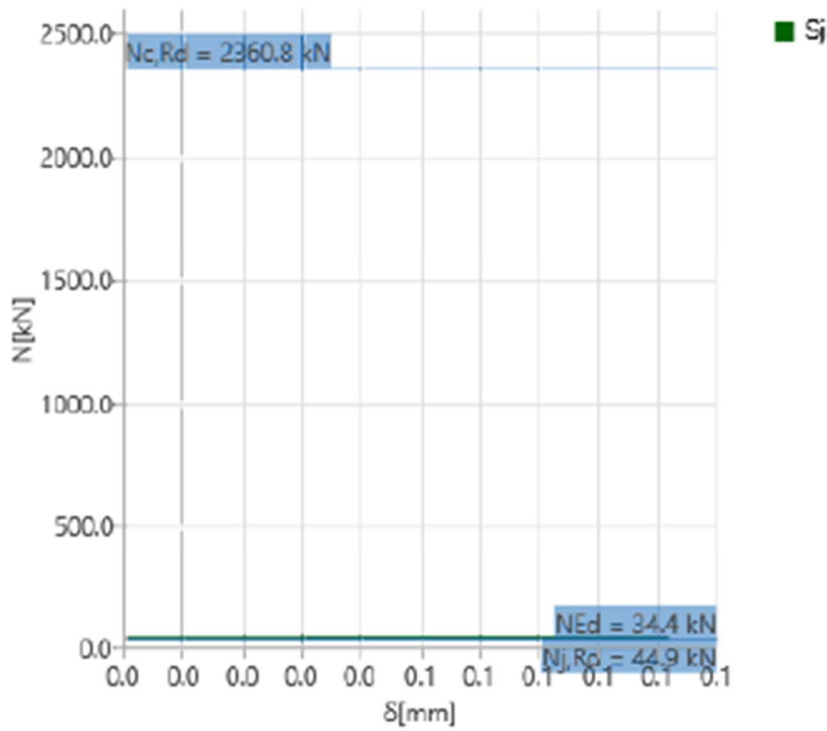


Stiffness diagram N -  $\delta$ , ULS-Set(21)

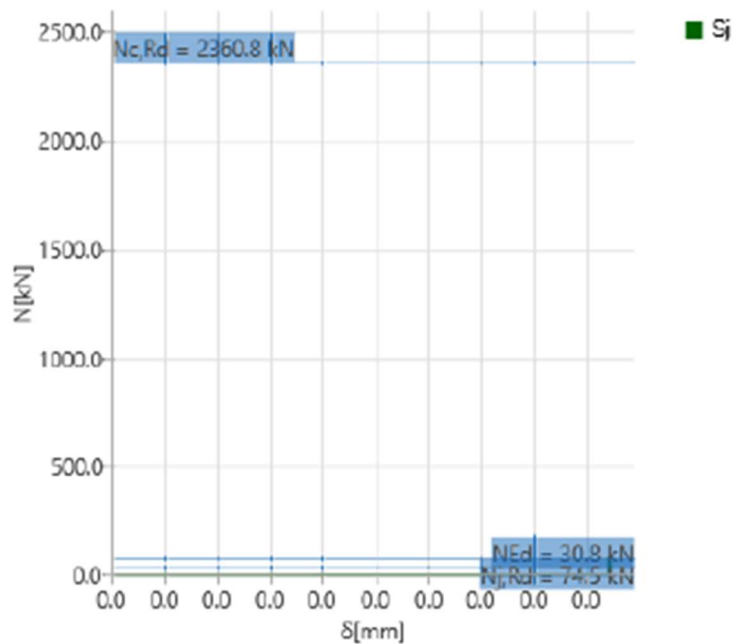

Stiffness diagram N -  $\delta$ , ULS-Set(25)

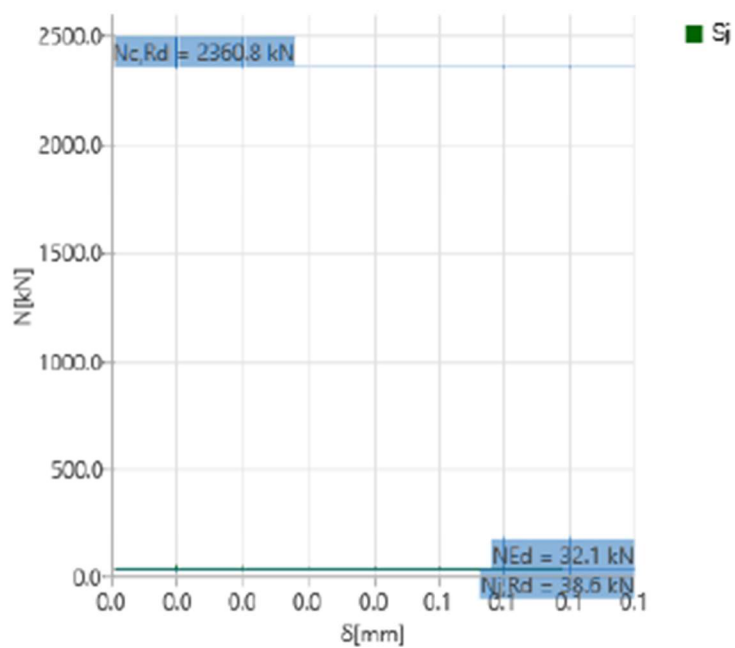

Stiffness diagram N -  $\delta$ , ULS-Set(33)

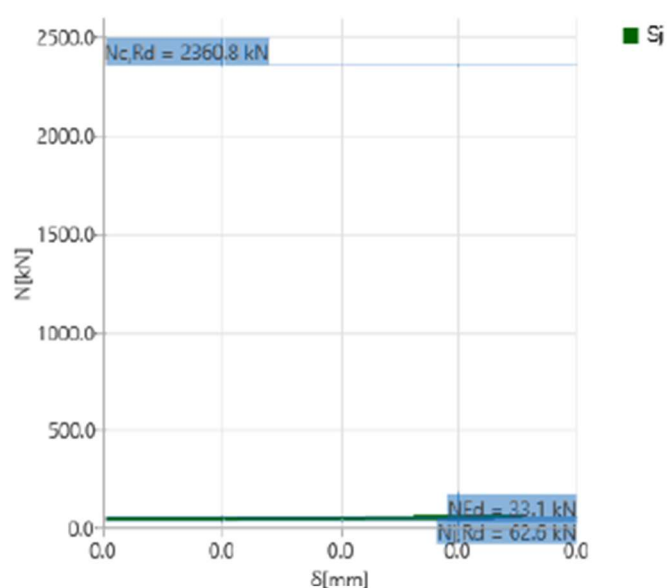Stiffness diagram N -  $\delta$ , ULS-Set(35)

### Code settings

| Item                                    | Value                  | Unit | Reference                      |
|---|------------------------|------|--------------------------------|
| YM0                                     | 1.00                   | -    | EN 1993-1-1: 6.1               |
| YM1                                     | 1.00                   | -    | EN 1993-1-1: 6.1               |
| YM2                                     | 1.25                   | -    | EN 1993-1-1: 6.1               |
| YM3                                     | 1.25                   | -    | EN 1993-1-8: 2.2               |
| Yc                                      | 1.50                   | -    | EN 1992-1-1: 2.4.2.4           |
| Yinst                                   | 1.20                   | -    | EN 1992-4: Table 4.1           |
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5             |
| Effective area - influence of mesh size | 0.10                   | -    |                                |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8                    |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7            |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5                    |
| Weld stress evaluation                  | Plastic redistribution |      |                                |
| Detailing                               | No                     |      |                                |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3           |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3           |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5 |
| Use calculated $a_b$ in bearing check.  | Yes                    |      | EN 1993-1-8: tab 3.4           |
| Cracked concrete                        | Yes                    |      | EN 1992-4                      |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1           |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1           |

| Item                            | Value | Unit | Reference  |
|---------------------------------|-------|------|--|
| Geometrical nonlinearity (GMNA) | Yes   |      | Analysis with large deformations for hollow section joints |
| Braced system                   | No    |      | EN 1993-1-8: 5.2.2.5                                       |


## 5.8. Karakteristični spoj pokrova i kosog dijela stupa „S1“

### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5697                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

### Beams and columns

| Name  | Cross-section                     | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B5536 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B5537 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 60.0                    | -120           | 50             | -150           | Position  |
| B5544 | 1 - Massive O<br>Hollow(CHS273,8) | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B5722 | 2 - CHS(cf)219.1/12.5             | 0.0                     | 0.0                  | 0.0                     | -325           | -180           | 150            | Position  |

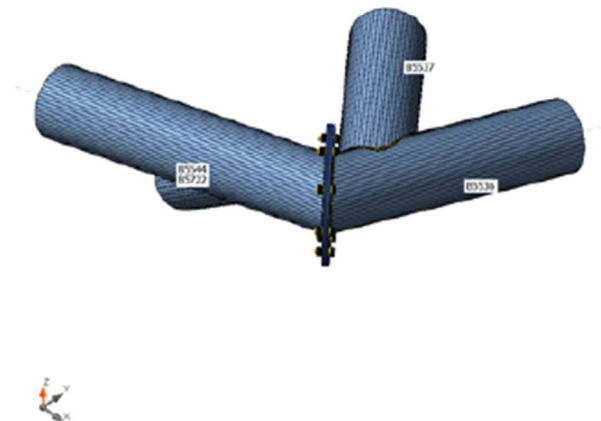

### Cross-sections

| Name                              | Material |
|-----------------------------------|----------|
| 1 - Massive O<br>Hollow(CHS273,8) | S 355    |
| 2 - CHS(cf)219.1/12.5             | S 355    |

### Bolts

| Name    | Bolt assembly | Diameter [mm] | $f_u$ [MPa] | Gross area [mm <sup>2</sup> ] |
|---------|---------------|---------------|-------------|-------------------------------|
| M20 8.8 | M20 8.8       | 20            | 800.0       | 314                           |



## Load effects (forces in equilibrium)

| Name        | Member | N<br>[kN] | Vy<br>[kN] | Vz<br>[kN] | Mx<br>[kNm] | My<br>[kNm] | Mz<br>[kNm] |
|-------------|--------|-----------|------------|------------|-------------|-------------|-------------|
| ULS-Set(1)  | B5536  | 109.7     | 1.8        | -15.9      | -5.3        | 4.6         | 6.8         |
|             | B5537  | 68.3      | -0.1       | -20.2      | 2.2         | -23.4       | -0.4        |
|             | B5544  | 149.4     | -1.0       | -3.7       | -1.5        | 1.3         | -6.6        |
|             | B5722  | 118.8     | 0.5        | 4.9        | 6.0         | 25.8        | -8.0        |
| ULS-Set(6)  | B5536  | 106.0     | 1.7        | -15.0      | -5.3        | 4.3         | 6.4         |
|             | B5537  | 67.6      | -0.1       | -19.0      | 2.1         | -22.6       | -0.4        |
|             | B5544  | 142.9     | -1.0       | -2.9       | -1.6        | 0.7         | -6.2        |
|             | B5722  | 111.7     | 0.5        | 5.1        | 5.8         | 24.6        | -7.7        |
| ULS-Set(9)  | B5536  | 98.8      | 1.7        | -12.1      | -4.2        | 5.6         | 5.9         |
|             | B5537  | 65.9      | 0.0        | -14.6      | 1.6         | -16.5       | -0.5        |
|             | B5544  | 131.5     | -0.8       | -3.1       | -1.3        | 1.8         | -5.3        |
|             | B5722  | 97.8      | 0.5        | 3.6        | 4.9         | 19.4        | -6.9        |
| ULS-Set(10) | B5536  | 102.4     | 1.7        | -13.0      | -4.2        | 5.9         | 6.3         |
|             | B5537  | 66.6      | 0.0        | -15.8      | 1.7         | -17.3       | -0.5        |
|             | B5544  | 138.0     | -0.9       | -3.9       | -1.3        | 2.4         | -5.6        |
|             | B5722  | 104.9     | 0.6        | 3.4        | 5.1         | 20.5        | -7.2        |
| ULS-Set(12) | B5536  | 107.1     | 1.8        | -15.7      | -4.8        | 5.1         | 6.9         |
|             | B5537  | 65.8      | -0.1       | -19.8      | 2.0         | -22.6       | -0.3        |
|             | B5544  | 147.1     | -1.0       | -4.7       | -1.4        | 2.5         | -6.5        |
|             | B5722  | 118.3     | 0.6        | 4.7        | 5.9         | 25.6        | -8.0        |
| ULS-Set(27) | B5536  | 62.4      | 0.9        | -13.5      | -4.1        | -0.1        | 4.3         |
|             | B5537  | 30.4      | -0.1       | -18.5      | 1.9         | -22.8       | 0.1         |
|             | B5544  | 90.8      | -0.8       | -2.8       | -0.9        | -0.4        | -5.0        |
|             | B5722  | 85.6      | 0.2        | 4.6        | 4.4         | 22.8        | -5.3        |
| ULS-Set(31) | B5536  | 63.5      | 1.0        | -14.2      | -3.6        | 0.7         | 4.8         |
|             | B5537  | 28.7      | -0.1       | -19.3      | 1.8         | -22.8       | 0.3         |
|             | B5544  | 94.9      | -0.9       | -4.6       | -0.7        | 1.4         | -5.3        |
|             | B5722  | 92.2      | 0.4        | 4.3        | 4.5         | 23.8        | -5.7        |
| ULS-Set(42) | B5536  | 71.6      | 0.9        | -8.0       | -1.8        | 5.9         | 4.5         |
|             | B5537  | 46.6      | 0.4        | -9.0       | 0.8         | -7.9        | -0.7        |
|             | B5544  | 98.4      | -0.4       | -4.1       | -0.7        | 3.4         | -3.0        |
|             | B5722  | 73.1      | 0.7        | 0.7        | 3.2         | 11.3        | -5.1        |
| ULS-Set(46) | B5536  | 70.8      | 1.5        | -10.4      | -2.7        | 4.5         | 5.9         |
|             | B5537  | 43.2      | 0.2        | -13.0      | 1.2         | -14.1       | 0.0         |
|             | B5544  | 100.5     | -1.2       | -4.8       | -0.6        | 3.4         | -4.9        |
|             | B5722  | 82.2      | 1.0        | 2.5        | 3.5         | 17.1        | -6.0        |
| ULS-Set(47) | B5536  | 86.8      | 1.4        | -11.8      | -4.2        | 3.6         | 5.1         |
|             | B5537  | 56.0      | 0.0        | -14.9      | 1.7         | -17.4       | -0.4        |
|             | B5544  | 116.5     | -0.8       | -2.1       | -1.3        | 0.3         | -5.0        |
|             | B5722  | 89.7      | 0.4        | 3.6        | 4.7         | 18.9        | -6.1        |

## Check

### Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.7 < 5.0%     | OK     |
| Bolts    | 86.6 < 100%    | OK     |
| Welds    | 98.3 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

### Plates


| Name  | Thickness [mm] | Loads      | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|-------|----------------|------------|---------------------|---------------------|----------------------|--------|
| B5536 | 8.0            | ULS-Set(1) | 253.0               | 0.0                 | 0.0                  | OK     |
| B5537 | 8.0            | ULS-Set(1) | 183.3               | 0.0                 | 0.0                  | OK     |
| B5544 | 8.0            | ULS-Set(1) | 356.4               | 0.7                 | 0.0                  | OK     |
| B5722 | 12.5           | ULS-Set(1) | 326.3               | 0.0                 | 0.0                  | OK     |
| PP1a  | 12.0           | ULS-Set(1) | 355.2               | 0.1                 | 50.4                 | OK     |
| PP1b  | 12.0           | ULS-Set(1) | 355.2               | 0.1                 | 50.4                 | OK     |

### Design data


| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |

### Symbol explanation


|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |

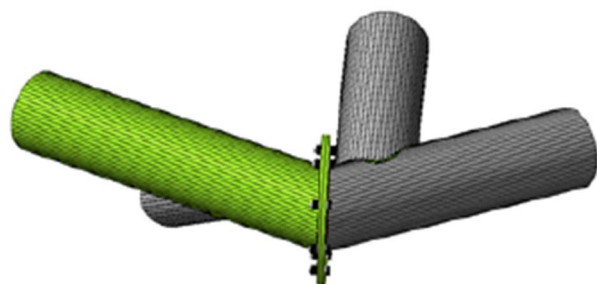


Overall check, ULS-Set(1)

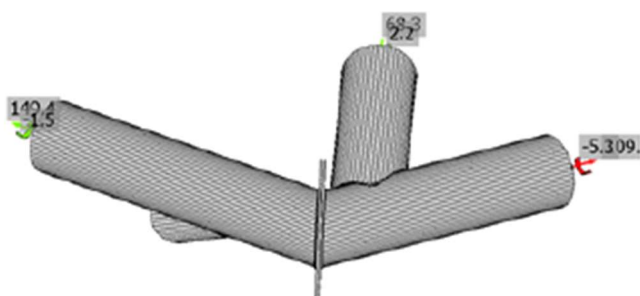

Strain check, ULS-Set(1)

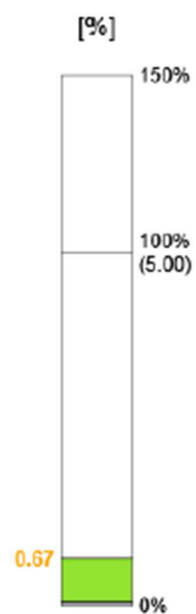

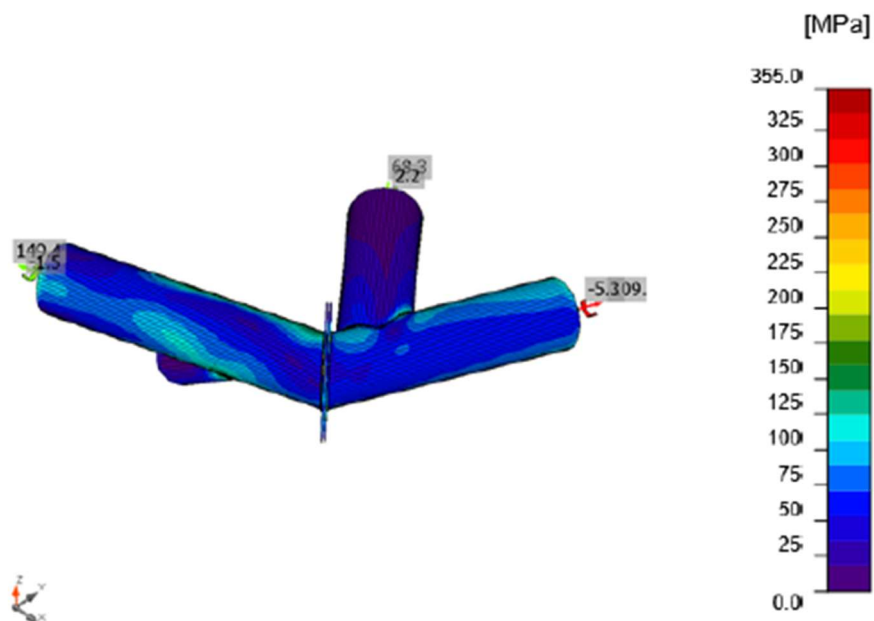

Equivalent stress, ULS-Set(1)

## Bolts

|  | Name | Loads      | $F_{t,Ed}$<br>[kN] | $V$<br>[kN] | $U_{t1}$<br>[%] | $F_{b,Rd}$<br>[kN] | $U_{t8}$<br>[%] | $U_{t18}$<br>[%] | Status |
|--|------|------------|--------------------|-------------|-----------------|--------------------|-----------------|------------------|--------|
|  | B1   | ULS-Set(1) | 80.3               | 31.8        | 56.9            | 235.2              | 33.8            | 74.4             | OK     |
|  | B2   | ULS-Set(1) | 0.0                | 29.2        | 0.0             | 235.2              | 31.1            | 31.1             | OK     |
|  | B3   | ULS-Set(1) | 0.5                | 24.9        | 0.4             | 235.2              | 26.5            | 26.8             | OK     |
|  | B4   | ULS-Set(1) | 5.4                | 19.9        | 3.8             | 235.2              | 21.2            | 23.9             | OK     |
|  | B5   | ULS-Set(1) | 35.0               | 17.2        | 24.8            | 235.2              | 18.3            | 36.0             | OK     |
|  | B6   | ULS-Set(1) | 34.4               | 20.7        | 24.3            | 235.2              | 22.0            | 39.4             | OK     |
|  | B7   | ULS-Set(1) | 46.7               | 27.0        | 33.1            | 235.2              | 28.7            | 52.3             | OK     |
|  | B8   | ULS-Set(1) | 107.7              | 30.2        | 76.3            | 235.2              | 32.1            | 86.6             | OK     |

## Design data

| Name        | $F_{t,Rd}$<br>[kN] | $B_{p,Rd}$<br>[kN] | $F_{v,Rd}$<br>[kN] |
|-------------|--------------------|--------------------|--------------------|
| M20 8.8 - 1 | 141.1              | 279.3              | 94.1               |

## Symbol explanation

|            |   |
|------------|---|
| $F_{t,Rd}$ | Bolt tension resistance EN 1993-1-8 tab. 3.4  |
| $F_{t,Ed}$ | Tension force                                 |
| $B_{p,Rd}$ | Punching shear resistance                     |
| $V$        | Resultant of shear forces $V_y, V_z$ in bolt  |
| $F_{v,Rd}$ | Bolt shear resistance EN 1993-1-8 table 3.4   |
| $F_{b,Rd}$ | Plate bearing resistance EN 1993-1-8 tab. 3.4 |
| $U_t$      | Utilization in tension                        |
| $U_s$      | Utilization in shear                          |

## Welds (Plastic redistribution)

| Item         | Edge  | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | $U_t$ [%] | $U_c$ [%] | Status |
|--------------|-------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|-----------|-----------|--------|
| PP1a         | B5536 | ▲4.0            | 934         | ULS-Set(1) | 428.2                 | 0.8                 | 191.2                  | -149.7                   | -162.9               | 98.3      | 37.1      | OK     |
| PP1b         | B5544 | ▲4.0            | 934         | ULS-Set(1) | 428.2                 | 0.8                 | 185.5                  | -97.6                    | -200.3               | 98.3      | 38.6      | OK     |
| B5536-arc 52 | B5537 | ▲3.0▲           | 967         | ULS-Set(1) | 388.7                 | 0.0                 | 7.6                    | -104.8                   | -185.2               | 84.6      | 17.1      | OK     |
| B5544-arc 39 | B5722 | ▲6.0            | 803         | ULS-Set(1) | 427.0                 | 0.1                 | -158.1                 | 141.2                    | -180.3               | 98.0      | 43.9      | OK     |
|              |       | ▲3.0▲           | 967         | ULS-Set(1) | 169.8                 | 0.0                 | -126.7                 | -32.3                    | 56.7                 | 39.0      | 16.4      | OK     |

## Design data

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | $0.9 \sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

## Symbol explanation

|                    |   |
|--------------------|---|
| $\epsilon_{pl}$    | Strain  |
| $\sigma_{w,Ed}$    | Equivalent stress   |
| $\sigma_{w,Rd}$    | Equivalent stress resistance                                    |
| $\sigma_{\perp}$   | Perpendicular stress  |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$       | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$          | Correlation factor EN 1993-1-8 tab. 4.1                         |
| $U_t$              | Utilization   |
| $U_c$              | Weld capacity utilization                                       |

## Buckling

Buckling analysis was not calculated.

## Code settings

| Item | Value | Unit | Reference        |
|------|-------|------|------------------|
| YM0  | 1.00  | -    | EN 1993-1-1: 6.1 |
| YM1  | 1.00  | -    | EN 1993-1-1: 6.1 |
| YM2  | 1.25  | -    | EN 1993-1-1: 6.1 |

| Item  | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| Y <sub>M3</sub>                                 | 1.25                   | -    | EN 1993-1-8: 2.2   |
| Y <sub>c</sub>                                  | 1.50                   | -    | EN 1992-1-1: 2.4.2.4                                       |
| Y <sub>inst</sub>                               | 1.20                   | -    | EN 1992-4: Table 4.1                                       |
| Joint coefficient β <sub>j</sub>                | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size         | 0.10                   | -    |  |
| Friction coefficient - concrete                 | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance         | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                            | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                          | Plastic redistribution |      |  |
| Detailing                                       | No                     |      |  |
| Distance between bolts [d]                      | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]             | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check              | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated a <sub>b</sub> in bearing check. | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                                | Yes                    |      | EN 1992-4  |
| Local deformation check                         | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                         | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)                 | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braaced system                                  | No                     |      | EN 1993-1-8: 5.2.2.5                                       |

## 5.9. Vlačni spoj rubnog stupa „S2“


### Project item Con N5944

#### Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5944                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

#### Beams and columns

| Name  | Cross-section        | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|----------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B6256 | 1 - CHS(cf)355.6/8.0 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B6257 | 1 - CHS(cf)355.6/8.0 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |

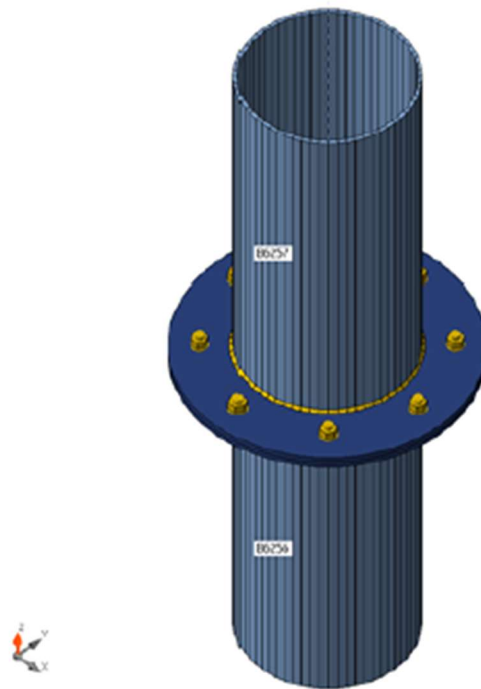

#### Cross-sections

| Name                 | Material |
|----------------------|----------|
| 1 - CHS(cf)355.6/8.0 | S 355    |

#### Bolts

| Name    | Bolt assembly | Diameter [mm] | $f_u$ [MPa] | Gross area [mm <sup>2</sup> ] |
|---------|---------------|---------------|-------------|-------------------------------|
| M20 8.8 | M20 8.8       | 20            | 800.0       | 314                           |



## Load effects (forces in equilibrium)

| Name        | Member | N [kN] | Vy [kN] | Vz [kN] | Mx [kNm] | My [kNm] | Mz [kNm] |
|-------------|--------|--------|---------|---------|----------|----------|----------|
| ULS-Set(2)  | B6256  | 302.9  | 0.0     | 1.3     | -0.7     | -5.3     | -3.5     |
|             | B6257  | -302.9 | 0.0     | -1.3    | 0.7      | 5.3      | 3.5      |
| ULS-Set(27) | B6256  | 301.8  | 0.1     | 1.4     | -1.0     | -5.4     | -3.1     |
|             | B6257  | -301.8 | -0.1    | -1.4    | 1.0      | 5.4      | 3.1      |
| ULS-Set(30) | B6256  | 299.4  | 0.1     | 1.0     | -0.1     | -4.8     | -3.5     |
|             | B6257  | -299.4 | -0.1    | -1.0    | 0.1      | 4.8      | 3.5      |

## Check

## Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.0 < 5.0%     | OK     |
| Bolts    | 0.8 < 100%     | OK     |
| Welds    | 27.9 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

## Plates

| Name  | Thickness [mm] | Loads       | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|-------|----------------|-------------|---------------------|---------------------|----------------------|--------|
| B6256 | 8.0            | ULS-Set(2)  | 50.8                | 0.0                 | 0.0                  | OK     |
| B6257 | 8.0            | ULS-Set(2)  | 48.2                | 0.0                 | 0.0                  | OK     |
| PP1a  | 12.0           | ULS-Set(27) | 2.9                 | 0.0                 | 4.0                  | OK     |
| PP1b  | 12.0           | ULS-Set(27) | 2.8                 | 0.0                 | 4.0                  | OK     |


## Design data

| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |


## Symbol explanation

|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |




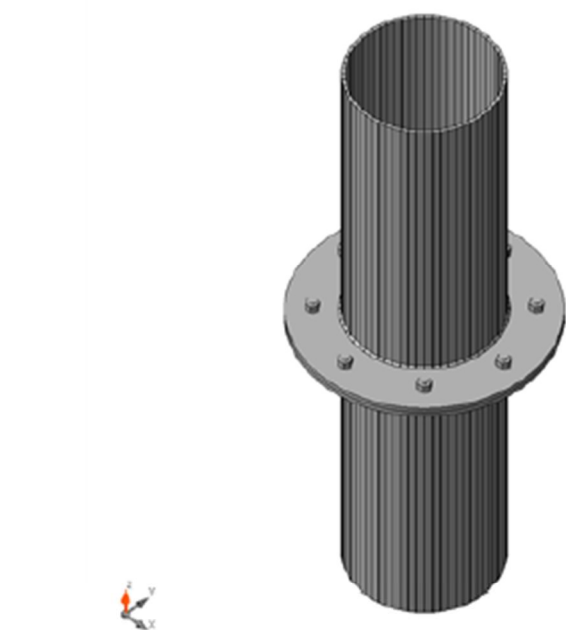


Overall check, ULS-Set(2)

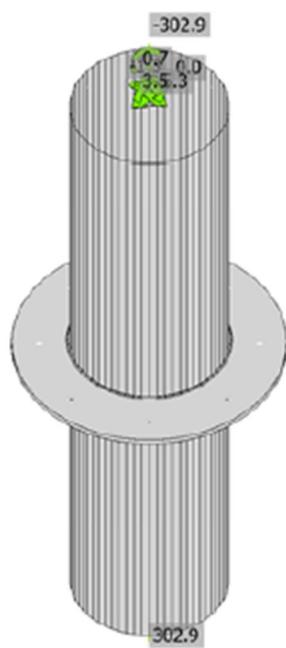

Strain check, ULS-Set(2)

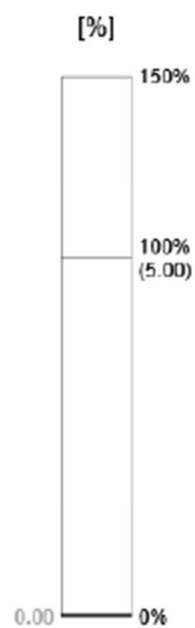

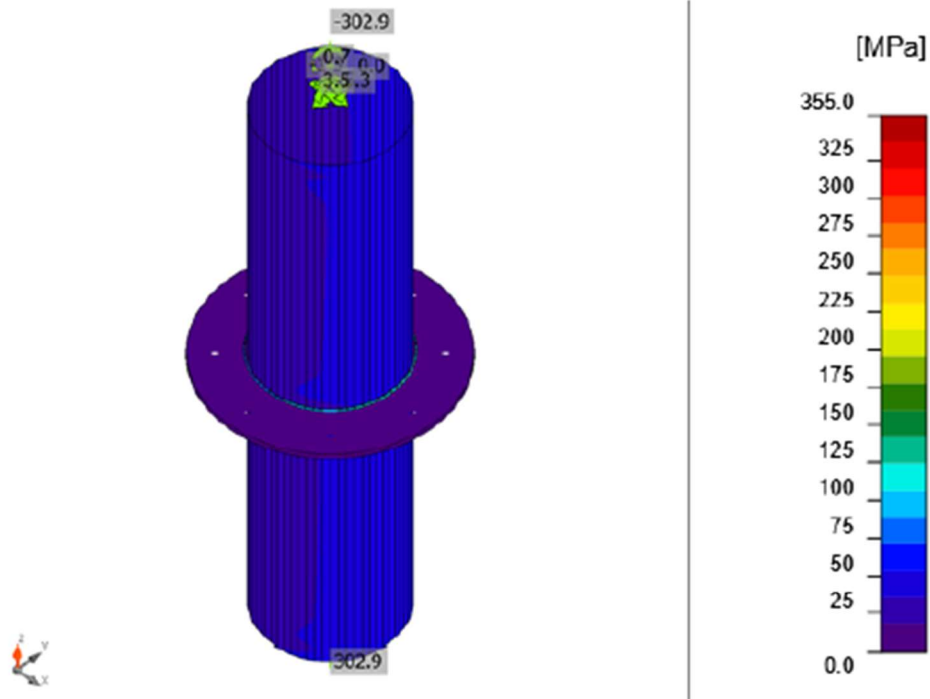

Equivalent stress, ULS-Set(2)

**Bolts**

|  | Name | Loads       | $F_{t,Ed}$ [kN] | V [kN] | $U_{t1}$ [%] | $F_{b,Rd}$ [kN] | $U_{t2}$ [%] | $U_{t3}$ [%] | Status |
|--|------|-------------|-----------------|--------|--------------|-----------------|--------------|--------------|--------|
|  | B1   | ULS-Set(27) | 0.1             | 0.4    | 0.1          | 235.2           | 0.4          | 0.4          | OK     |
|  | B2   | ULS-Set(27) | 0.1             | 0.4    | 0.1          | 235.2           | 0.5          | 0.5          | OK     |
|  | B3   | ULS-Set(27) | 0.1             | 0.6    | 0.0          | 235.2           | 0.6          | 0.7          | OK     |
|  | B4   | ULS-Set(27) | 0.1             | 0.7    | 0.0          | 235.2           | 0.7          | 0.8          | OK     |
|  | B5   | ULS-Set(27) | 0.1             | 0.7    | 0.1          | 235.2           | 0.8          | 0.8          | OK     |
|  | B6   | ULS-Set(27) | 0.1             | 0.7    | 0.1          | 235.2           | 0.7          | 0.8          | OK     |
|  | B7   | ULS-Set(27) | 0.1             | 0.6    | 0.1          | 235.2           | 0.6          | 0.6          | OK     |
|  | B8   | ULS-Set(27) | 0.1             | 0.4    | 0.1          | 235.2           | 0.4          | 0.5          | OK     |

**Design data**

| Name        | $F_{t,Rd}$ [kN] | $B_{p,Rd}$ [kN] | $F_{v,Rd}$ [kN] |
|-------------|-----------------|-----------------|-----------------|
| M20 8.8 - 1 | 141.1           | 279.3           | 94.1            |

**Symbol explanation**

|            |   |
|------------|---|
| $F_{t,Rd}$ | Bolt tension resistance EN 1993-1-8 tab. 3.4  |
| $F_{t,Ed}$ | Tension force                                 |
| $B_{p,Rd}$ | Punching shear resistance                     |
| $V$        | Resultant of shear forces $V_y, V_z$ in bolt  |
| $F_{v,Rd}$ | Bolt shear resistance EN_1993-1-8 table 3.4   |
| $F_{b,Rd}$ | Plate bearing resistance EN 1993-1-8 tab. 3.4 |
| $U_t$      | Utilization in tension                        |
| $U_s$      | Utilization in shear                          |

**Welds (Plastic redistribution)**

| Item | Edge  | Throat th. [mm] | Length [mm] | Loads      | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | $U_t$ [%] | $U_{tc}$ [%] | Status |
|------|-------|-----------------|-------------|------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|-----------|--------------|--------|
| PP1a | B6256 | ▲4.0            | 1092        | ULS-Set(2) | 121.7                 | 0.0                 | -63.6                  | 0.2                      | 59.9                 | 27.9      | 22.2         | OK     |
| PP1b | B6257 | ▲4.0            | 1092        | ULS-Set(2) | 121.5                 | 0.0                 | -63.5                  | 1.1                      | 59.8                 | 27.9      | 22.2         | OK     |

**Design data**

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | $0.9 \sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

**Symbol explanation**

|                    |   |
|--------------------|---|
| $\epsilon_{pl}$    | Strain  |
| $\sigma_{w,Ed}$    | Equivalent stress   |
| $\sigma_{w,Rd}$    | Equivalent stress resistance                                    |
| $\sigma_{\perp}$   | Perpendicular stress  |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$       | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$          | Corelation factor EN 1993-1-8 tab. 4.1                          |
| $U_t$              | Utilization   |
| $U_{tc}$           | Weld capacity utilization                                       |

**Buckling**

Buckling analysis was not calculated.

**Code settings**

| Item  | Value | Unit | Reference            |
|-------|-------|------|----------------------|
| YM0   | 1.00  | -    | EN 1993-1-1: 6.1     |
| YM1   | 1.00  | -    | EN 1993-1-1: 6.1     |
| YM2   | 1.25  | -    | EN 1993-1-1: 6.1     |
| YM3   | 1.25  | -    | EN 1993-1-8: 2.2     |
| YC    | 1.50  | -    | EN 1992-1-1: 2.4.2.4 |
| Yinst | 1.20  | -    | EN 1992-4: Table 4.1 |

| Item                                    | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| Joint coefficient $\beta_j$             | 0.67                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size | 0.10                   | -    |  |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                  | Plastic redistribution |      |  |
| Detailing                               | No                     |      |  |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated $a_b$ in bearing check.  | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                        | Yes                    |      | EN 1992-4  |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)         | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                           | No                     |      | EN 1993-1-8: 5.2.2.5                                       |

## 5.10. Vlačni spoj trostrukog stupa „S1“


## Project item Con N5943

## Design

|             |                                      |
|-------------|--------------------------------------|
| Name        | Con N5943                            |
| Description |                                      |
| Analysis    | Stress, strain/ loads in equilibrium |

## Beams and columns

| Name  | Cross-section         | $\beta$ - Direction [°] | $\gamma$ - Pitch [°] | $\alpha$ - Rotation [°] | Offset ex [mm] | Offset ey [mm] | Offset ez [mm] | Forces in |
|-------|-----------------------|-------------------------|----------------------|-------------------------|----------------|----------------|----------------|-----------|
| B6254 | 1 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |
| B6255 | 1 - CHS(cf)219.1/12.5 | 0.0                     | 0.0                  | 0.0                     | 0              | 0              | 0              | Position  |

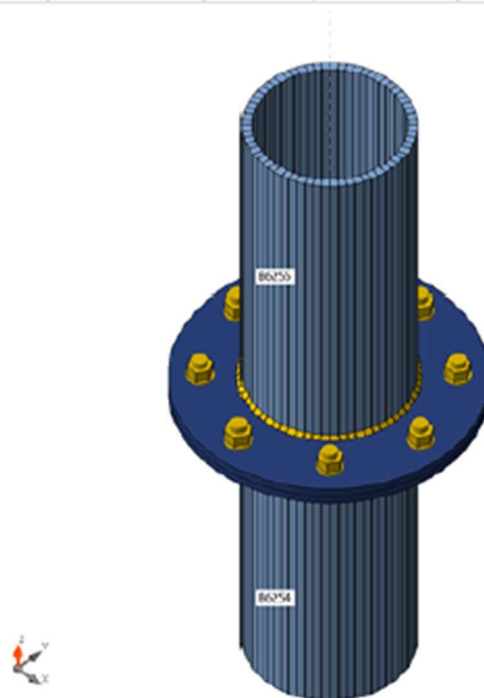

## Cross-sections

| Name                  | Material |
|-----------------------|----------|
| 1 - CHS(cf)219.1/12.5 | S 355    |

## Bolts

| Name    | Bolt assembly | Diameter [mm] | $f_u$ [MPa] | Gross area [mm <sup>2</sup> ] |
|---------|---------------|---------------|-------------|-------------------------------|
| M20 8.8 | M20 8.8       | 20            | 800.0       | 314                           |

## Load effects (forces in equilibrium)

| Name        | Member | N [kN] | Vy [kN] | Vz [kN] | Mx [kNm] | My [kNm] | Mz [kNm] |
|-------------|--------|--------|---------|---------|----------|----------|----------|
| ULS-Set(2)  | B6254  | 418.0  | -7.5    | -1.3    | -2.3     | -3.5     | 3.3      |
|             | B6255  | -418.0 | 7.5     | 1.3     | 2.3      | 3.5      | -3.3     |
| ULS-Set(18) | B6254  | 413.6  | -5.4    | -1.4    | -3.6     | -3.5     | 4.0      |
|             | B6255  | -413.6 | 5.4     | 1.4     | 3.6      | 3.5      | -4.0     |
| ULS-Set(21) | B6254  | 401.7  | -5.1    | -1.4    | -3.2     | -3.5     | 4.1      |
|             | B6255  | -401.7 | 5.1     | 1.4     | 3.2      | 3.5      | -4.1     |
| ULS-Set(24) | B6254  | 406.1  | -7.2    | -1.2    | -2.0     | -3.6     | 3.4      |
|             | B6255  | -406.1 | 7.2     | 1.2     | 2.0      | 3.6      | -3.4     |

## Check

## Summary

| Name     | Value          | Status |
|----------|----------------|--------|
| Analysis | 100.0%         | OK     |
| Plates   | 0.0 < 5.0%     | OK     |
| Bolts    | 3.9 < 100%     | OK     |
| Welds    | 64.6 < 100%    | OK     |
| Buckling | Not calculated |        |
| GMNA     | Calculated     |        |

## Plates


| Name  | Thickness [mm] | Loads       | $\sigma_{Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{cEd}$ [MPa] | Status |
|-------|----------------|-------------|---------------------|---------------------|----------------------|--------|
| B6254 | 12.5           | ULS-Set(2)  | 70.4                | 0.0                 | 0.0                  | OK     |
| B6255 | 12.5           | ULS-Set(2)  | 85.1                | 0.0                 | 0.0                  | OK     |
| PP1a  | 12.0           | ULS-Set(18) | 14.1                | 0.0                 | 10.7                 | OK     |
| PP1b  | 12.0           | ULS-Set(18) | 14.3                | 0.0                 | 10.7                 | OK     |

## Design data


| Material | $f_y$ [MPa] | $\epsilon_{lim}$ [%] |
|----------|-------------|----------------------|
| S 355    | 355.0       | 5.0                  |

## Symbol explanation

|                  |                         |
|------------------|-------------------------|
| $\epsilon_{pl}$  | Strain                  |
| $\sigma_{Ed}$    | Eq. stress              |
| $\sigma_{cEd}$   | Contact stress          |
| $f_y$            | Yield strength          |
| $\epsilon_{lim}$ | Limit of plastic strain |

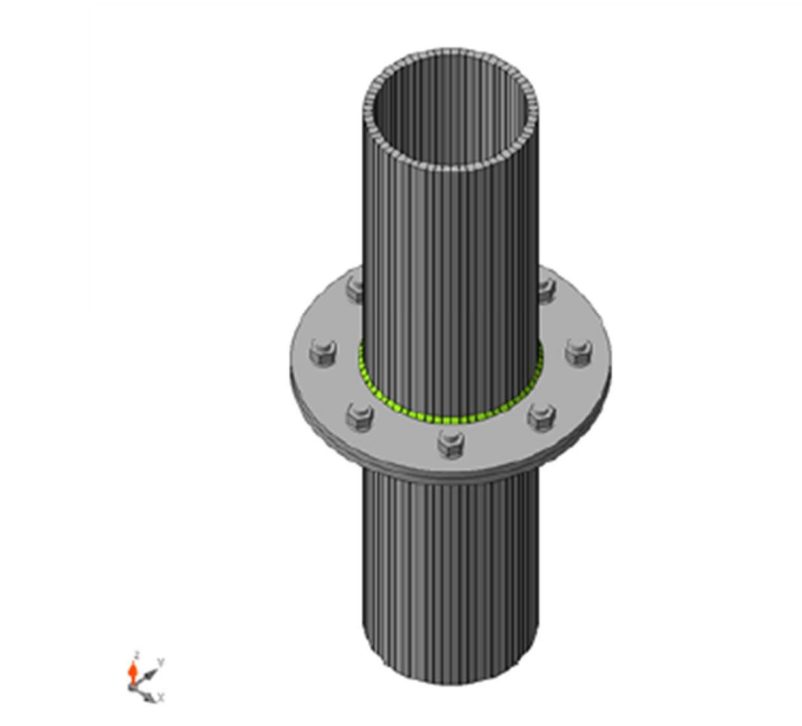


Overall check, ULS-Set(2)

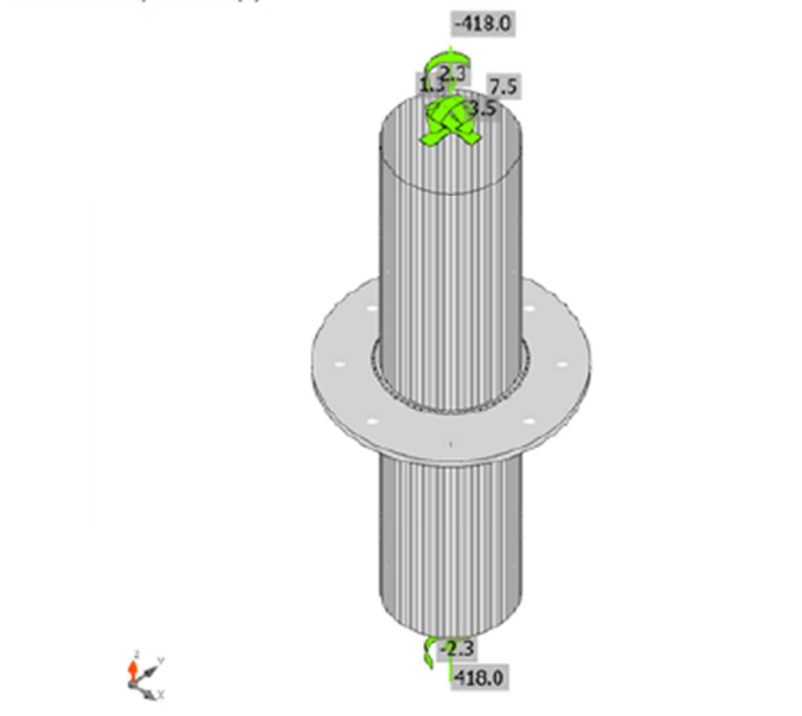

Strain check, ULS-Set(2)



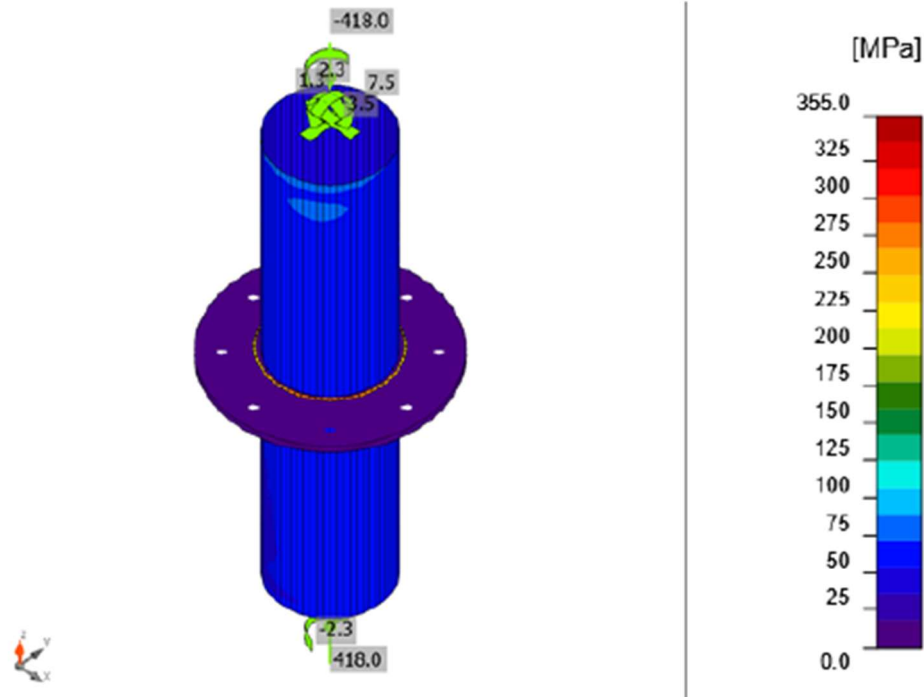

Equivalent stress, ULS-Set(2)

**Bolts**

|  | Name | Loads       | $F_{t,Ed}$ [kN] | V [kN] | $U_{t,t}$ [%] | $F_{D,Rd}$ [kN] | $U_{t,s}$ [%] | $U_{t,t,s}$ [%] | Status |
|--|------|-------------|-----------------|--------|---------------|-----------------|---------------|-----------------|--------|
|  | B1   | ULS-Set(18) | 0.2             | 3.0    | 0.2           | 189.9           | 3.2           | 3.3             | OK     |
|  | B2   | ULS-Set(18) | 0.2             | 2.5    | 0.1           | 187.4           | 2.6           | 2.7             | OK     |
|  | B3   | ULS-Set(18) | 0.3             | 2.1    | 0.2           | 211.9           | 2.2           | 2.4             | OK     |
|  | B4   | ULS-Set(18) | 0.3             | 2.2    | 0.2           | 198.6           | 2.3           | 2.5             | OK     |
|  | B5   | ULS-Set(18) | 0.4             | 2.7    | 0.3           | 185.9           | 2.8           | 3.0             | OK     |
|  | B6   | ULS-Set(18) | 0.3             | 3.2    | 0.2           | 194.4           | 3.4           | 3.6             | OK     |
|  | B7   | ULS-Set(18) | 0.3             | 3.5    | 0.2           | 218.6           | 3.7           | 3.9             | OK     |
|  | B8   | ULS-Set(18) | 0.3             | 3.4    | 0.2           | 208.5           | 3.6           | 3.8             | OK     |

**Design data**

| Name        | $F_{t,Rd}$ [kN] | $B_{p,Rd}$ [kN] | $F_{v,Rd}$ [kN] |
|-------------|-----------------|-----------------|-----------------|
| M20 8.8 - 1 | 141.1           | 279.3           | 94.1            |



**Symbol explanation**

|            |   |
|------------|---|
| $F_{t,Rd}$ | Bolt tension resistance EN 1993-1-8 tab. 3.4  |
| $F_{t,Ed}$ | Tension force                                 |
| $B_{p,Rd}$ | Punching shear resistance                     |
| $V$        | Resultant of shear forces $V_y, V_z$ in bolt  |
| $F_{v,Rd}$ | Bolt shear resistance EN_1993-1-8 table 3.4   |
| $F_{b,Rd}$ | Plate bearing resistance EN 1993-1-8 tab. 3.4 |
| $U_t$      | Utilization in tension                        |
| $U_s$      | Utilization in shear                          |

**Welds (Plastic redistribution)**

| Item | Edge  | Throat th. [mm] | Length [mm] | Loads       | $\sigma_{w,Ed}$ [MPa] | $\epsilon_{pl}$ [%] | $\sigma_{\perp}$ [MPa] | $\tau_{\parallel}$ [MPa] | $\tau_{\perp}$ [MPa] | $U_t$ [%] | $U_c$ [%] | Status |
|------|-------|-----------------|-------------|-------------|-----------------------|---------------------|------------------------|--------------------------|----------------------|-----------|-----------|--------|
| PP1a | B6254 | ▲4.0            | 649         | ULS-Set(18) | 280.0                 | 0.0                 | -147.9                 | 17.9                     | 136.1                | 64.3      | 51.0      | OK     |
| PP1b | B6255 | ▲4.0            | 649         | ULS-Set(18) | 281.4                 | 0.0                 | -149.1                 | 16.2                     | 136.8                | 64.6      | 51.0      | OK     |

**Design data**

|       | $\beta_w$ [-] | $\sigma_{w,Rd}$ [MPa] | $0.9 \sigma$ [MPa] |
|-------|---------------|-----------------------|--------------------|
| S 355 | 0.90          | 435.6                 | 352.8              |

**Symbol explanation**

|                    |   |
|--------------------|---|
| $\epsilon_{pl}$    | Strain  |
| $\sigma_{w,Ed}$    | Equivalent stress   |
| $\sigma_{w,Rd}$    | Equivalent stress resistance                                    |
| $\sigma_{\perp}$   | Perpendicular stress  |
| $\tau_{\parallel}$ | Shear stress parallel to weld axis                              |
| $\tau_{\perp}$     | Shear stress perpendicular to weld axis                         |
| $0.9 \sigma$       | Perpendicular stress resistance - $0.9 \cdot f_u / \gamma_{M2}$ |
| $\beta_w$          | Corelation factor EN 1993-1-8 tab. 4.1                          |
| $U_t$              | Utilization   |
| $U_c$              | Weld capacity utilization                                       |

**Buckling**

Buckling analysis was not calculated.

**Code settings**

| Item  | Value | Unit | Reference            |
|-------|-------|------|----------------------|
| YM0   | 1.00  | -    | EN 1993-1-1: 6.1     |
| YM1   | 1.00  | -    | EN 1993-1-1: 6.1     |
| YM2   | 1.25  | -    | EN 1993-1-1: 6.1     |
| YM3   | 1.25  | -    | EN 1993-1-8: 2.2     |
| YC    | 1.50  | -    | EN 1992-1-1: 2.4.2.4 |
| YInst | 1.20  | -    | EN 1992-4: Table 4.1 |


| Item                                    | Value                  | Unit | Reference  |
|---|------------------------|------|--|
| Joint coefficient $\beta_j$             | 0.87                   | -    | EN 1993-1-8: 6.2.5   |
| Effective area - influence of mesh size | 0.10                   | -    |  |
| Friction coefficient - concrete         | 0.25                   | -    | EN 1993-1-8  |
| Friction coefficient in slip-resistance | 0.30                   | -    | EN 1993-1-8 tab 3.7  |
| Limit plastic strain                    | 0.05                   | -    | EN 1993-1-5  |
| Weld stress evaluation                  | Plastic redistribution |      |  |
| Detailing                               | No                     |      |  |
| Distance between bolts [d]              | 2.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Distance between bolts and edge [d]     | 1.20                   | -    | EN 1993-1-8: tab 3.3                                       |
| Concrete breakout resistance check      | Both                   |      | EN 1992-4: 7.2.1.4 and 7.2.2.5                             |
| Use calculated $a_b$ in bearing check.  | Yes                    |      | EN 1993-1-8: tab 3.4                                       |
| Cracked concrete                        | Yes                    |      | EN 1992-4  |
| Local deformation check                 | No                     |      | CIDECT DG 1, 3 - 1.1                                       |
| Local deformation limit                 | 0.03                   | -    | CIDECT DG 1, 3 - 1.1                                       |
| Geometrical nonlinearity (GMNA)         | Yes                    |      | Analysis with large deformations for hollow section joints |
| Braced system                           | No                     |      | EN 1993-1-8: 5.2.2.5                                       |

## 6. AB MONOLITNI ELEMENTI KONSTRUKCIJE

### 6.1. AB temeljne stope

#### 6.1.1. Temeljna stopa „TS1“

##### 6.1.1.1. Reakcije na mjerodavnoj temeljnoj stopi

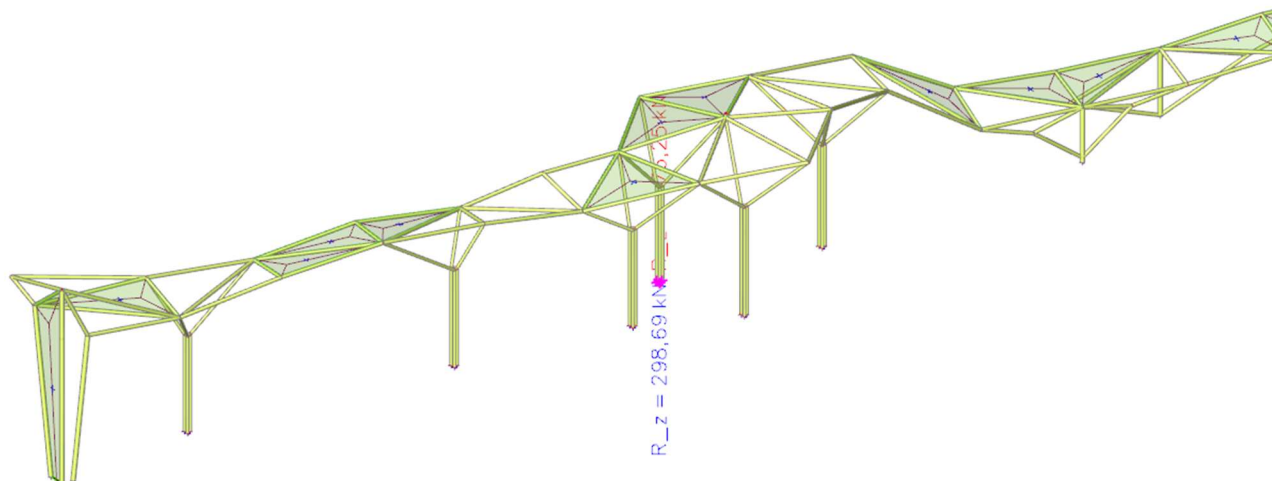

Slika 97: Mjerodavna reakcija za proračun temeljne stope „TS1“

## Resultant of reactions

Linear calculation

Combination: ULS-Set B (auto)

Extreme: Global

Selection: Sn594..Sn596, N5761, N5763, N5765

System: Global

| x<br>[m] | y<br>[m] | z<br>[m] | Case               | R <sub>x</sub><br>[kN] | R <sub>y</sub><br>[kN] | R <sub>z</sub><br>[kN] | M <sub>x</sub><br>[kNm] | M <sub>y</sub><br>[kNm] | M <sub>z</sub><br>[kNm] |
|----------|----------|----------|--------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/1 | <b>-9,25</b>           | 0,71                   | 66,92                  | -7,41                   | -50,16                  | -2,03                   |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/2 | 4,83                   | <b>-23,38</b>          | 173,86                 | <b>139,75</b>           | 33,01                   | -7,00                   |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/3 | 1,86                   | 1,49                   | <b>-76,25</b>          | -13,14                  | 15,40                   | 4,12                    |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/4 | -0,78                  | -10,15                 | <b>298,69</b>          | 65,77                   | -5,06                   | -12,89                  |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/5 | -4,21                  | <b>2,25</b>            | -59,61                 | <b>-17,94</b>           | -26,57                  | <b>4,22</b>             |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/6 | -8,70                  | -0,28                  | 78,10                  | -0,45                   | <b>-51,36</b>           | -2,20                   |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/7 | <b>6,76</b>            | -9,30                  | 220,27                 | 59,39                   | <b>47,54</b>            | -10,32                  |
| -14,494  | 1626,820 | 0,000    | ULS-Set B (auto)/8 | 5,29                   | -11,20                 | 277,49                 | 71,91                   | 37,34                   | <b>-12,99</b>           |

| Name               | Combination key   |
|--------------------|---|
| ULS-Set B (auto)/1 | G + dg + 1.50*w1(x) + 0.90*T-                           |
| ULS-Set B (auto)/2 | 1.35*G + 1.35*dg + 0.75*s + 1.50*w2(y) + 0.90*T+        |
| ULS-Set B (auto)/3 | G + dg + 0.90*T+ + 1.50*w3(odizanje)                    |
| ULS-Set B (auto)/4 | 1.35*G + 1.35*dg + 0.75*s + 0.90*T- + 1.50*w3(pritisak) |
| ULS-Set B (auto)/5 | G + dg + 0.90*T- + 1.50*w3(odizanje)                    |
| ULS-Set B (auto)/6 | G + dg + 0.90*w1(x) + 1.50*T-                           |
| ULS-Set B (auto)/7 | 1.35*G + 1.35*dg + 0.75*s + 1.50*T+ + 0.90*w3(pritisak) |
| ULS-Set B (auto)/8 | 1.35*G + 1.35*dg + 1.50*s + 0.90*T+ + 0.90*w3(pritisak) |

Tablica 9: Tablični prikaz reakcija na mjerodavnoj temeljnoj stopi „TS1“

## 6.1.1.2. Dimenzioniranje temelja pozicije „TS1“ – 220 x 220 x 100 cm

## PRORAČUN TEMELJA SAMCA POZICIJE "TS1"

## MATERIJALI

## Beton:

Klasa betona **C 25/30**

$$f_{ck} = 25,00 \text{ MPa}$$

$$f_{cd} = 16,67 \text{ MPa}$$

## Armatura:

Tip armature: **B 500B**

$$f_{yk} = 500,00 \text{ MPa}$$

$$f_{yd} = 434,78 \text{ MPa}$$


## Koeficijenti sigurnosti materijala:

$$\gamma_c = 1,5$$

$$\gamma_s = 1,15$$

$$f_{cd} = \frac{f_{ck}}{\gamma_c} \quad f_{yd} = \frac{f_{yk}}{\gamma_s}$$

## GEOMETRIJSKE KARAKTERISTIKE TEMELJA

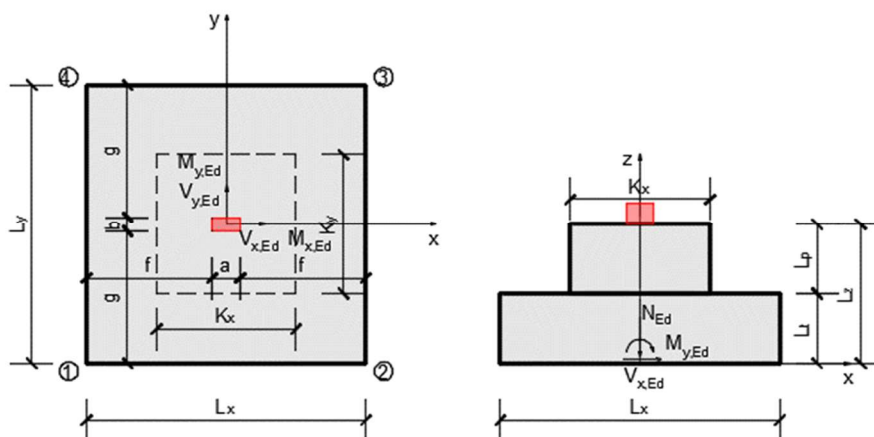

$$L_x = 220 \text{ cm}$$

$$L_y = 220 \text{ cm}$$

$$L_t = 100 \text{ cm}$$

$$L_p = 0 \text{ cm}$$

$$L_z = 100 \text{ cm}$$

$$a = 20 \text{ cm}$$

$$b = 20 \text{ cm}$$

$$f = 100 \text{ cm}$$

$$g = 100 \text{ cm}$$

$$K_x = 150 \text{ cm}$$

$$K_y = 60 \text{ cm}$$

$$d = 95,0 \text{ cm}$$

$$d_1 = 5,0 \text{ cm}$$

$$A_t = 4,84 \text{ m}^2$$

$$W_x = 1,7747 \text{ m}^3$$

$$W_y = 1,7747 \text{ m}^3$$

$$I_x = 1,9521 \text{ m}^4$$

$$I_y = 1,9521 \text{ m}^4$$

$$A_t = L_x \cdot L_y$$

$$W_x = \frac{L_x \cdot L_y^2}{6} \quad W_y = \frac{L_y \cdot L_x^2}{6}$$

$$W_y = \frac{L_y \cdot L_x^2}{6} \quad I_y = \frac{L_y \cdot L_x^3}{12}$$

d - statička visina

d1- udaljenost dna temelja od težišta armature

$$d = L_t - d_1$$

**REZNE SILE ZA DIMENZIONIRANJE TEMELJA**

Tablica reznih sila od stupova koje se prenose na temelje

| Kombinacije opterećenja | $M_{x,Eds}$<br>(kNm) | $M_{y,Eds}$<br>(kNm) | $V_{x,Eds}$<br>(kN) | $V_{y,Eds}$<br>(kN) | $N_{Eds}$<br>(kN) |
|-------------------------|----------------------|----------------------|---------------------|---------------------|-------------------|
| (Mmax, Nprip)           | 6,83                 | 122,35               | 0                   | 0                   | 190,25            |
| (Nmax, Mprip)           |                      |                      |                     |                     |                   |
| .                       |                      |                      |                     |                     |                   |
| .                       |                      |                      |                     |                     |                   |

Visina zemlje (od vrha do vrha temeljne stope)

z=  cm

|              |                                    |                   |
|--------------|------------------------------------|-------------------|
| $\gamma_z =$ | <input type="text" value="20"/>    | kN/m <sup>3</sup> |
| $\gamma_b =$ | <input type="text" value="25"/>    | kN/m <sup>3</sup> |
| $N_z =$      | <input type="text" value="15,76"/> | kN                |
| $N_t =$      | <input type="text" value="121"/>   | kN                |

$N_z$  - sila od težine zemlje  
 $N_t$  - sila od težine temelja

$$N_{Ed} = N_{Eds} + N_z + N_t$$


$$M_{x,Ed} = M_{x,Eds} + V_{y,Eds} \cdot L_z$$

$$M_{y,Ed} = M_{y,Eds} + V_{x,Eds} \cdot L_z$$

Tablica reznih za dimenzioniranje temelja

| Kombinacije opterećenja | $M_{x,Ed}$<br>(kNm) | $M_{y,Ed}$<br>(kNm) | $N_{Ed}$<br>(kN) |
|-------------------------|---------------------|---------------------|------------------|
| (Mmax, Nprip)           | 6,83                | 122,35              | 374,88           |
| (Nmax, Mprip)           |                     |                     |                  |
| .                       |                     |                     |                  |
| .                       |                     |                     |                  |

## PRORAČUN NAPREZANJA ISPOD TEMELJNE STOPE

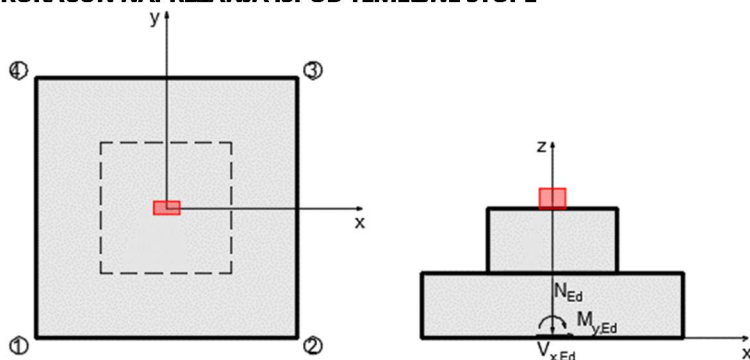

$$\sigma_1 = \frac{N_{Ed}}{A_t} + \frac{M_{y,Ed}}{W_y} - \frac{M_{x,Ed}}{W_x} \quad \sigma_2 = \frac{N_{Ed}}{A_t} + \frac{M_{y,Ed}}{W_y} + \frac{M_{x,Ed}}{W_x} \quad e_x = \frac{M_{x,Ed}}{N_{Ed}}$$


$$\sigma_3 = \frac{N_{Ed}}{A_t} - \frac{M_{y,Ed}}{W_y} + \frac{M_{x,Ed}}{W_x} \quad \sigma_4 = \frac{N_{Ed}}{A_t} - \frac{M_{y,Ed}}{W_y} - \frac{M_{x,Ed}}{W_x} \quad e_y = \frac{M_{y,Ed}}{N_{Ed}}$$

U slučaju da je  $e > L/6$  potrebna je redukcija temeljne stope!

| Kombinacije opterećenja | $e_x$<br>(cm) | $L_x/6$<br>(cm) | $e_y$<br>(cm) | $L_y/6$<br>(cm) |
|-------------------------|---------------|-----------------|---------------|-----------------|
| (Mmax, Nprp)            | 1,82          | 36,67           | 32,64         | 36,67           |
| (Nmax, Mprp)            |               |                 |               |                 |
| .                       |               |                 |               |                 |
| .                       |               |                 |               |                 |

| Kombinacije opterećenja | $\sigma_1$<br>(kPa) | $\sigma_2$<br>(kPa) | $\sigma_3$<br>(kPa) | $\sigma_4$<br>(kPa) |
|-------------------------|---------------------|---------------------|---------------------|---------------------|
| (Mmax, Nprp)            | 12,36               | 150,24              | 142,55              | 4,66                |
| (Nmax, Mprp)            |                     |                     |                     |                     |
| .                       |                     |                     |                     |                     |
| .                       |                     |                     |                     |                     |

## Shematski prikaz reducirane površine temelja

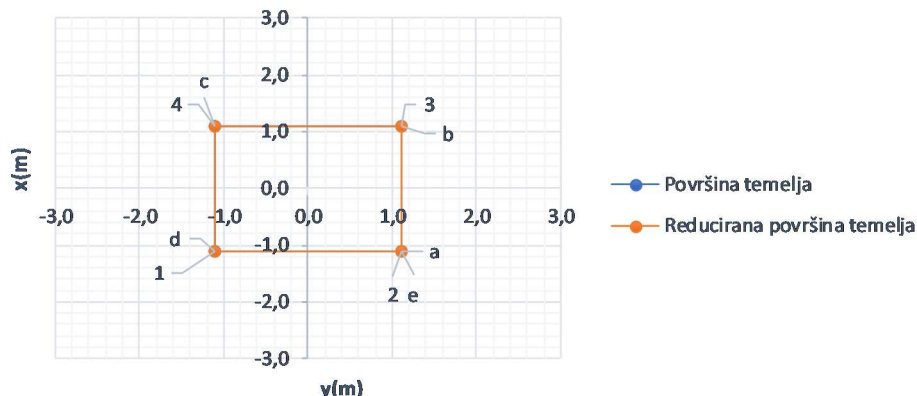 $\sigma_{\max}$ 

150,24 kPa

&lt;

 $\sigma_{\text{dop}}$ 

325 kPa

Zadovoljava!

## PRORAČUN POTREBNE ARMATURE U TEMELJU

| Kombinacije opterećenja | x-smjer |         |                           | y-smjer |         |                           |
|-------------------------|---------|---------|---------------------------|---------|---------|---------------------------|
|                         | $\mu A$ | $\zeta$ | As1<br>(cm <sup>2</sup> ) | $\mu B$ | $\zeta$ | As1<br>(cm <sup>2</sup> ) |
| Kritična kombinacija    | 0,004   | 0,987   | 3,39                      | 0,003   | 0,990   | 2,41                      |

Napomena: As1 je ukupna armatura potrebna u temeljnoj stopi u jednom smjeru!


| Potrebna armatura | x-smjer            |                       | y-smjer            |                       |
|-------------------|--------------------|-----------------------|--------------------|-----------------------|
|                   | (cm <sup>2</sup> ) | (cm <sup>2</sup> /m') | (cm <sup>2</sup> ) | (cm <sup>2</sup> /m') |
|                   | 3,39               | 1,54                  | 2,41               | 1,10                  |

Minimalna armatura u temelju  $A_{smin} = 6,50$  (cm<sup>2</sup>/m')  $A_{smin} = 0.0013 \cdot b \cdot d$

|                 | x-smjer                  | y-smjer                  |
|-----------------|--------------------------|--------------------------|
| Odabrana mreža  |                          |                          |
| Odabrane šipke  | Ø12 / 15                 | Ø12 / 15                 |
| Ukupna armatura | 7,54 cm <sup>2</sup> /m' | 7,54 cm <sup>2</sup> /m' |

## 6.1.1.3. Odabrana armatura za temelj pozicije „TS1“

U donju i gornju zonu postaviti šipkastu armaturu Ø 12/15 ( $A_s = 6.79$  cm<sup>2</sup>/m') obostrano. Po rubu temelja postaviti konstruktivnu armaturu 2Ø10.

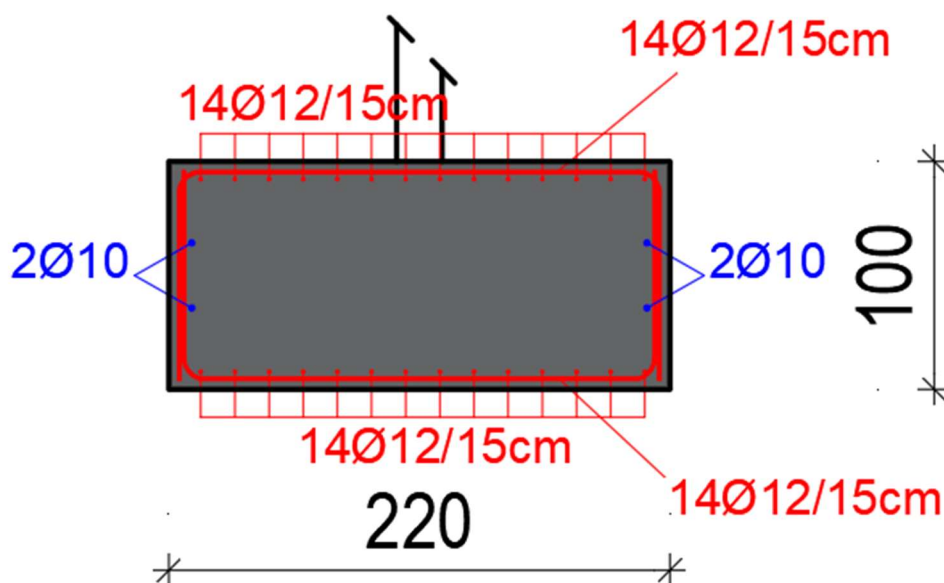


Slika 98: Shematski prikaz armature temelja pozicije TS1



## 6.1.2. Temeljna stopa „TS2“

### 6.1.2.1. Reakcije na mjerodavnoj temeljnoj stopi

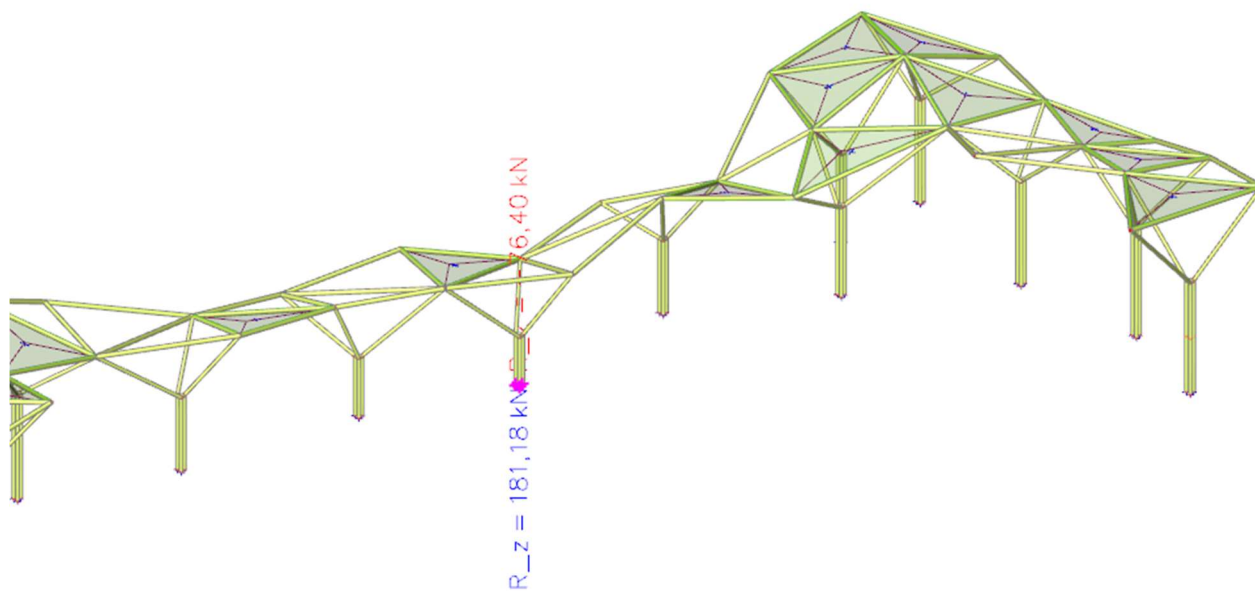

Slika 99: Mjerodavna reakcija za proračun temeljne stope „TS2“

## Resultant of reactions

Linear calculation

Combination: ULS-Set B (auto)

Extreme: Global

Selection: Sn627..Sn629, N5827, N5829, N5831

System: Global

| x<br>[m] | y<br>[m] | z<br>[m] | Case                | R <sub>x</sub><br>[kN] | R <sub>y</sub><br>[kN] | R <sub>z</sub><br>[kN] | M <sub>x</sub><br>[kNm] | M <sub>y</sub><br>[kNm] | M <sub>z</sub><br>[kNm] |
|----------|----------|----------|---------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/1  | 61,02                  | <b>-12,25</b>          | -50,66                 | 19,12                   | 199,28                  | 4,30                    |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/2  | -50,37                 | <b>29,24</b>           | 155,45                 | 5,67                    | -193,90                 | -1,83                   |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/3  | 92,55                  | -7,69                  | <b>-76,40</b>          | 19,32                   | 298,31                  | 8,47                    |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/4  | -81,90                 | 24,68                  | <b>181,18</b>          | 5,47                    | -292,93                 | -6,00                   |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/5  | -68,91                 | 6,98                   | 99,47                  | <b>-6,64</b>            | -224,01                 | -2,59                   |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/6  | 61,37                  | -2,82                  | -8,84                  | <b>79,03</b>            | 175,09                  | 9,42                    |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/7  | <b>-93,66</b>          | 14,01                  | 151,32                 | -2,75                   | <b>-315,29</b>          | -6,03                   |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/8  | <b>94,14</b>           | -5,99                  | -63,04                 | 22,86                   | <b>300,01</b>           | 8,71                    |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/9  | -76,57                 | -0,58                  | 115,05                 | 7,46                    | -254,18                 | <b>-9,09</b>            |
| 157,706  | 1622,029 | 0,000    | ULS-Set B (auto)/10 | 93,39                  | 0,89                   | -39,92                 | 57,07                   | 282,06                  | <b>11,99</b>            |

| Name                | Combination key   |
|---------------------|---|
| ULS-Set B (auto)/1  | G + dg + 0.90*T- + 1.50*w3(odizanje)                    |
| ULS-Set B (auto)/2  | 1.35*G + 1.35*dg + 0.75*s + 0.90*T+ + 1.50*w3(pritisak) |
| ULS-Set B (auto)/3  | G + dg + 1.50*T- + 0.90*w3(odizanje)                    |
| ULS-Set B (auto)/4  | 1.35*G + 1.35*dg + 0.75*s + 1.50*T+ + 0.90*w3(pritisak) |
| ULS-Set B (auto)/5  | G + dg + 1.50*w1(x) + 0.90*T+                           |
| ULS-Set B (auto)/6  | 1.35*G + 1.35*dg + 0.75*s + 1.50*w2(y) + 0.90*T-        |
| ULS-Set B (auto)/7  | G + dg + 0.75*s + 0.90*w1(x) + 1.50*T+                  |
| ULS-Set B (auto)/8  | 1.35*G + 1.35*dg + 1.50*T- + 0.90*w3(odizanje)          |
| ULS-Set B (auto)/9  | G + dg + 1.50*T+ + 0.90*w3(odizanje)                    |
| ULS-Set B (auto)/10 | 1.35*G + 1.35*dg + 0.75*s + 0.90*w2(y) + 1.50*T-        |

Tablica 10: Tablični prikaz reakcija na mjerodavnoj temeljnoj stopi „TS2“

## 6.1.2.2. Dimenzioniranje temelja pozicije „TS2“ – 300 x 300 x 100 cm

## PRORAČUN TEMELJA SAMCA POZICIJE "TS2"

## MATERIJALI

Beton:

Klasa betona **C 25/30**

$$f_{ck} = 25,00 \text{ MPa}$$

$$f_{cd} = 16,67 \text{ MPa}$$

Armatura:

Tip armature: **B 500B**

$$f_{yk} = 500,00 \text{ MPa}$$

$$f_{yd} = 434,78 \text{ MPa}$$


Koeficijenti sigurnosti materijala:

$$\gamma_c = 1,5$$

$$\gamma_s = 1,15$$

$$f_{cd} = \frac{f_{ck}}{\gamma_c} \quad f_{yd} = \frac{f_{yk}}{\gamma_s}$$

## GEOMETRIJSKE KARAKTERISTIKE TEMELJA

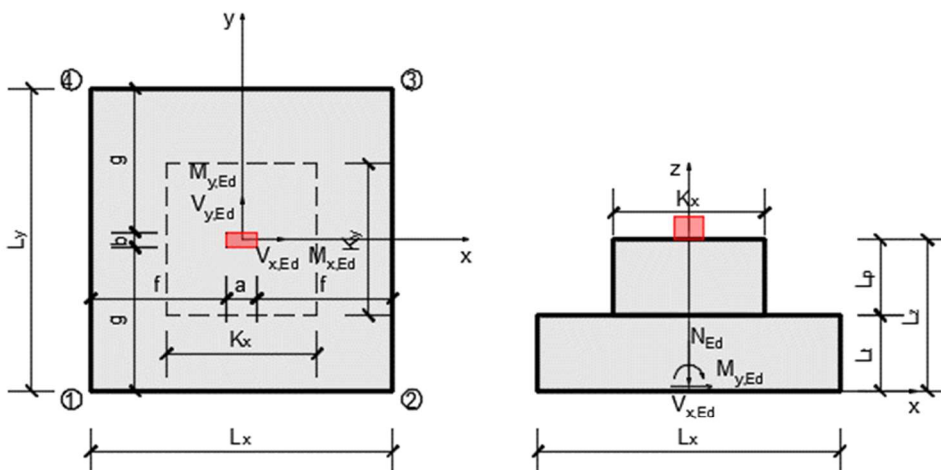

|         |     |    |
|---------|-----|----|
| $L_x =$ | 220 | cm |
| $L_y =$ | 220 | cm |
| $L_t =$ | 100 | cm |
| $L_p =$ | 0   | cm |
| $L_z =$ | 100 | cm |
| $a =$   | 20  | cm |
| $b =$   | 20  | cm |

|         |     |    |
|---------|-----|----|
| $f =$   | 100 | cm |
| $g =$   | 100 | cm |
| $K_x =$ | 150 | cm |
| $K_y =$ | 60  | cm |

|         |      |    |
|---------|------|----|
| $d =$   | 95,0 | cm |
| $d_1 =$ | 5,0  | cm |

|         |        |                |
|---------|--------|----------------|
| $A_t =$ | 4,84   | m <sup>2</sup> |
| $W_x =$ | 1,7747 | m <sup>3</sup> |
| $W_y =$ | 1,7747 | m <sup>3</sup> |
| $I_x =$ | 1,9521 | m <sup>4</sup> |
| $I_y =$ | 1,9521 | m <sup>4</sup> |

$$A_t = L_x \cdot L_y$$

$$W_x = \frac{L_x \cdot L_y^2}{6} \quad W_y = \frac{L_y \cdot L_x^2}{6}$$

$$W_y = \frac{L_y \cdot L_x^2}{6} \quad I_y = \frac{L_y \cdot L_x^3}{12}$$

d - statička visina

d1 - udaljenost dna temelja od težišta armature

$$d = L_t - d_1$$

**REZNE SILE ZA DIMENZIONIRANJE TEMELJA**

Tablica reznih sila od stupova koje se prenose na temelje

| Kombinacije opterećenja | $M_{x,Eds}$<br>(kNm) | $M_{y,Eds}$<br>(kNm) | $V_{x,Eds}$<br>(kN) | $V_{y,Eds}$<br>(kN) | $N_{Eds}$<br>(kN) |
|-------------------------|----------------------|----------------------|---------------------|---------------------|-------------------|
| (Mmax, Nprip)           | 132,49               | 99,51                | 0                   | 0                   | 38,82             |
| (Nmax, Mprip)           |                      |                      |                     |                     |                   |
| .                       |                      |                      |                     |                     |                   |
| .                       |                      |                      |                     |                     |                   |

Visina zemlje (od vrha do vrha temeljne stope)

z=  cm

$$\gamma_z = \begin{array}{|c|} \hline 20 \\ \hline \end{array} \text{ kN/m}^3$$

$$\gamma_b = \begin{array}{|c|} \hline 25 \\ \hline \end{array} \text{ kN/m}^3$$

$$N_z = \begin{array}{|c|} \hline 15,76 \\ \hline \end{array} \text{ kN}$$

$$N_t = \begin{array}{|c|} \hline 121 \\ \hline \end{array} \text{ kN}$$

Nz - sila od težine zemlje

Nt- sila od težine temelja

$$N_{Ed} = N_{Eds} + N_z + N_t$$


$$M_{x,Ed} = M_{x,Eds} + V_{y,Eds} \cdot L_z$$

$$M_{y,Ed} = M_{y,Eds} + V_{x,Eds} \cdot L_z$$

Tablica reznih za dimenzioniranje temelja

| Kombinacije opterećenja | $M_{x,Ed}$<br>(kNm) | $M_{y,Ed}$<br>(kNm) | $N_{Ed}$<br>(kN) |
|-------------------------|---------------------|---------------------|------------------|
| (Mmax, Nprip)           | 132,49              | 99,51               | 223,45           |
| (Nmax, Mprip)           |                     |                     |                  |
| .                       |                     |                     |                  |
| .                       |                     |                     |                  |

## PRORAČUN NAPREZANJA ISPOD TEMELJNE STOPE

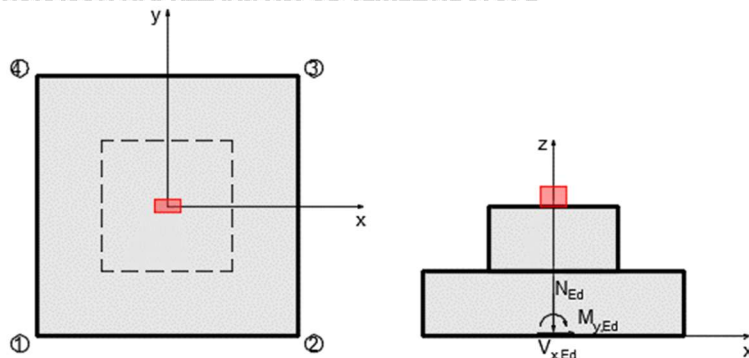


$$\sigma_1 = \frac{N_{Ed}}{A_t} + \frac{M_{y,Ed}}{W_y} - \frac{M_{x,Ed}}{W_x} \quad \sigma_2 = \frac{N_{Ed}}{A_t} + \frac{M_{y,Ed}}{W_y} + \frac{M_{x,Ed}}{W_x} \quad e_x = \frac{M_{x,Ed}}{N_{Ed}}$$

$$\sigma_3 = \frac{N_{Ed}}{A_t} - \frac{M_{y,Ed}}{W_y} + \frac{M_{x,Ed}}{W_x} \quad \sigma_4 = \frac{N_{Ed}}{A_t} - \frac{M_{y,Ed}}{W_y} - \frac{M_{x,Ed}}{W_x} \quad e_y = \frac{M_{y,Ed}}{N_{Ed}}$$

U slučaju da je  $e > L/6$  potrebna je redukcija temeljne stope!

| Kombinacije opterećenja | $e_x$<br>(cm) | $L_x/6$<br>(cm) | $e_y$<br>(cm) | $L_y/6$<br>(cm) |
|-------------------------|---------------|-----------------|---------------|-----------------|
| (Mmax, Nprip)           | 59,29         | 36,67           | 44,53         | 36,67           |
| (Nmax, Mprip)           |               |                 |               |                 |
| .                       |               |                 |               |                 |
| .                       |               |                 |               |                 |

| Kombinacije opterećenja | $\sigma_1$<br>(kPa) | $\sigma_2$<br>(kPa) | $\sigma_3$<br>(kPa) | $\sigma_4$<br>(kPa) |
|-------------------------|---------------------|---------------------|---------------------|---------------------|
| (Mmax, Nprip)           | 42,83               | 251,55              | 0,00                | 0,00                |
| (Nmax, Mprip)           |                     |                     |                     |                     |
| .                       |                     |                     |                     |                     |
| .                       |                     |                     |                     |                     |

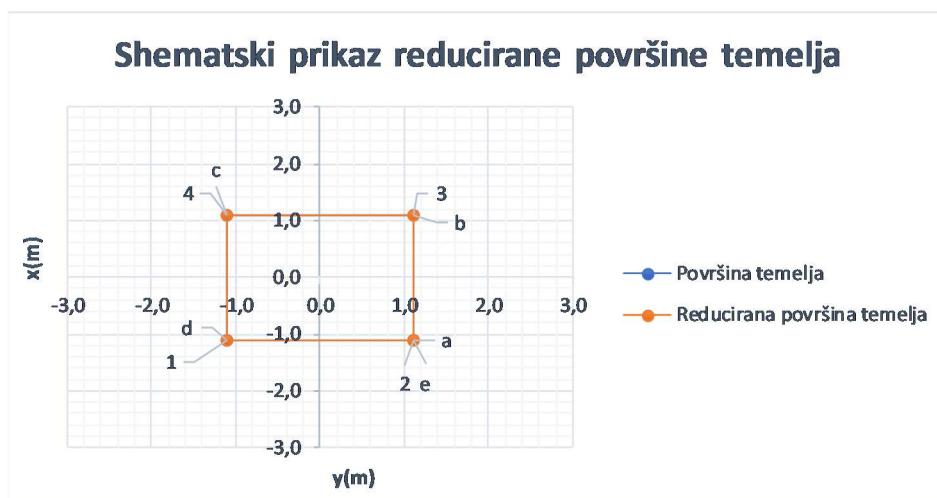 $\sigma_{max}$ 

251,55 kPa

&lt;

 $\sigma_{dop}$ 

325 kPa

Zadovoljava!

## PRORAČUN POTREBNE ARMATURE U TEMELJU

| Kombinacije opterećenja | x-smjer |         |                        | y-smjer |         |                        |
|-------------------------|---------|---------|------------------------|---------|---------|------------------------|
|                         | $\mu A$ | $\zeta$ | $A_{s1}$<br>( $cm^2$ ) | $\mu B$ | $\zeta$ | $A_{s1}$<br>( $cm^2$ ) |
| Kritična kombinacija    | 0,003   | 0,990   | 2,31                   | 0,003   | 0,987   | 2,81                   |

Napomena:  $A_{s1}$  je ukupna armatura potrebna u temeljnoj stopi u jednom smjeru!


|                   | x-smjer    |               | y-smjer    |               |
|-------------------|------------|---------------|------------|---------------|
|                   | ( $cm^2$ ) | ( $cm^2/m'$ ) | ( $cm^2$ ) | ( $cm^2/m'$ ) |
| Potrebna armatura | 2,31       | 1,05          | 2,81       | 1,28          |

Minimalna armatura u temelju  $A_{smin} = 6,50$  ( $cm^2/m'$ )  $A_{smin} = 0.0013 \cdot b \cdot d$

|                 | x-smjer             | y-smjer             |
|-----------------|---------------------|---------------------|
| Odabrana mreža  |                     |                     |
| Odabrane šipke  | $\emptyset 12 / 15$ | $\emptyset 12 / 15$ |
| Ukupna armatura | $7,54$ $cm^2/m'$    | $7,54$ $cm^2/m'$    |


## 6.1.2.3. Odabrana armatura za temelj pozicije „TS2“

U donju i gornju zonu postaviti šipkastu armaturu  $\emptyset 12/15$  ( $A_s = 6.79$   $cm^2/m'$ ) obostrano. Po rubu temelja postaviti konstruktivnu armaturu  $2\emptyset 10$ .

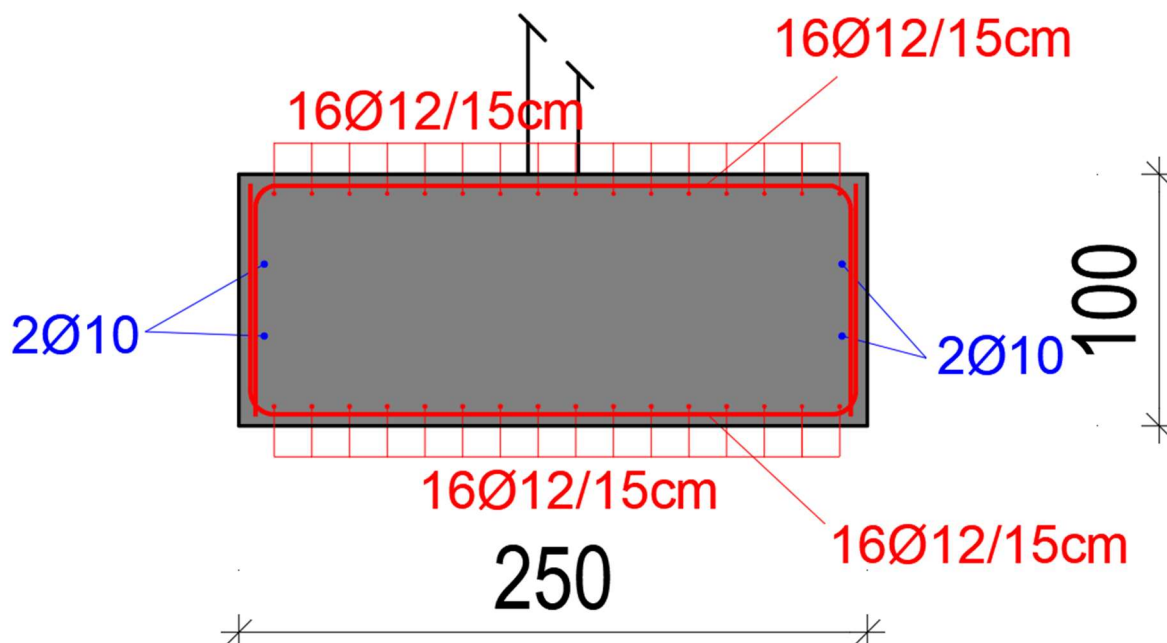

### 6.1.1. Temeljna stopa „TS3“

#### 6.1.1.1. Reakcije na mjerodavnoj temeljnoj stopi

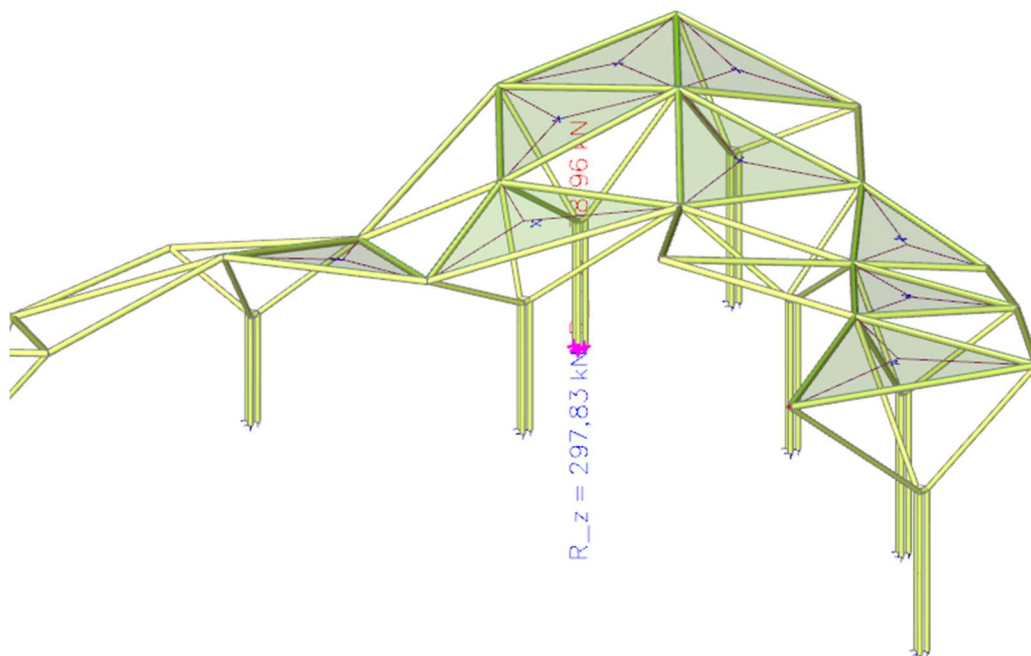

Slika 100: Mjerodavna reakcija za proračun temeljne stope „TS3“

## Resultant of reactions

Linear calculation

Combination: ULS-Set B (auto)

Extreme: Global

Selection: Sn636..Sn638, N5845, N5847, N5849

System: Global

| x<br>[m] | y<br>[m] | z<br>[m] | Case                | R <sub>x</sub><br>[kN] | R <sub>y</sub><br>[kN] | R <sub>z</sub><br>[kN] | M <sub>x</sub><br>[kNm] | M <sub>y</sub><br>[kNm] | M <sub>z</sub><br>[kNm] |
|----------|----------|----------|---------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/1  | <b>-29,41</b>          | -3,66                  | 83,61                  | 21,91                   | -139,83                 | -0,35                   |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/2  | <b>24,96</b>           | -0,36                  | 221,07                 | 6,01                    | 107,92                  | -1,45                   |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/3  | -13,54                 | <b>-22,55</b>          | 180,42                 | <b>111,46</b>           | -70,39                  | -0,96                   |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/4  | 23,44                  | <b>3,91</b>            | -3,93                  | -20,94                  | 115,10                  | 0,96                    |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/5  | -15,83                 | 0,15                   | <b>-78,96</b>          | -1,05                   | -67,56                  | 2,13                    |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/6  | 15,60                  | -2,90                  | <b>297,83</b>          | 21,46                   | 59,24                   | -1,85                   |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/7  | 13,30                  | 3,78                   | -65,31                 | <b>-21,03</b>           | 70,69                   | 1,74                    |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/8  | -29,18                 | -4,70                  | 138,13                 | 28,61                   | <b>-141,97</b>          | -0,82                   |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/9  | 24,72                  | -8,93                  | 104,29                 | 41,32                   | <b>115,23</b>           | -0,68                   |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/10 | 6,49                   | 0,64                   | 132,24                 | -1,81                   | 29,24                   | <b>-2,19</b>            |
| 185,571  | 1628,590 | 0,000    | ULS-Set B (auto)/11 | -15,90                 | -0,11                  | -54,48                 | 0,99                    | -68,48                  | <b>2,24</b>             |

| Name                | Combination key   |
|---------------------|---|
| ULS-Set B (auto)/1  | 1.35*G + 1.35*dg + 0.90*w1(x) + 1.50*T+                 |
| ULS-Set B (auto)/2  | G + dg + 0.75*s + 1.50*T- + 0.90*w3(pritisak)           |
| ULS-Set B (auto)/3  | 1.35*G + 1.35*dg + 0.75*s + 1.50*w2(y) + 0.90*T+        |
| ULS-Set B (auto)/4  | G + dg + 1.50*T- + 0.90*w3(odizanje)                    |
| ULS-Set B (auto)/5  | G + dg + 0.90*T+ + 1.50*w3(odizanje)                    |
| ULS-Set B (auto)/6  | 1.35*G + 1.35*dg + 0.75*s + 0.90*T- + 1.50*w3(pritisak) |
| ULS-Set B (auto)/7  | G + dg + 0.90*T- + 1.50*w3(odizanje)                    |
| ULS-Set B (auto)/8  | 1.35*G + 1.35*dg + 0.75*s + 0.90*w1(x) + 1.50*T+        |
| ULS-Set B (auto)/9  | G + dg + 0.90*w2(y) + 1.50*T-                           |
| ULS-Set B (auto)/10 | G + dg + 0.75*s + 1.50*w1(x) + 0.90*T-                  |
| ULS-Set B (auto)/11 | 1.35*G + 1.35*dg + 0.90*T+ + 1.50*w3(odizanje)          |

Tablica 11: Tablični prikaz reakcija na mjerodavnoj temeljnoj stopi „TS3“



## 6.1.1.2. Dimenzioniranje temelja pozicije „TS3“ 250 x 250 x 100 cm

## PRORAČUN TEMELJA SAMCA POZICIJE "TS3"

## MATERIJALI

## Beton:

Klasa betona **C 25/30** $f_{ck} = 25,00$  MPa $f_{cd} = 16,67$  MPa

## Armatura:


Tip armature: **B 500B** $f_{yk} = 500,00$  MPa $f_{yd} = 434,78$  MPa

## Koeficijenti sigurnosti materijala:

 $\gamma_c = 1,5$  $\gamma_s = 1,15$ 

$$f_{cd} = \frac{f_{ck}}{\gamma_c} \quad f_{yd} = \frac{f_{yk}}{\gamma_s}$$

## GEOMETRIJSKE KARAKTERISTIKE TEMELJA

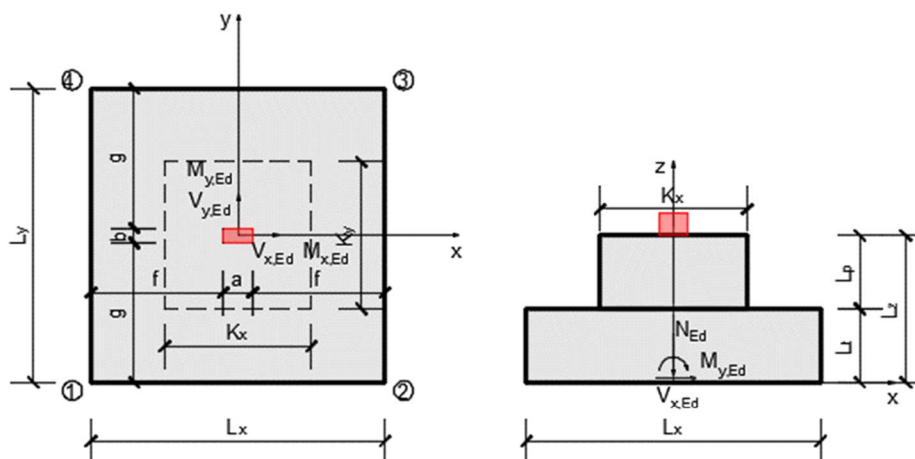

|         |     |    |
|---------|-----|----|
| $L_x =$ | 300 | cm |
| $L_y =$ | 300 | cm |
| $L_t =$ | 100 | cm |
| $L_p =$ | 0   | cm |
| $L_z =$ | 100 | cm |
| $a =$   | 20  | cm |
| $b =$   | 20  | cm |

|         |     |    |
|---------|-----|----|
| $f =$   | 140 | cm |
| $g =$   | 140 | cm |
| $K_x =$ | 150 | cm |
| $K_y =$ | 60  | cm |

|         |      |    |
|---------|------|----|
| $d =$   | 95,0 | cm |
| $d_1 =$ | 5,0  | cm |

|         |        |                |
|---------|--------|----------------|
| $A_t =$ | 9,00   | m <sup>2</sup> |
| $W_x =$ | 4,5000 | m <sup>3</sup> |
| $W_y =$ | 4,5000 | m <sup>3</sup> |
| $I_x =$ | 6,7500 | m <sup>4</sup> |
| $I_y =$ | 6,7500 | m <sup>4</sup> |

$$A_t = L_x \cdot L_y$$

$$W_x = \frac{L_x \cdot L_y^2}{6} \quad W_y = \frac{L_y \cdot L_x^2}{6}$$

$$W_y = \frac{L_y \cdot L_x^2}{6} \quad I_y = \frac{L_y \cdot L_x^3}{12}$$

d - statička visina

d1- udaljenost dna temelja od težišta armature

$$d = L_t - d_1$$

**REZNE SILE ZA DIMENZIONIRANJE TEMELJA**

Tablica reznih sila od stupova koje se prenose na temelje

| Kombinacije opterećenja | $M_{x,Eds}$<br>(kNm) | $M_{y,Eds}$<br>(kNm) | $V_{x,Eds}$<br>(kN) | $V_{y,Eds}$<br>(kN) | $N_{Eds}$<br>(kN) |
|-------------------------|----------------------|----------------------|---------------------|---------------------|-------------------|
| (Mmax, Nprip)           | 132,49               | 99,51                | 0                   | 0                   | 38,82             |
| (Nmax, Mprip)           |                      |                      |                     |                     |                   |
| .                       |                      |                      |                     |                     |                   |
| .                       |                      |                      |                     |                     |                   |

Visina zemlje (od vrha do vrha temeljne stope)

z=  cm

|              |                                   |                   |
|--------------|-----------------------------------|-------------------|
| $\gamma_z =$ | <input type="text" value="20"/>   | kN/m <sup>3</sup> |
| $\gamma_b =$ | <input type="text" value="25"/>   | kN/m <sup>3</sup> |
| $N_z =$      | <input type="text" value="32,4"/> | kN                |
| $N_t =$      | <input type="text" value="225"/>  | kN                |

$N_z$  - sila od težine zemlje

$N_t$  - sila od težine temelja

$$N_{Ed} = N_{Eds} + N_z + N_t$$


$$M_{x,Ed} = M_{x,Eds} + V_{y,Eds} \cdot L_z$$

$$M_{y,Ed} = M_{y,Eds} + V_{x,Eds} \cdot L_z$$

Tablica reznih za dimenzioniranje temelja

| Kombinacije opterećenja | $M_{x,Ed}$<br>(kNm) | $M_{y,Ed}$<br>(kNm) | $N_{Ed}$<br>(kN) |
|-------------------------|---------------------|---------------------|------------------|
| (Mmax, Nprip)           | 132,49              | 99,51               | 386,31           |
| (Nmax, Mprip)           |                     |                     |                  |
| .                       |                     |                     |                  |
| .                       |                     |                     |                  |

## PRORAČUN NAPREZANJA ISPOD TEMELJNE STOPE

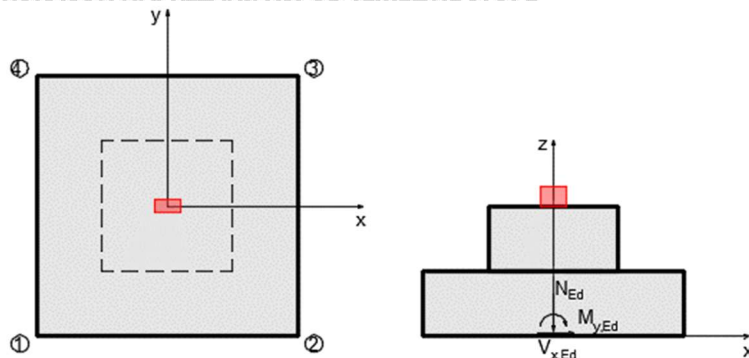


$$\sigma_1 = \frac{N_{Ed}}{A_t} + \frac{M_{y,Ed}}{W_y} - \frac{M_{x,Ed}}{W_x} \quad \sigma_2 = \frac{N_{Ed}}{A_t} + \frac{M_{y,Ed}}{W_y} + \frac{M_{x,Ed}}{W_x} \quad e_x = \frac{M_{x,Ed}}{N_{Ed}}$$

$$\sigma_3 = \frac{N_{Ed}}{A_t} - \frac{M_{y,Ed}}{W_y} + \frac{M_{x,Ed}}{W_x} \quad \sigma_4 = \frac{N_{Ed}}{A_t} - \frac{M_{y,Ed}}{W_y} - \frac{M_{x,Ed}}{W_x} \quad e_y = \frac{M_{y,Ed}}{N_{Ed}}$$

U slučaju da je  $e > L/6$  potrebna je redukcija temeljne stope!

| Kombinacije opterećenja | $e_x$<br>(cm) | $L_x/6$<br>(cm) | $e_y$<br>(cm) | $L_y/6$<br>(cm) |
|-------------------------|---------------|-----------------|---------------|-----------------|
| (Mmax, Nprip)           | 34,30         | 50,00           | 25,76         | 50,00           |
| (Nmax, Mprip)           |               |                 |               |                 |
| .                       |               |                 |               |                 |
| .                       |               |                 |               |                 |

| Kombinacije opterećenja | $\sigma_1$<br>(kPa) | $\sigma_2$<br>(kPa) | $\sigma_3$<br>(kPa) | $\sigma_4$<br>(kPa) |
|-------------------------|---------------------|---------------------|---------------------|---------------------|
| (Mmax, Nprip)           | 50,21               | 94,68               | 35,55               | 0,00                |
| (Nmax, Mprip)           |                     |                     |                     |                     |
| .                       |                     |                     |                     |                     |
| .                       |                     |                     |                     |                     |

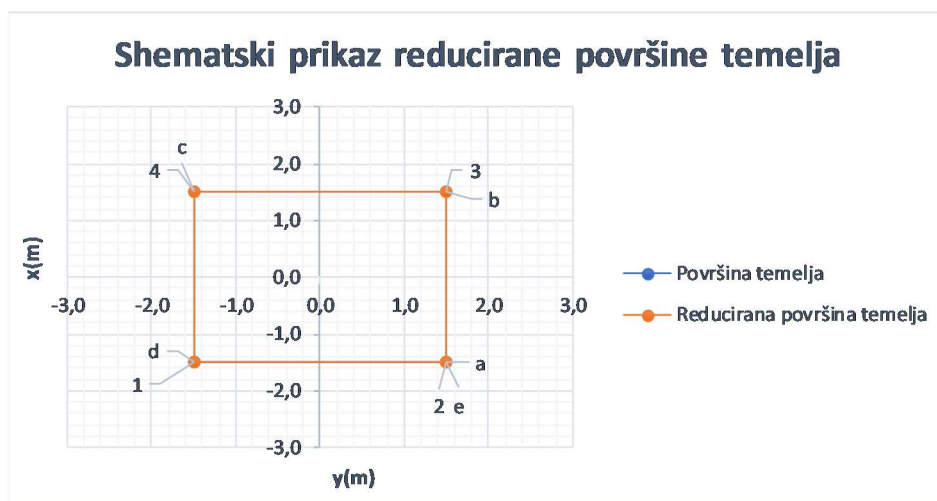 $\sigma_{max}$ 

94,68 kPa

&lt;

 $\sigma_{dop}$ 

325 kPa

Zadovoljava!

## PRORAČUN POTREBNE ARMATURE U TEMELJU

| Kombinacije opterećenja | x-smjer |         |                           | y-smjer |         |                           |
|-------------------------|---------|---------|---------------------------|---------|---------|---------------------------|
|                         | $\mu A$ | $\zeta$ | As1<br>(cm <sup>2</sup> ) | $\mu B$ | $\zeta$ | As1<br>(cm <sup>2</sup> ) |
| Kritična kombinacija    | 0,004   | 0,987   | 4,19                      | 0,004   | 0,987   | 4,56                      |

Napomena: As1 je ukupna armatura potrebna u temeljnoj stopi u jednom smjeru!


| Potrebna armatura | x-smjer            |                       | y-smjer            |                       |
|-------------------|--------------------|-----------------------|--------------------|-----------------------|
|                   | (cm <sup>2</sup> ) | (cm <sup>2</sup> /m') | (cm <sup>2</sup> ) | (cm <sup>2</sup> /m') |
| Potrebna armatura | 4,19               | 1,40                  | 4,56               | 1,52                  |

Minimalna armatura u temelju:  $A_{smin} = \boxed{6,50}$  (cm<sup>2</sup>/m')  $A_{smin} = 0.0013 \cdot b \cdot d$


|                 | x-smjer                  | y-smjer                  |
|-----------------|--------------------------|--------------------------|
| Odabrana mreža  |                          |                          |
| Odabrane šipke  | Ø12 / 15                 | Ø12 / 15                 |
| Ukupna armatura | 7,54 cm <sup>2</sup> /m' | 7,54 cm <sup>2</sup> /m' |

## 6.1.1.3. Odabrana armatura za temelj pozicije „TS3“

U donju i gornju zonu postaviti šipkastu armaturu Ø 12/15 ( $A_s = 6.79 \text{ cm}^2/\text{m}'$ ) obostrano. Po rubu temelja postaviti konstruktivnu armaturu 2Ø10.

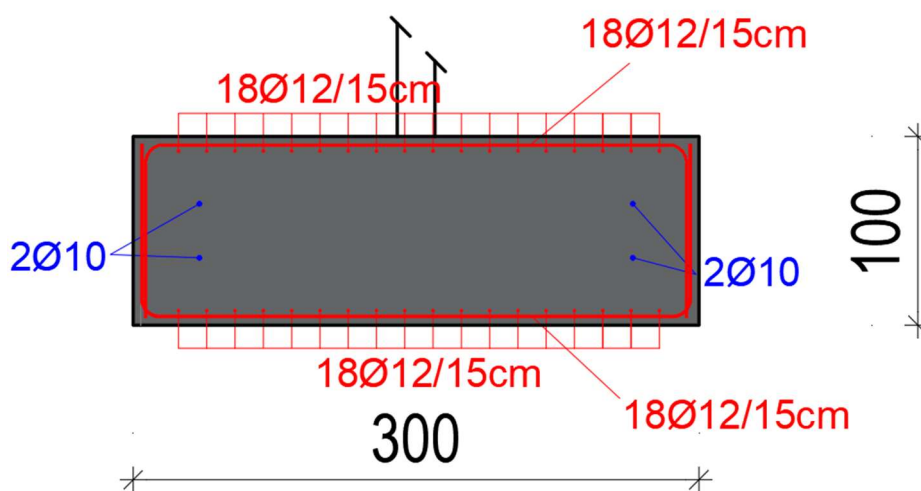


## **7. Nacrti**



Čelik nosačima:  
 - Za dimenzije od 200x200 do 300x300  
 - Za savijanje prema EN 1993-1-1:2004, prilozi 1-3, 5-7, 8-10, 12-13  
 - Čelik: S235, S275  
 - Vrednosti nosivosti određene su po EN 1993-1-1:2004, prilozi 1-3, 5-7, 8-10, 12-13  
 - Čelik: S235, S275

**LEGENDA ČELIČNIH ELEMENATA**

|   |                             |
|---|-----------------------------|
| <b>S1</b> stup vanjske nadstrešnice       | ○ - CFCHS 219.1x12.5 (S355) |
| <b>S2</b> stup niskog dijela nadstrešnice | ○ - CFCHS 355.6x8.0 (S355)  |
| <b>S3</b> rubni stup nadstrešnice         | ○ - CFCHS 355.6x8.0 (S355)  |

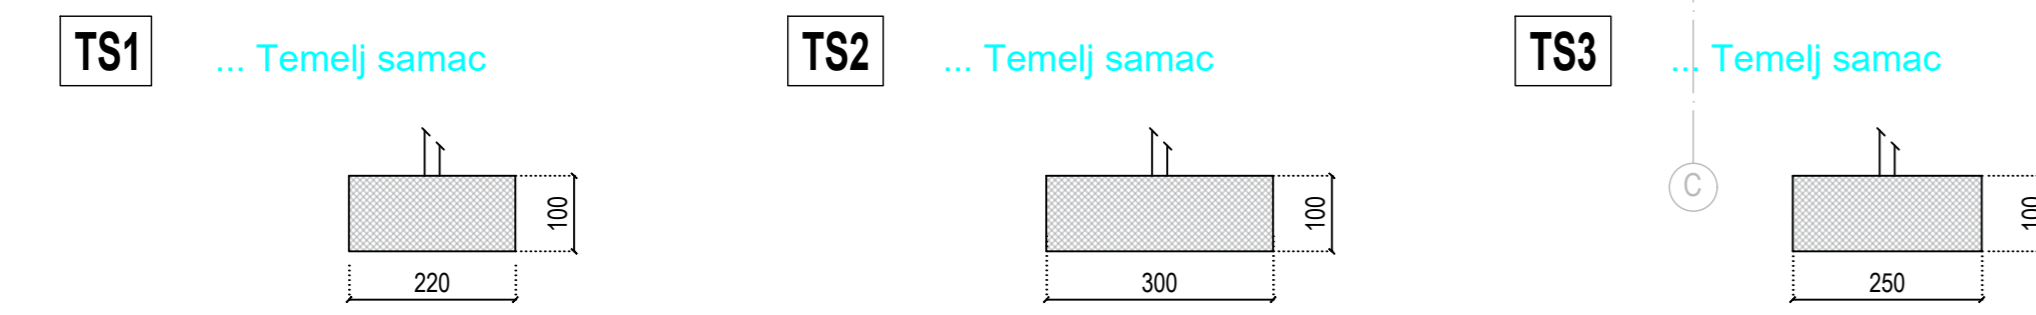

PLAN POZICIJA TEMELJA VANJSKE NADSTREŠNICE  
 M 1:100

BETON: C30/37  
 ARMATURA: S235

KLASIFIKACIJA OČIGLEDNE  
 ZASTITE: S111-3-000  
 MARKIRANJE ŽRNO: A308/300

|                     |  |                 |              |
|---------------------|--|-----------------|--------------|
|                     | DIPLOMSKI RAD  |                 |              |
|                     | TITRA: GLAVNI PROJEKT NADSTREŠNICE "KING CROSS"                          |                 |              |
|                     | MENTORICA: dr.sc. Ivica Boko   |                 |              |
|                     | STUDENT: Filip Čoga  |                 |              |
|                     | NADRAZAK: Plan pozicija temelja vanjske nadstrešnice između osi N1 i N12 |                 | ŠKALA: 1:100 |
| DATUM: lipanj 2023. |  | BROJ PRILOGA: 1 |              |





**LEGENDA ČELIČNIH ELEMENATA**


- S1 stup vanjske nadstrešnice    ○ - CFCHS 219x12,5 (S355)
- TS1 stup niskog dijela nadstrešnice    ○ - CFCHS 355x6x8,0 (S355)
- TS3 rubni stup nadstrešnice    ○ - CFCHS 355x6x8,0 (S355)

© 2023. Sveučilište u Splitu, Fakultet građevinarstva, arhitekture i inženjeringa  
 Sva prava zadržana. Ovo je dokument iz projekta "King Cross".  
 Sva prava zadržana. Ovo je dokument iz projekta "King Cross".  
 Sva prava zadržana. Ovo je dokument iz projekta "King Cross".

Karakteristični presjeci:  
 M 1:25


TS2 ... Temelj samac

Presjek 1-1:

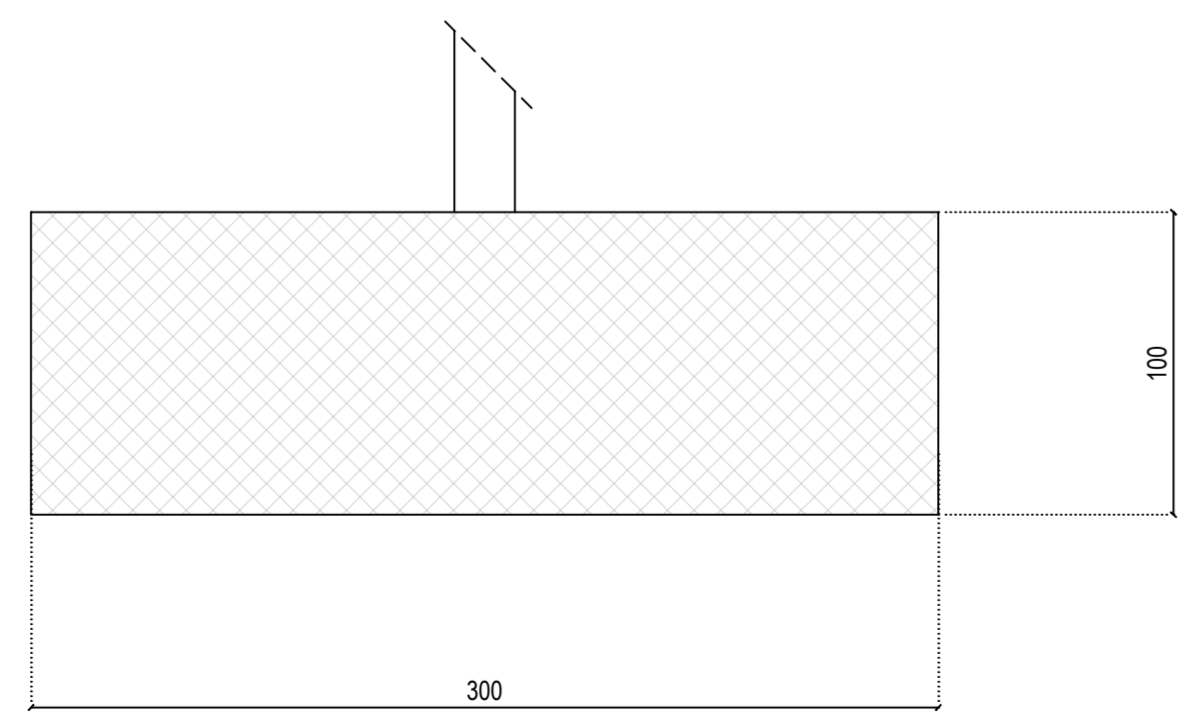


TS1 ... Temelj samac

Presjek 2-2:

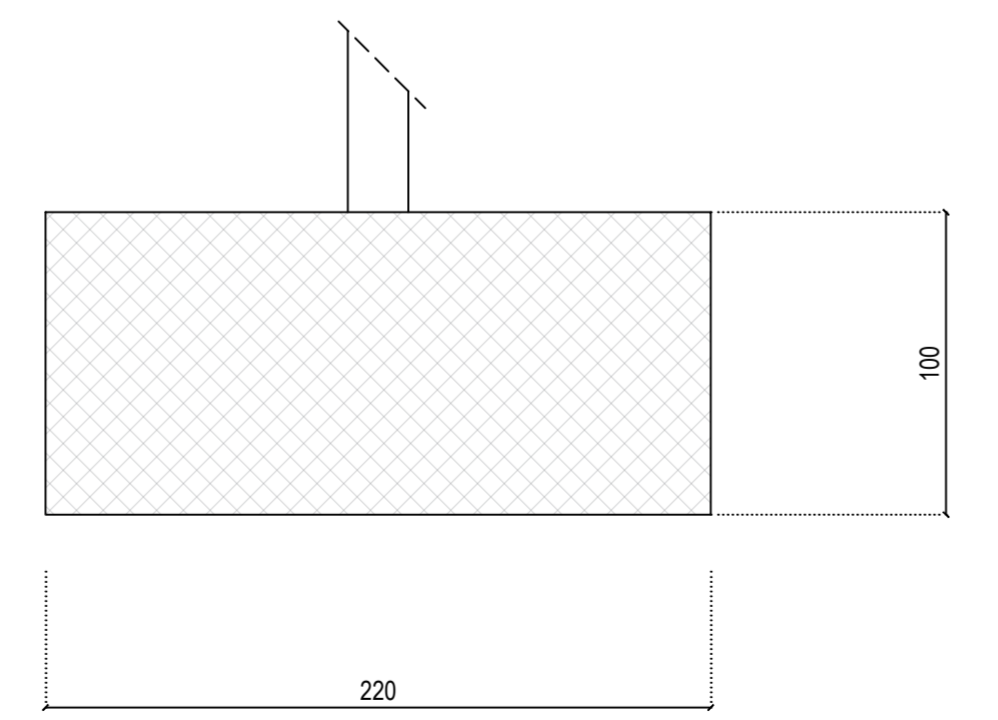

TS3 ... Temelj samac


Presjek 3-3:

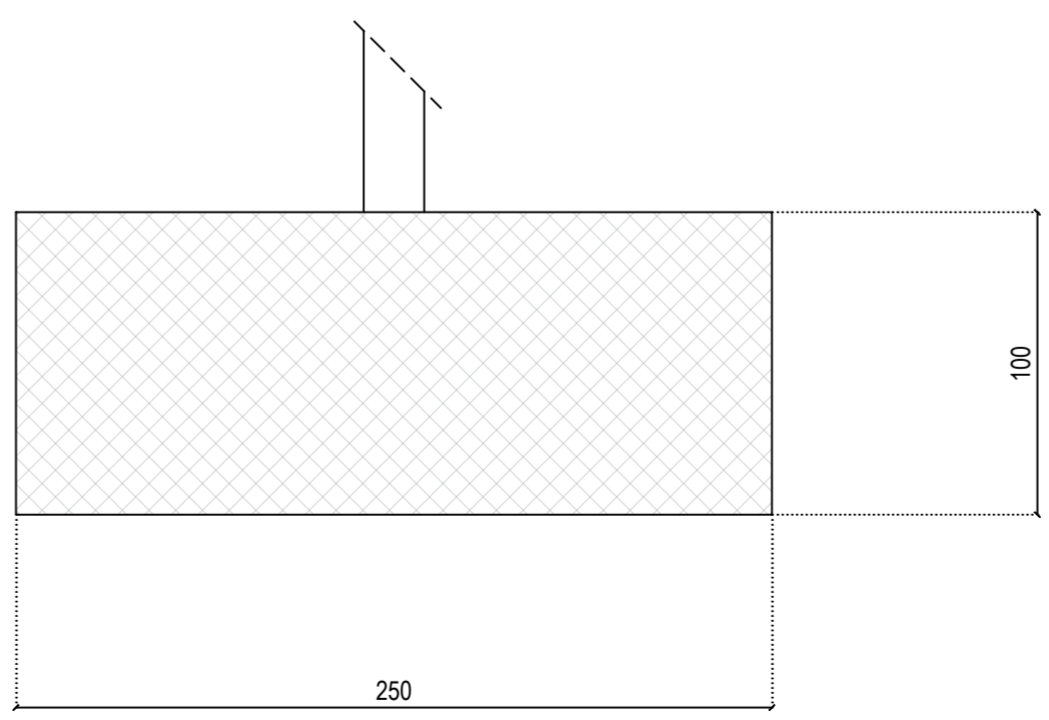

**PLAN POZICIJA TEMELJA VANJSKE NADSTREŠNICE**  
 M 1:100

IZ OBLASTI GRAĐEVINARSTVA I ARHITEKTURE  
 SVUČILIŠTE U SPLITU, FAKULTET GRAĐEVINARSTVA, ARHITEKTURE I INŽENJERINGA  
 SVUČILIŠTE U SPLITU, FAKULTET GRAĐEVINARSTVA, ARHITEKTURE I INŽENJERINGA  
 SVUČILIŠTE U SPLITU, FAKULTET GRAĐEVINARSTVA, ARHITEKTURE I INŽENJERINGA

|  |  |                |
|--|--|----------------|
|  | DIPLOMSKI RAD                            |                |
|  | GLAVNI PROJEKT NADSTREŠNICE "KING CROSS" |                |
|  | dr. sc. Ivica Bekić                      |                |
|  | Filip Čopa                               |                |
| Projekt: Plan pozicija temelja vanjske nadstrešnice (opisni rad N13) N27 |  | Mjerilo: 1:100 |
| Datum: lipanj 2023.  |  | Stranica: 2    |



**LEGENDA:**

|                                      |                             |
|--------------------------------------|-----------------------------|
| [S1] stup vanjske nadstrešnice       | ○ - CFCHS 219x12,5 (S355)   |
| [S2] stup niskog dijela nadstrešnice | ○ - CFCHS 355.6x8.0 (S355)  |
| [S3] rubni stup nadstrešnice         | ○ - CFCHS 355.6x8.0 (S355)  |
| [SK1] kosi dio stupa S1              | ○ - CFCHS 219.1x12.5 (S355) |
| [PK] krovni nosači                   | ○ - CFCHS 273x8.0 (S355)    |

Ukupna površina: 101,11 m<sup>2</sup>  
 Ukupna dužina: 101,11 m  
 Ukupna težina: 101,11 t  
 Ukupna težina: 101,11 t  
 Ukupna težina: 101,11 t


PLAN POZICIJA ELEMENATA VANJSKE NADSTREŠNICE  
 M 1:100

BETON C 30/37  
 ARMATURA S355

KLASIFIKACIJA OČIŠĆENJA  
 ZAŠTITA SULLUVA-30mm  
 VARNOSTNA ŽRNO ADRS24/1.20mm

|                    |   |                    |
|--------------------|---|--------------------|
|                    | <b>DIPLOMSKI RAD</b>  |                    |
|                    | TITRA: GLAVNI PROJEKT NADSTREŠNICE "KING CROSS"                         |                    |
|                    | MENTORICA: dr.sc. Ivica Boko  |                    |
|                    | STUDENT: Filip Čoga   | BRIGADNIŠKI: 1:100 |
|                    | TITRA: Plan pozicija elemenata vanjske nadstrešnice između osi N1 i N12 |                    |
| DATA: lipanj 2023. | BRIGADNIŠKI: 1:100  | 3                  |



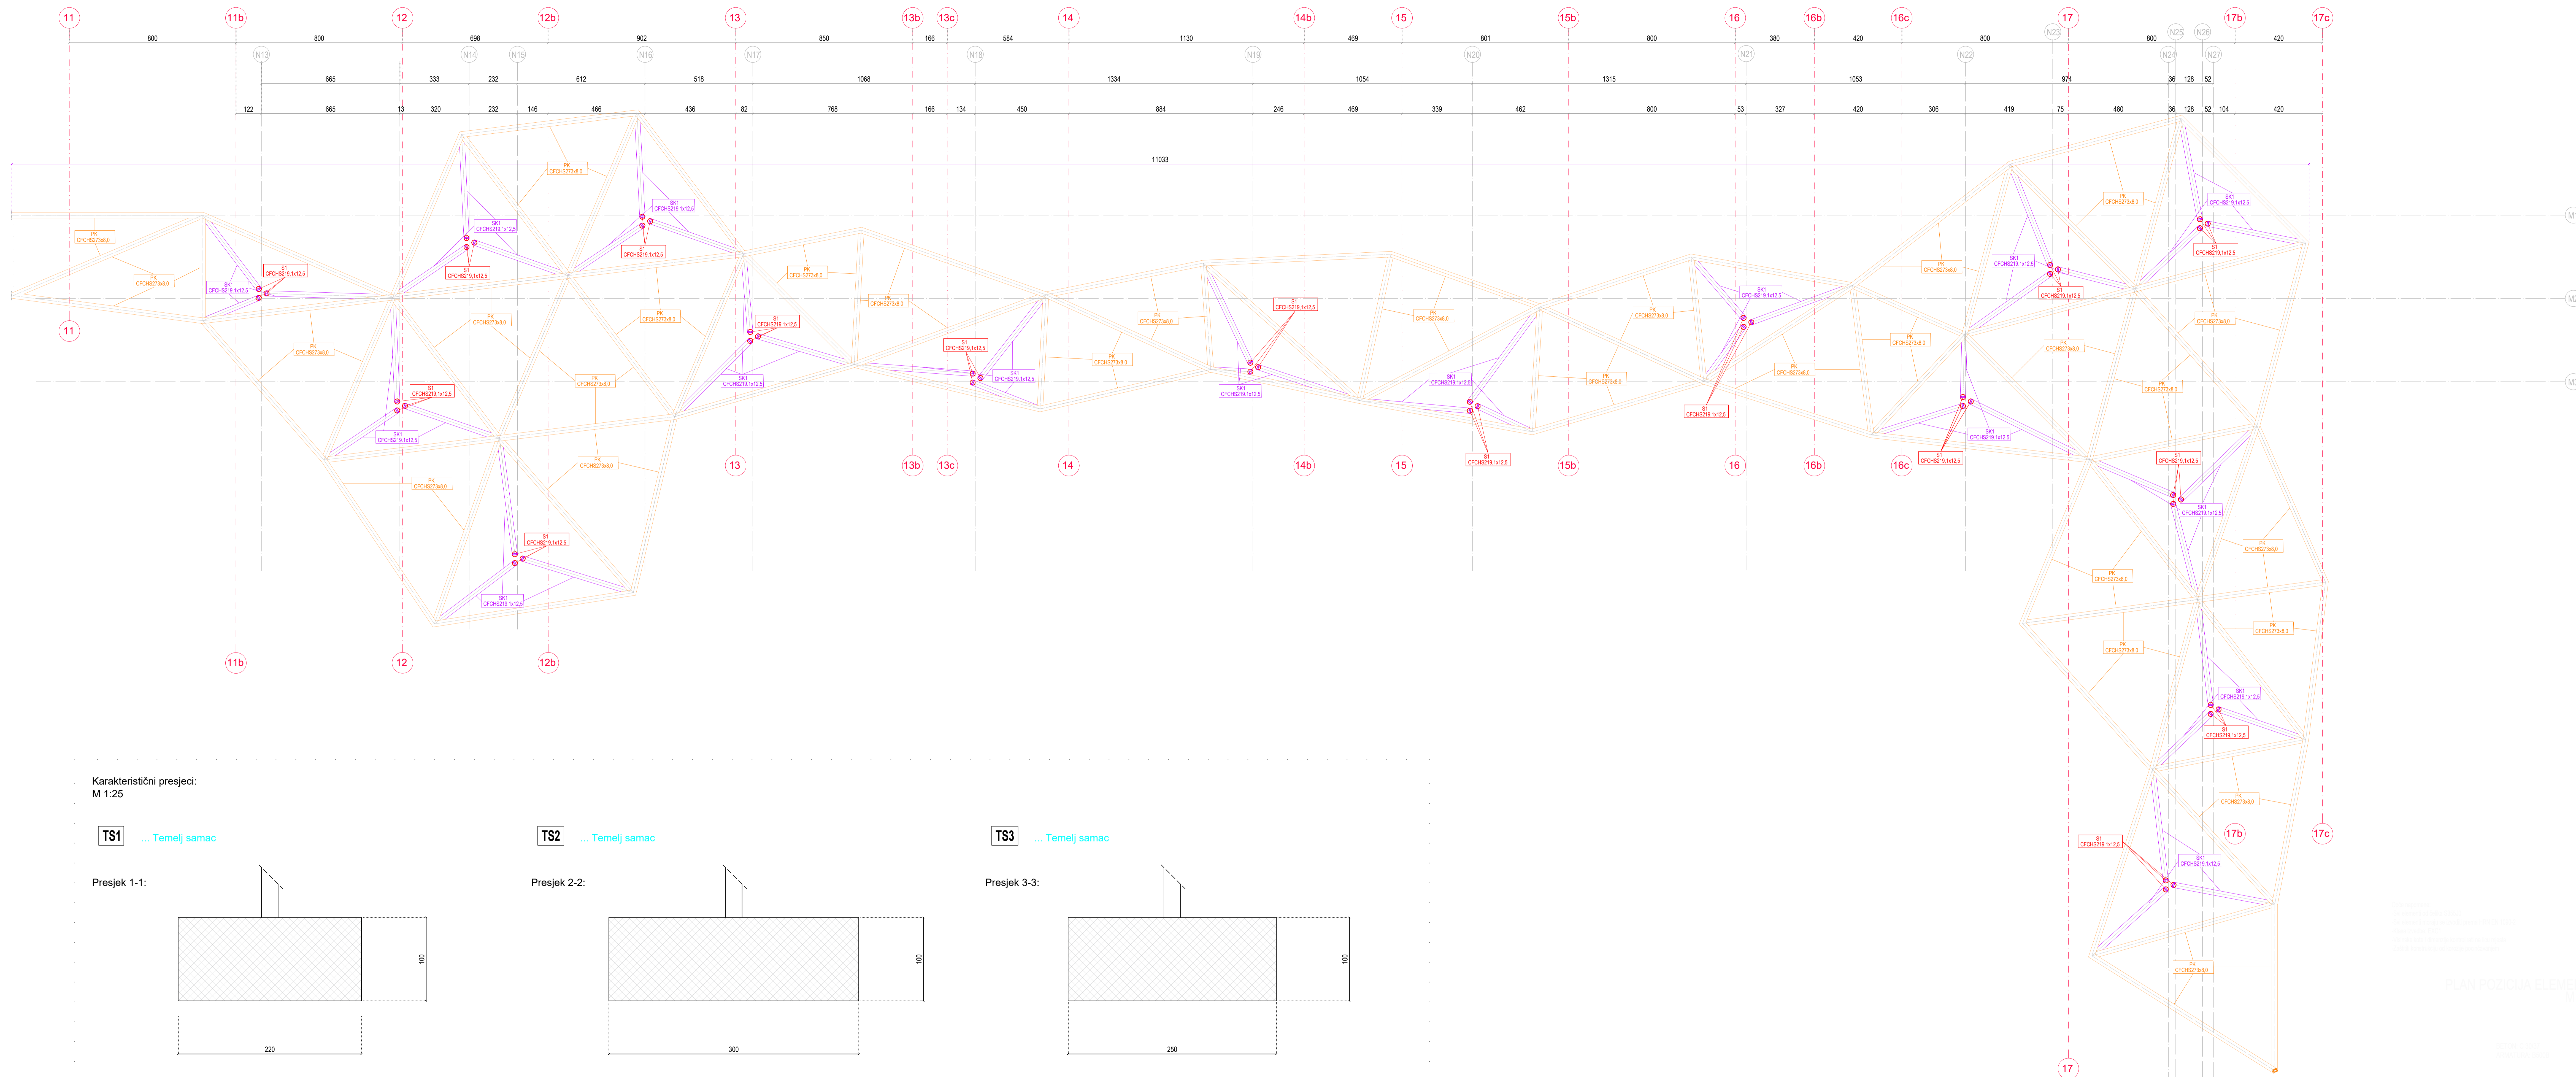


**LEGENDA:**

|                                      |                             |
|--------------------------------------|-----------------------------|
| [S1] step vanjske nadstrešnice       | ○ - CFCHS 219x12,5 (S355)   |
| [S2] step niskog dijela nadstrešnice | ○ - CFCHS 355,6x8,0 (S355)  |
| [S3] rubni step nadstrešnice         | ○ - CFCHS 355,6x8,0 (S355)  |
| [SK1] nosi do stupa S1               | ○ - CFCHS 219,1x12,5 (S355) |
| [PK] izvorni nosači                  | ○ - CFCHS 273x8,0 (S355)    |

Karakteristični presjeci:  
M 1:25


**TS1** ... Temelj samac

Presjek 1-1:

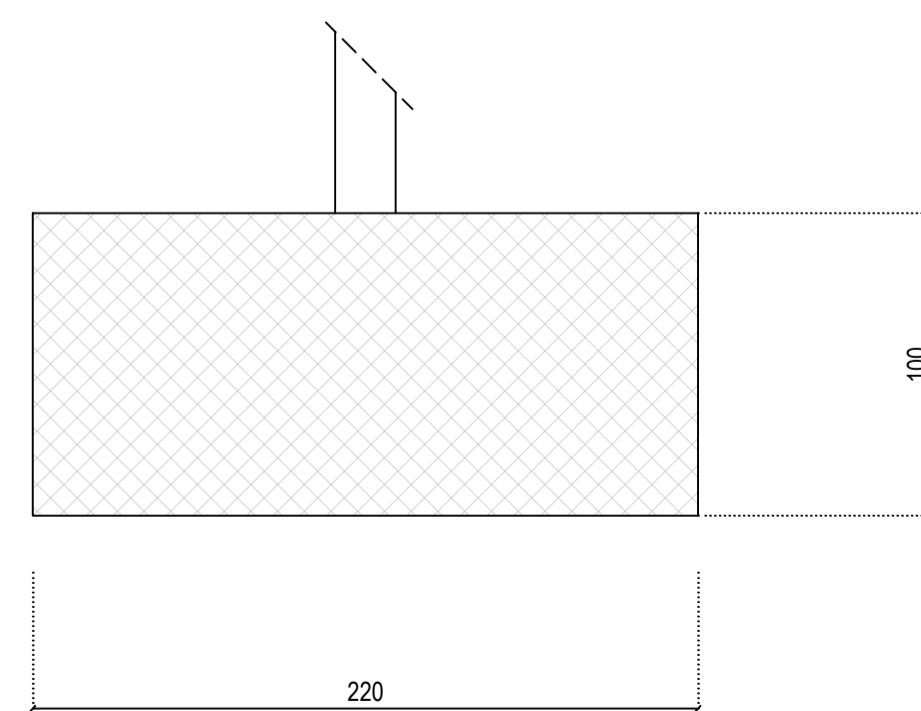


**TS2** ... Temelj samac

Presjek 2-2:

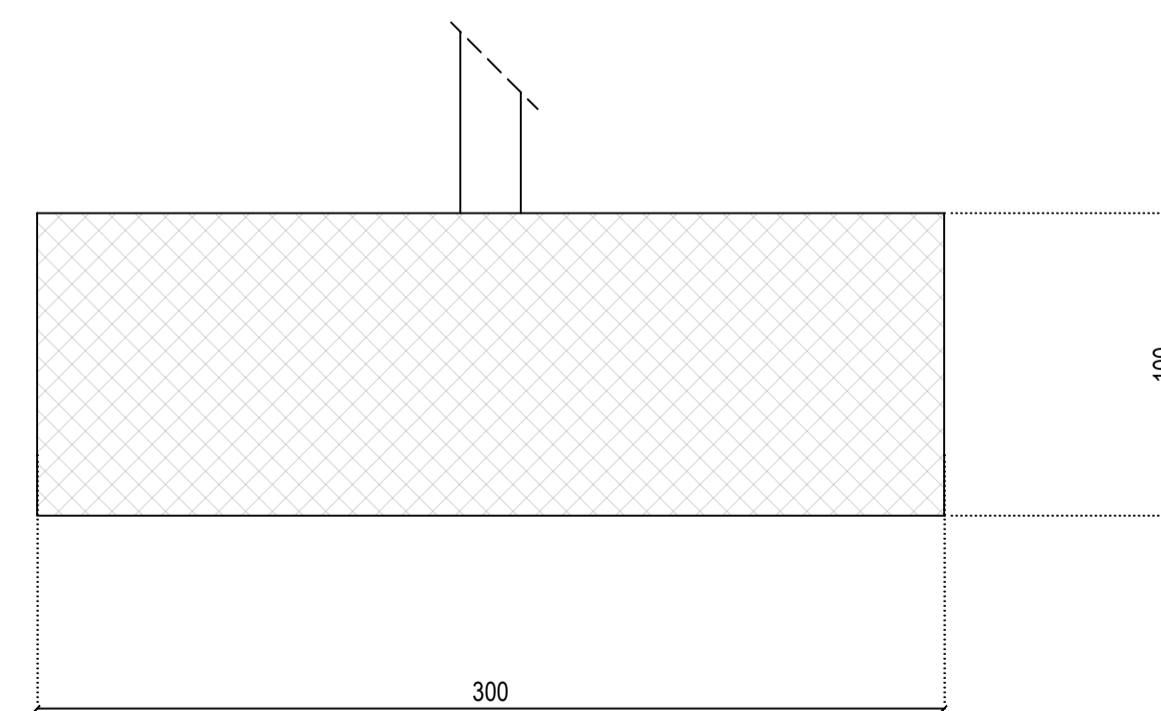

**TS3** ... Temelj samac

Presjek 3-3:

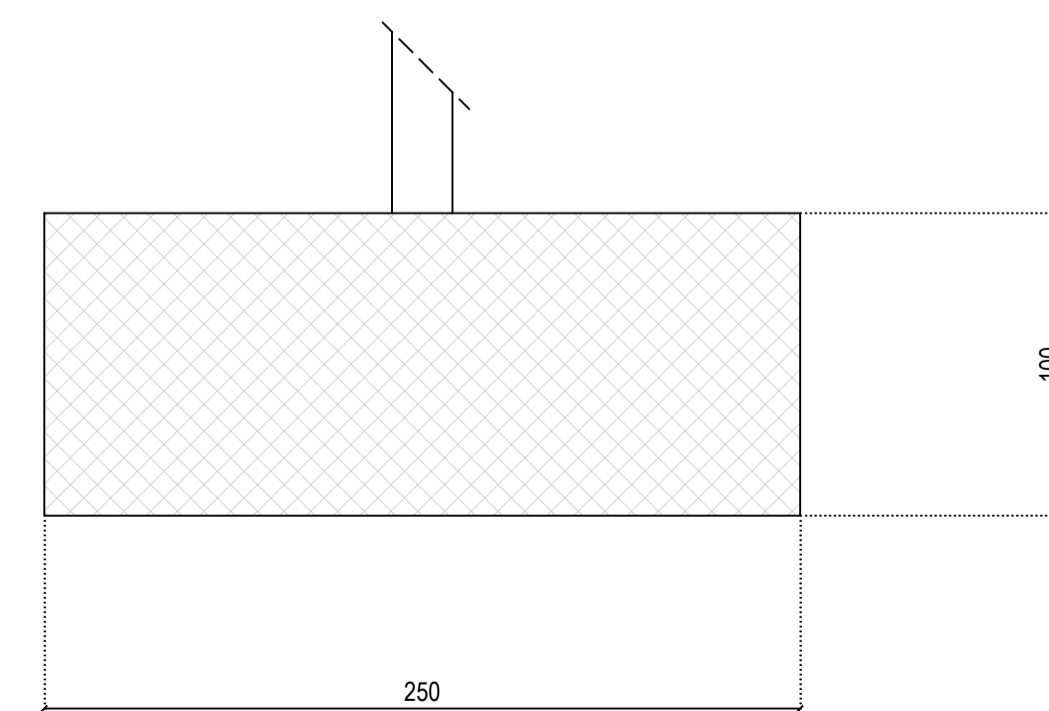


PROJEKTOVALNA IZJAVA  
 Izvršio: Filip Čigrić  
 Izradio: Filip Čigrić  
 Datum: 15.05.2023.  
 Ovlaštenje: 01/2023-2028  
 Ovlaštenje: 01/2023-2028

PLAN POZICIA ELEMENTA VANJSKE NADSTREŠNICE  
M 1:100


PROJEKTOVALNA IZJAVA  
 Izvršio: Filip Čigrić  
 Izradio: Filip Čigrić  
 Datum: 15.05.2023.  
 Ovlaštenje: 01/2023-2028  
 Ovlaštenje: 01/2023-2028

|   |  |              |  |
|---|--|--------------|--|
|   | DIPLOMSKI RAD                                  |              |  |
|   | Tema: GLAVNI PROJEKT NADSTREŠNICE "YING CROSS" |              |  |
|   | Autor: dr. sc. Ivica Bokić                     |              |  |
|   | Projektor: Filip Čigrić                        |              |  |
| Predmet: Plan pozicija elemenata vanjske nadstrešnice i susedstva |  | Skica: 1:100 |  |
| Datum: 15.05.2023.  |  | Stranica: 4  |  |

Presjek 1-1:

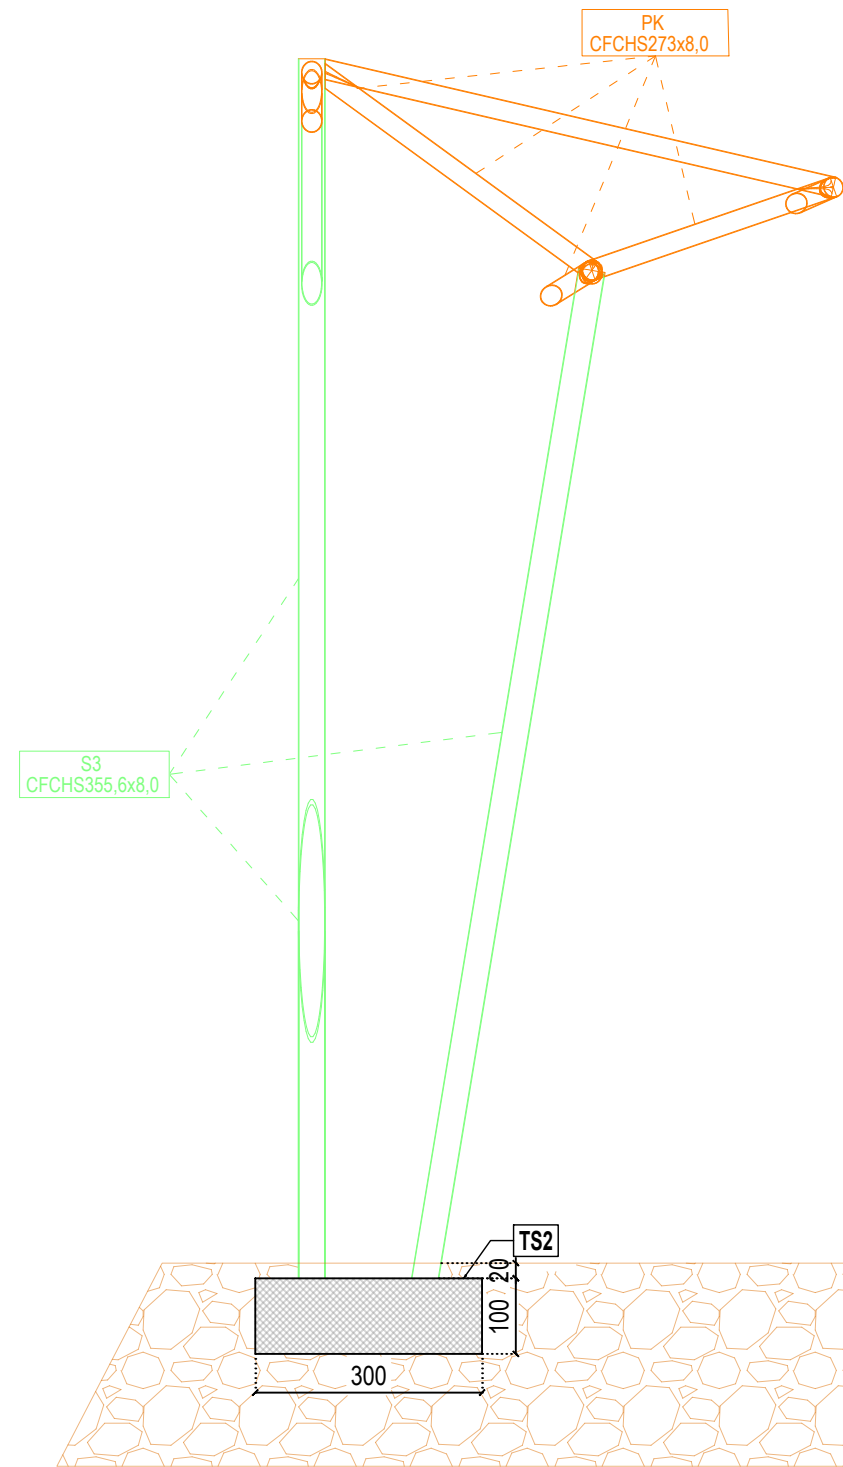

Presjek 2-2:

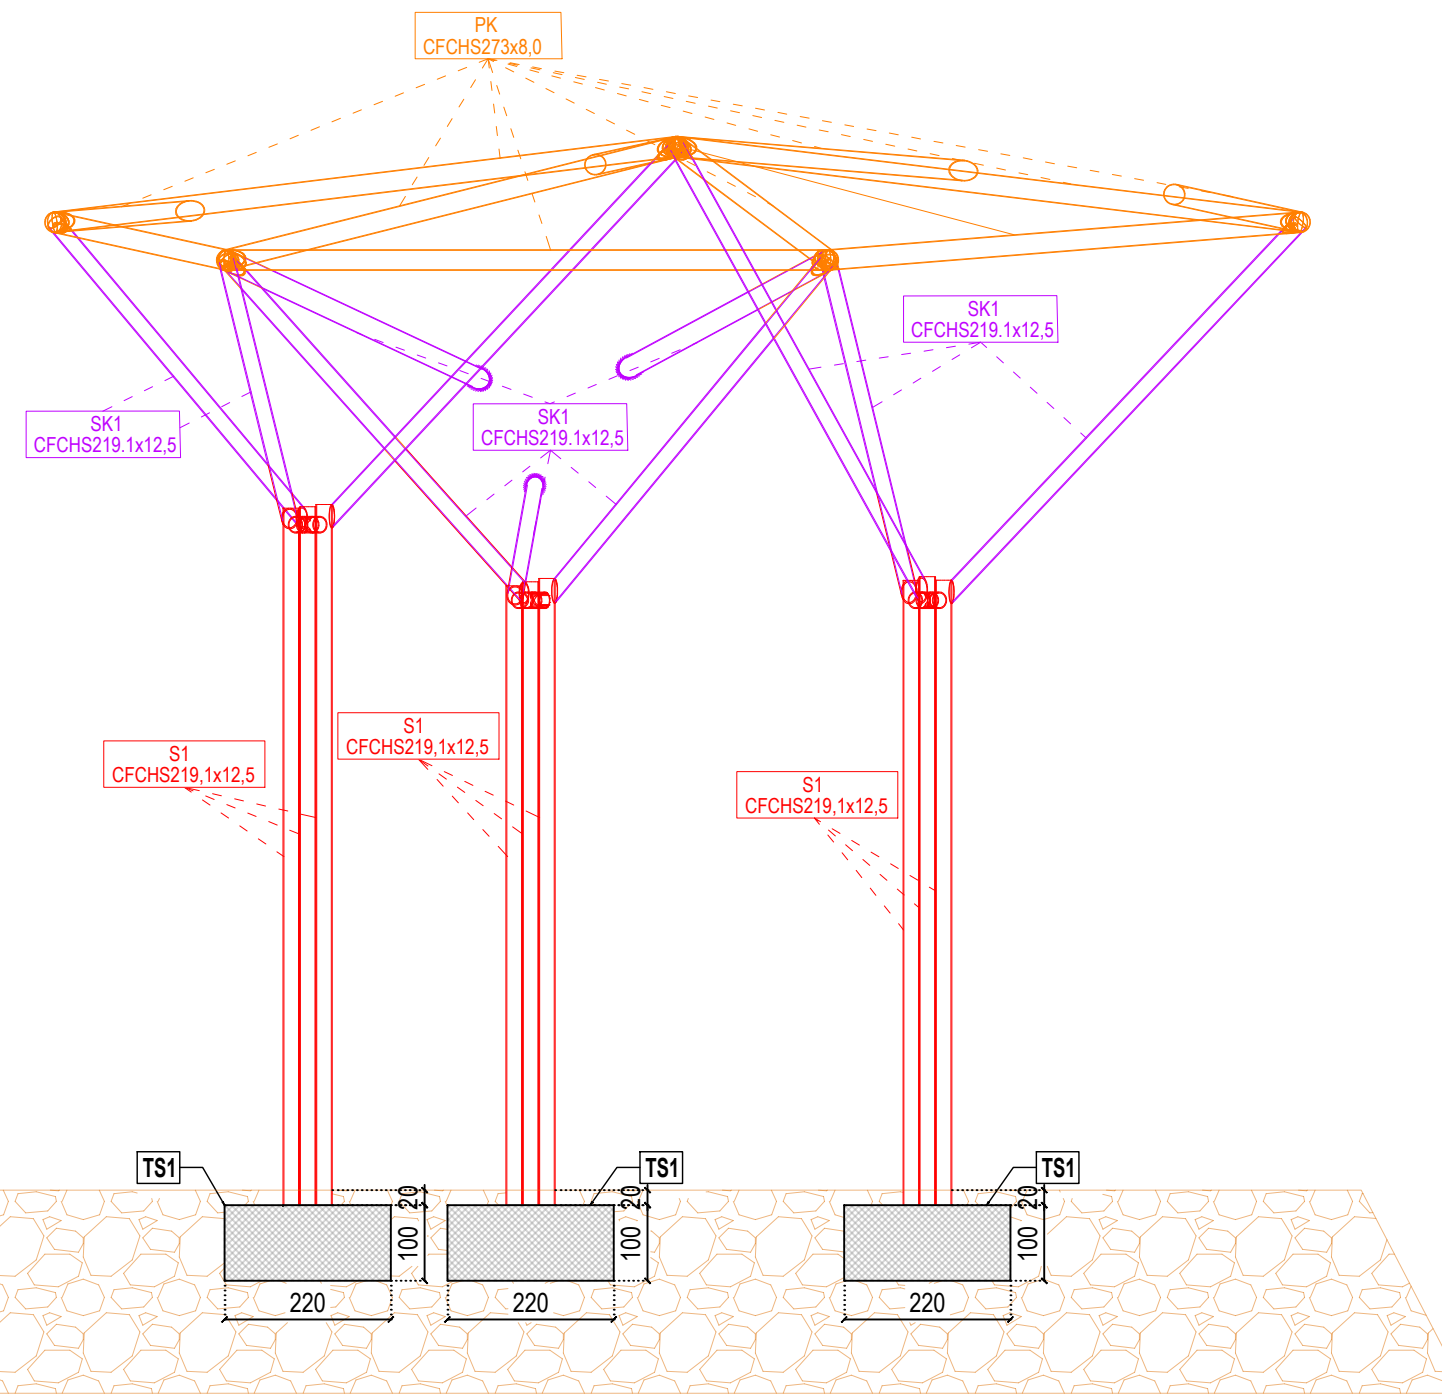


LEGENDA:

- S1 stup vanjske nadstrešnice
- S2 stup niskog dijela nadstrešnice
- S3 rubni stup nadstrešnice
- SK1 kosi dio stupa S1
- PK krovni nosači
- CFCHS 219x12,5 (S355)
- CFCHS 355,6x8,0 (S355)
- CFCHS 355,6x8,0 (S355)
- CFCHS 219,1x12,5 (S355)
- CFCHS 273x8,0 (S355)


Dijela napomene:  
 -Svi elementi od čelika S355,0  
 -Svi elementi moraju se izvoditi prema HRN EN 1090-2  
 -Klasa izvedbe: EXC1  
 -Visine kole i dimenzije kontrolirati na licu mjesta  
 -Zaštiti konstrukciju od korozije podičavanjem

PRESJEK 1-1 I 2-2  
 M 1:100

BETON: C 30/37  
 ARMATURA: B500B  
 KLASA IZLOŽENOSTI XC2, XF4  
 ZAŠTITNI SLOJ:  $\geq 3$  5mm  
 MAKSIMALNO ZRNO AGREGATA: 32mm

|   |  |                |
|---|--|----------------|
|  <p>SVEUČILIŠTE U SPLITU,<br/>         FAKULTET GRAĐEVINARSTVA,<br/>         ARHITEKTURE I GEODEZIJE</p> | DIPLOMSKI RAD                                  |                |
|   | TEMA: GLAVNI PROJEKT NADSTREŠNICE "KING CROSS" |                |
|   | MENTORICA: dr.sc. Ivica Boko                   |                |
|   | STUDENT: Filip Čoga                            |                |
|   | SADRŽAJ: Presjek 1-1 i 2-2                     | MJERILO: 1:100 |
| DATUM: lipanj 2023.   | BROJ PRILOGA: 5                                |                |



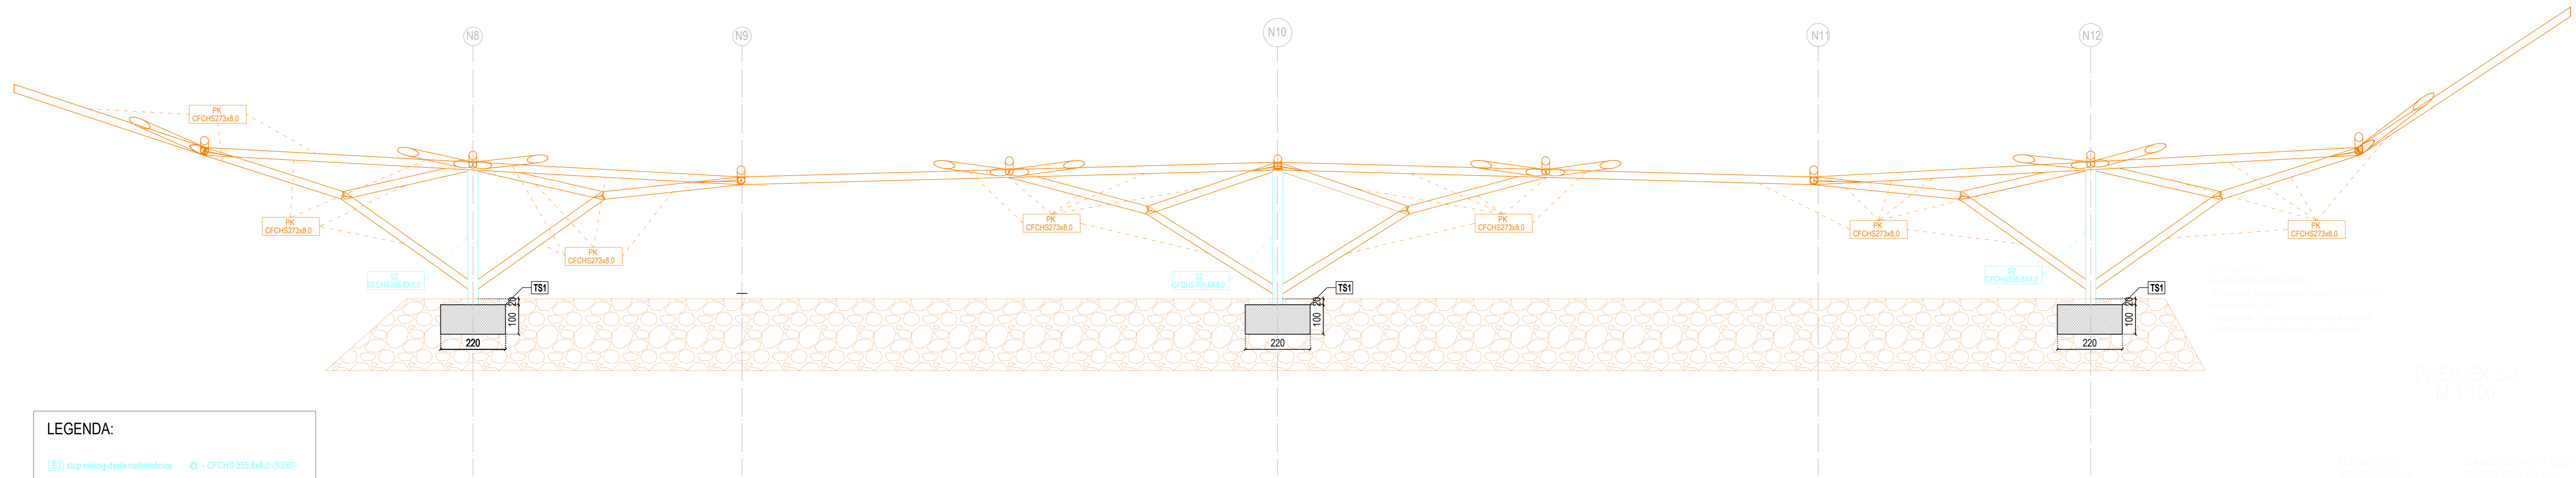


Opće napomene:  
 - Svi elementi od čelika S355,0  
 - Svi elementi izrađuju se prema HRN EN 1090-2  
 - Klasa čelika: S355  
 - Klase čelika i dimenzije postrobnih na licu mesta  
 - Zaštita korozivnosti od korozije građevinske


PRESJEK 3-3  
 M 1:100

BETON: C30/37  
 ARMATURA: B500C  
 KLASA IZI OČVENOSTI: XC2, XC4  
 ZAŠTITNI SLOJ: c=3,5mm  
 MAKIMALNO ZRNO AGREGATA: 32mm

**LEGENDA:**

|   |  |
|---|--|
| <span style="border: 1px solid cyan; padding: 2px;">S2</span> stup niskog dijela nadstrešnice | <span style="color: cyan;">○</span> - CFCHS 355,6x8,0 (S355) |
| <span style="border: 1px solid orange; padding: 2px;">PK</span> krovni nosači                 | <span style="color: orange;">○</span> - CFCHS 273x8,0 (S355) |

|  |  |                 |
|--|--|-----------------|
| <br><b>SVEUČILIŠTE U SPLITU,</b><br><b>FAKULTET GRAĐEVINARSTVA,</b><br><b>ARHITEKTURE I GEODEZIJE</b> | <b>DIPLOMSKI RAD</b>                           |                 |
|  | TEMA: GLAVNI PROJEKT NADSTREŠNICE "KING CROSS" |                 |
|  | MENTORICA: dr.sc. Ivica Boko                   |                 |
|  | STUDENT: Filip Čoga                            |                 |
|  | SADRŽAJ: Presjek 3-3                           | MJERILO: 1:100  |
| DATUM: lipanj 2023.  |  | BROJ PRILOGA: 6 |

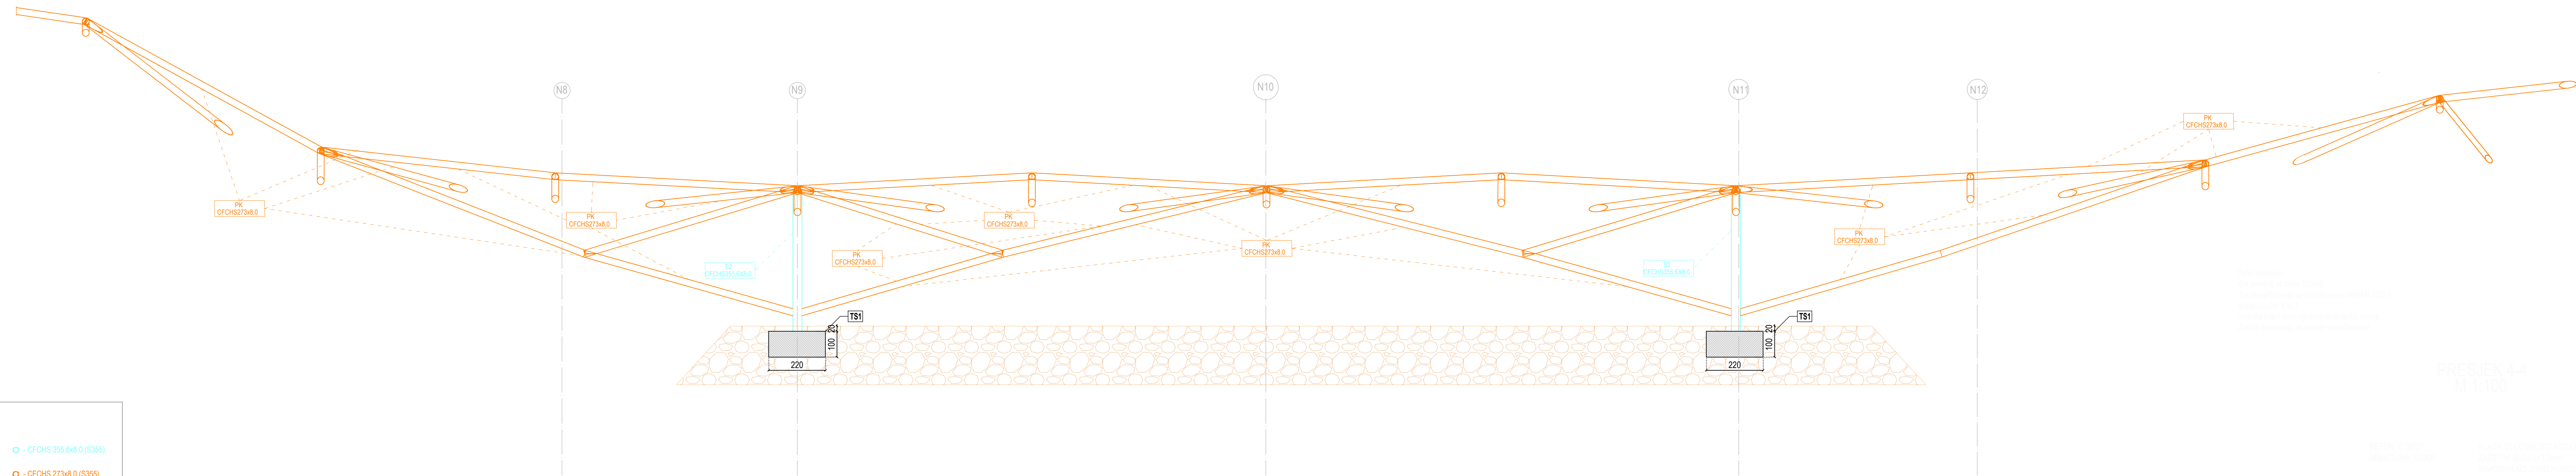


Opisni napomena:  
 - Svi elementi su izrađeni od čelika S235JR  
 - Svi elementi nosači su izrađeni prema EN 1090-2  
 - Aluina izvedba: EXC3  
 - Vrijednosti i dimenzije navedene su po projektu  
 - Zahtjevi konstruktivni su navedeni priloženim

PRESJEK 4-4  
 M 1:100

BETON: C 20/25  
 ARMATURA: S235JR  
 KLASA ISPOREKOSTI: XC2, XF4  
 ZAŠTITNI SLOJ: c=30mm  
 MAXIMALNO ZRNO AGREGATA: 20mm

**LEGENDA:**

|   |  |
|---|--|
| <span style="border: 1px solid blue; padding: 2px;">S2</span> stup niskog dijela nadstrešnice | <span style="color: blue;">○</span> - CFCHS 355,6x8,0 (S355) |
| <span style="border: 1px solid orange; padding: 2px;">PK</span> krovni nosači                 | <span style="color: orange;">○</span> - CFCHS 273x8,0 (S355) |

|  |                      |  |
|--|----------------------|--|
|  <p>SVEUČILIŠTE U SPLITU,<br/>         FAKULTET GRAĐEVINARSTVA,<br/>         ARHITEKTURE I INŽENJERINGA</p> | <b>DIPLOMSKI RAD</b> |  |
|  | TEMA:                | GLAVNI PROJEKT NADSTREŠNICE "KING CROSS" |
|  | MENTORICA:           | dr.sc. Ivica Boko                        |
|  | STUDENT:             | Filip Čoga                               |
| SADRŽAJ:   | Presjek 4-4          | MJERILO: 1:100                           |
| BRIGADIR:  |                      | BRIGADIR: 7                              |
| DATUM:   | lipanj 2023.         |  |

## **8. Literatura**

- [1] Androić, Dujmović, Džeba, Metalne konstrukcije 1, IGH Zagreb, 1994.
- [2] Androić, Dujmović, Džeba, Metalne konstrukcije 2, IA Projektiranje Zagreb, 1995.
- [3] Androić, Dujmović, Džeba, Metalne konstrukcije 3, IA Projektiranje Zagreb, 1995.